




MEM-CO FITTINGS INC.
45 Gigante Drive
Hampstead, NH 03841
Phone # (603) 329-9633
Fax # (603) 329-4633

MEM-CO is a manufacturer of quality manifolds for low and medium pressure applications. Manufactured from a variety of metals and plastics, the manifolds are compatible with most fluids and gases. Manifolds with 2 thru 10 ports are available from stock. Threaded and push type connections are available. Custom sizes and configurations will be considered.



- ⇒ Delrin
- ⇒ Nylon
- ⇒ Polypropylene
- ⇒ Kynar
- ⇒ PVC
- ⇒ Teflon
- ⇒ Aluminum
- ⇒ Brass
- ⇒ Stainless Steel

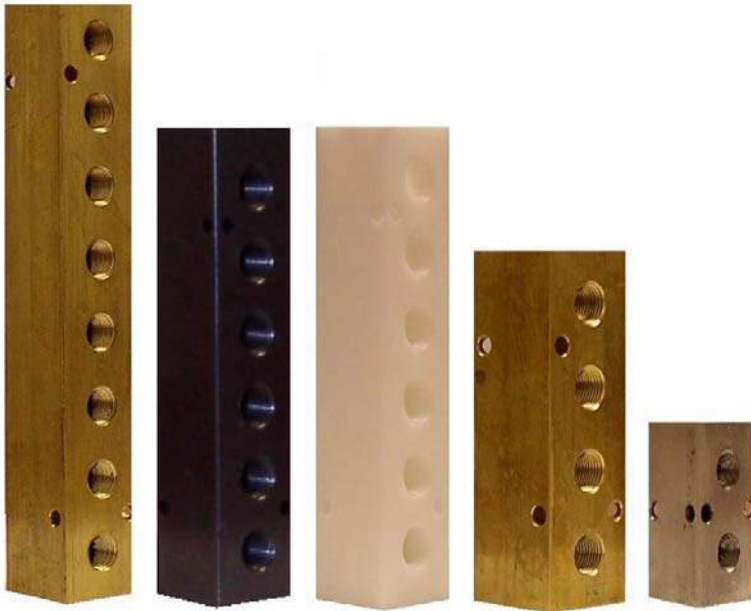

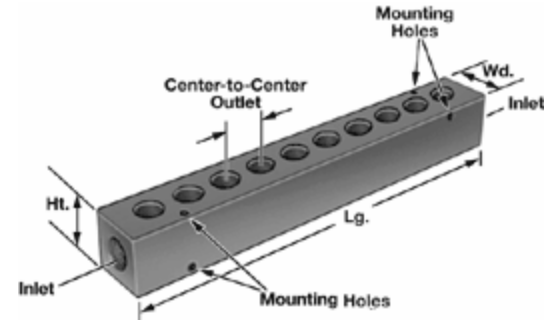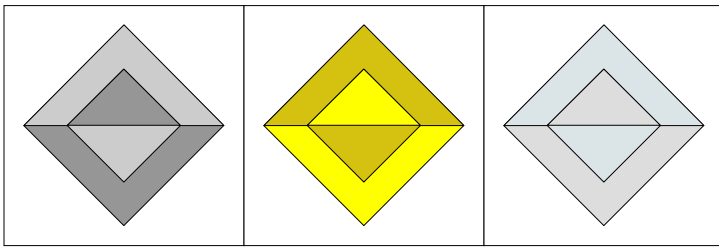

No. of Outlets	Inlet Pipe Size	Outlet Pipe Size	Lg.	Wd.	Ht.	Outlet Ctr to Ctr	Mtg Hole Ctr to Ctr	Mtg Hole Size
2	1/4"	1/8"	1-3/4"	1"	1"	3/4"	0	.17"
2	3/8"	1/4"	2-3/8"	1-1/4"	1-1/4"	7/8"	0	.20"
2	1/2"	3/8"	2-3/4"	1-1/2"	1-1/2"	1"	0	.20"
4	1/4"	1/8"	3-1/4"	1"	1"	3/4"	1-1/2"	.17"
4	3/8"	1/4"	4-1/8"	1-1/4"	1-1/4"	7/8"	1-3/4"	.20"
4	1/2"	3/8"	4-3/4"	1-1/2"	1-1/2"	1"	2"	.20"
6	1/4"	1/8"	4-3/4"	1"	1"	3/4"	3"	.17"
6	3/8"	1/4"	5-7/8"	1-1/4"	1-1/4"	7/8"	3-1/2"	.20"
6	1/2"	3/8"	6-3/4"	1-1/2"	1-1/2"	1"	4"	.20"
8	1/4"	1/8"	6-1/4"	1"	1"	3/4"	4-1/2"	.17"
8	3/8"	1/4"	7-5/8"	1-1/4"	1-1/4"	7/8"	5-1/4"	.20"
8	1/2"	3/8"	8-3/4"	1-1/2"	1-1/2"	1"	6"	.20"
10	1/4"	1/8"	7-3/4"	1"	1"	3/4"	6"	.17"
10	3/8"	1/4"	9-3/8"	1-1/4"	1-1/4"	7/8"	7"	.20"
10	1/2"	3/8"	10-3/4"	1-1/2"	1-1/2"	1"	8"	.20"

MAN 2 - 1/4 - PVG

No. of Outlets:	Inlet Pipe Size:	Manifold Material:	Temp Range:	Max PSI:
2	1/4"	ACN = Delrin Natural	-20 to +180 F	200 PSI
4	3/8"	ACB = Delrin Black	-20 to +180 F	200 PSI
6	1/2"	NYL = Nylon	-60 to +100 F	200 PSI
8		P = Polypropylene	+32 to +210 F	150 PSI
10		PLY = Polypropylene Black	+32 to +210 F	150 PSI
		PVD = PVDF	-65 to +230 F	150 PSI
		PVG = PVC Gray	+32 to +140 F	150 PSI
		PVW = PVC White	+32 to +140 F	150 PSI
		TEF = PTFE	+200 to +300 F	120 PSI
		ALB = Aluminum - BSPP (6061 Clear Anodized)	-65 to +250 F	1,000 PSI
		ALP = Aluminum - BSPT (6061 Clear Anodized)	-65 to +250 F	1,000 PSI
		ALN = Aluminum (6061 Black Anodized)	-65 to +250 F	1,000 PSI
		BR = 360 Brass	-65 to +250 F	2,000 PSI
		SS303 = 303 Stainless Steel	-65 to +250 F	3,500 PSI
		SS304 = 304 Stainless Steel	-65 to +250 F	3,500 PSI
		SS316 = 316 Stainless Steel	-65 to +250 F	3,500 PSI

Stock to 2 Week Delivery!