



MEAD

Full Line Catalog



Setting a new standard for:

- Actuators
- Valves
- Production Devices
- Safety



Table of Contents

1-3 Reference

- 1 Cylinder Finder
- 2-3 Valve Finder

4-25 Control Valves

- 4 Isonic®
- 5-6 Isonic® V1000 Series
- 7-9 Isonic® V2000 Series
- 10-11 Isonic® V4000 Series
- 12 Manifold PowerStrip™
- 13 Isonic® Accessories
- 14-15 Nova
- 16-17 Capsula
- 18 Dura-Matic 4-Way Valves
- 19 Ergonomic Low Stress Air Valve
- 20-21 LTV
- 22-23 MV 3-Way Switches
- 24-25 Cam, Foot, Hand and Button Valves

26-50 Cylinders

- 26-27 Small Bore Tie Rod
- 28-33 DM1 & DM2 NFPA Interchangeable
- 34-41 HD1 NFPA Heavy-Duty
- 42-43 Large Bore HD NFPA Heavy Duty
- 44-45 Centaur
- 46 Proximity Switches (Reed/Solid State)
- 47 Space Saver
- 48-49 Miniature Air Cylinders
- 50 Single-Acting Air Clamps

51-57 Specialty Valves

- 51 Lockout and Easy-Glide Ball Handle Valves
- 52 Mini Solenoid and Binary Valves
- 53 Air Timers and Impulse Relay Valves
- 54 Stroke Sensors and Air to Electric Switches
- 55 Dash/Panel Mount Control Valves
- 56 Dyla-Trol® Flow Controls
- 57 Two-Hand Control Valves

58-61 Production Devices

- 58 Air Presses
- 59 Heavy Multi-Stage Press
- 60 Air Press Dimensions
- 61 Air Tools

62-63 Accessories

- 62 RAF & RAFK: Right Angle Flow Controls
- 62 Female DIN Solenoid Connectors
- 62 Manifold
- 63 Quick Exhaust Valves
- 63 Shuttle Valves
- 63 Check Valves
- 63 Air Silencers & Breathers

64-68 Index

- 64 Custom Products
- 65-66 Product Index
- 67-68 Notes



Mead Fluid Dynamics, Inc.

Mead USA

4114 N. Knox Ave.
Chicago, IL 60641
Phone: (773) 685-6800
Fax: (773) 685-7002
Customer Service Toll Free Number:
(877) MEAD USA (877-632-3872)
sales@mead-usa.com

Visit www.mead-usa.com for downloadable:

- PDF Files
- CAD Drawings
- Exploded Views

Mead offers a wide selection of cylinder styles.

Dyna-Mation (DM/DM1/DM2)



NFPA Interchangeable
Extruded Body Design
1-1/2" Through 4" Bore Sizes
3/4" and 1-1/8" Tie Rod Models
Available

Heavy-Duty (HD1)



External Rod Bearing
NFPA Interchangeable
Tie Rod Design
1-1/2" Through 6" Bore Sizes

Large Bore (HD)



NFP Style Cylinders
Tie Rod Design
Bore Sizes: 5, 8, 10, 12

Centaur (C)



Medium Duty Round
Non-Lube Cylinder
Easy To Mount
1-1/8" Through 3" Bore Sizes

Space Saver (SS)



Highly Compact
Low Profile Cylinder
3/4" Through 4" Bore Sizes

Air Clamps (H)



Single-Acting Cylinders
Adjustable Stroke
Models Available
1" Through 6" Bore Sizes

Miniature (M)




Fractional Stroke Cylinders
Universal Mounting
1/4", 3/8" and 1/2" Bores

Bore	Model Number	Rod Diam (in.)	Port Size (NPTF)	Stroke Availability (in.)	Double or Single Acting	Output at 100 PSI (lbs.)	Max. Air Inlet Pressure (PSI)	Max. Oil Inlet Pressure (PSI)	Pages
1/4"	MA-250	.561	10-32	to 2	DA/SA	5	125	No	49-50
	MF-250	.561	10-32	to 2	DA/SA	5	125	No	49-50
3/8"	MA-375	.687	10-32	to 2	DA/SA	11	125	No	49-50
	MF-375	.687	10-32	to 2	DA/SA	11	125	No	49-50
1/2"	MA-500	.812	10-32	to 2	DA/SA	20	125	No	49-50
	MF-500	.812	10-32	to 2	DA/SA	20	125	No	49-50
3/4"	DM-075	5/16	1/8	Any	DA	44	250	1,000*	26-27
	SS-075	5/16	10-32	to 2	DA	44	250	No	47
1"	H-1	5/16	1/8	11/16	SA	68	150	No	48
	H0X01	5/16	1/8	0 to 2	SA	62	150	No	48
1-1/8"	DM-112	5/16	1/8	Any	DA	100	250	1,000*	26-27
	C-112	5/16	1/4-28 or 1/8	Any	DA	100	250	250	44-45
1-1/2"	SS-112	1/2	10-32	to 3	DA	100	150	No	47
	DM1-150	5/8	1/4	Any	DA	177	250	1,000	28-33
	DM2-150	5/8	1/4	Any	DA	177	250	1,000	28-33
	HD1-150	5/8 or 1	1/4	Any	DA	177	250	1,000	34-41
	C-150	1/2	1/4	Any	DA	177	150	250	44-45
2"	SS-150	1/2	10-32	to 3	DA	177	150	No	47
	DM1-200	5/8	1/4	Any	DA	314	250	1,000	28-33
	DM2-200	5/8	1/4	Any	DA	314	250	1,000	28-33
	HD1-200	5/8 or 1	1/4	Any	DA	314	250	1,000	34-41
	C-200	5/8	1/4	Any	DA	314	150	250	44-45
2-1/4"	SS-200	5/8	1/8	to 3	DA	314	150	No	47
	H-41	1/2	1/8	1	SA	316	150	No	48
	H-42	1/2	1/8	2	SA	353	150	No	48
2-1/2"	H-43	1/2	1/8	3	SA	351	150	No	48
	DM1-250	5/8	1/4	Any	DA	491	250	1,000	28-33
	DM2-250	5/8	1/4	Any	DA	491	250	1,000	28-33
3"	HD1-250	5/8 or 1	1/4	Any	DA	491	250	1,000	34-41
	C-250	3/4	1/4	Any	DA	491	150	250	44-45
	SS-250	5/8	1/8	to 3	DA	491	150	No	47
	C-300	1	1/4	Any	DA	707	150	250	44-45
3-1/4"	SS-300	3/4	1/8	to 3	DA	707	150	No	47
	H-71, -72, -73	3/4	1/4	1, 2, 3	SA	682	150	No	48
	DM1-325	1	1/2	Any	DA	829	250	700	28-33
4"	DM2-325	1	1/2	Any	DA	829	250	700	28-33
	HD1-325	1 or 1-3/8	1/2	Any	DA	829	250	700	34-41
	DM1-400	1	1/2	Any	DA	1,257	250	650	28-33
5"	DM2-400	1	1/2	Any	DA	1,257	250	650	28-33
	HD1-400	1 or 1-3/8	1/2	Any	DA	1,257	250	650	34-41
	SS-400	3/4	1/8	to 3	DA	1,257	150	No	47
6"	H-122	3/4	3/8	2 5/8	SA	1,204	150	No	48
	HD-500	1 or 1-3/8	1/2	Any	DA	1,964	250	900	42-43
	DM-600	1 3/8	3/4	Any	DA	2,827	250	435	28-33
8"	HD-600	1-3/8 or 1-3/4	3/4	Any	DA	2,827	250	435	42-43
	H-283	1-1/4	1/2	3	SA	2,763	150	No	48
10"	HD-800	1-3/8 or 1-3/4	3/4	Any	DA	5,027	200	500	42-43
12"	HD-1000	1-3/4 or 2	1	Any	DA	7,854	200	400	42-43
	HD-1200	2 or 2-1/2	1	Any	DA	11,310	200	400	42-43

*Specify "FOR HY USE" when ordering

Available Mounting Styles



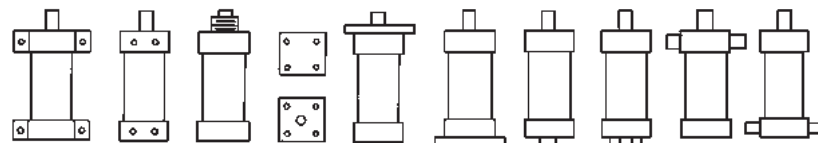


Foot Bottom Flush Nose Frt/Rear Flush Front Flange Rear Flange Pivot Clevis Front Trunnion Rear Trunnion

Valve Finder

	Actuator	Model Number	Port Size	Flow (C.)	Return Flow	Flow Pattern	See Page
Mechanically Actuated	Straight Plunger	MV-5	1/8	0.11	Spring	3-Way	22-23
		MV-45	1/8	0.11	Spring	3-Way	22-23
		LTV-5	1/8	0.18	Int. Air	4-Way	20-21
		LTV-45	1/8	0.18	Int. Air	4-Way	20-21
		FC-51	1/8	0.81	Spring	3-Way	25
		3C-1	1/4	0.48	Spring	3-Way	25
		FC-101	3/8	1.15	Spring	3-Way	24
	Straight Leaf	MV-10	1/8	0.11	Spring	3-Way	22-23
		MV-70	1/8	0.11	Spring	3-Way	22-23
		LTV-10	1/8	0.18	Int. Air	4-Way	20-21
	Roller	MV-15	1/8	0.11	Spring	3-Way	22-23
		MV-90	1/8	0.11	Spring	3-Way	22-23
		MV-25, MV-30	1/8	0.11	Spring	3-Way	22-23
		MV-75	1/8	0.11	Spring	3-Way	22-23
		LTV-15	1/8	0.18	Int. Air	4-Way	20-21
		LTV-25, LTV-30	1/8	0.18	Int. Air	4-Way	20-21
		LTV-75	1/8	0.18	Int. Air	4-Way	20-21
	One-Way Roller	MV-20	1/8	0.11	Spring	3-Way	22-23
		MV-80	1/8	0.11	Spring	3-Way	22-23
		LTV-20	1/8	0.18	Int. Air	4-Way	20-21
		LTV-80	1/8	0.18	Int. Air	4-Way	20-21
	Extended Rod	MV-85	1/8	0.11	Spring	3-Way	22-23
		LTV-85	1/8	0.18	Int. Air	4-Way	20-21
	Ball	MV-40	1/8	0.11	Spring	3-Way	22-23
		LTV-40	1/8	0.18	Int. Air	4-Way	20-21
Hand (Manually) Actuated	Fingertip Lever	MV-50	1/8	0.11	Spring	3-Way	22-23
		LTV-50	1/8	0.18	Int. Air	4-Way	20-21
		N2-HL	1/4	1.00	Spring	4-Way	14-15
		FT-101	3/8	1.15	Spring	3-Way	24
		FT-4	1/8	0.16	Spring	4-Way	24
	Low Stress	LTV-PBG(F)	1/8	0.18	Int. Air	3- or 4-Way	19
	Straight Lever	C2-7	1/4	0.75	Spring	4-Way	16-17
		C5-7	1/2	3.17	Spring	4-Way	16-17
		C2-8	1/4	0.75	Hand	4-Way	16-17
		C5-8	1/2	3.17	Hand	4-Way	16-17
		4B-1	1/4	0.48	Hand	4-Way	25
	Push Button & Palm	MV-140	1/8	0.11	Spring	3-Way	22-23
		LTV-125	1/8	0.18	Int. Air	4-Way	20-21
		LTV-140	1/8	0.18	Int. Air	4-Way	20-21
		PC-51	1/8	0.81	Spring	3-Way	25
		MV-MH	1/8	0.11	Spring	3-Way	22-23
		LTV-MH	1/8	0.18	Int. Air	4-Way	20-21
		MV-EH & MV-FH	1/8	0.11	Spring	3-Way	22-23
		LTV-EH & LTV-FH	1/8	0.18	Int. Air	4-Way	20-21
		MV-ES	1/8	0.11	Spring	3-Way	22-23
		MV-EMS	1/8	0.18	Detent	3-Way	22-23
		LTV-ES	1/8	0.18	Int. Air	4-Way	20-21
	Double Button	N2-PB	1/4	1.00	Button	4-Way	14-15
	Knob (Push-Pull)	LTV-130	1/8	0.18	Knob	4-Way	20-21
		PC-51A	1/8	0.81	Knob	3-Way	25
		ACV-16	5/32	0.053	Knob	4-Way	55
		ACV-25	1/4	0.12	Knob	4-Way	55
	Flip Toggle	MV-35	1/8	0.11	Toggle	3-Way	22-23
		LTV-35	1/8	0.18	Toggle	4-Way	20-21
	Twist (2 Pos.)	MV-TP	1/8	0.11	Twist	3-Way	22-23
		LTV-TP	1/8	0.18	Twist	4-Way	20-21

	Actuator	Model Number	Port Size	Flow (C _v)	Return Flow	Flow Pattern	See Page
Electrically Actuated	Single Solenoid	LTV-115DD	1/8	0.18	Int. Air	4-Way	20-21
		N2-SCD	1/4	1.00	Spring	4-Way	14-15
		C2-4DCD	1/4	0.75	Spring	4-Way	16-17
		C5-4DCD	1/2	3.17	Spring	4-Way	16-17
		V1 (Isonic)	5/32 Tube	0.02	Spring	3-Way	4-6
		V2 (Isonic)	1/4 Tube	0.01, 0.02, 0.05	Spring or Ext. Air	3-Way	7-9
		V4 (Isonic)	1/4 Tube	0.8	Spring	4-Way	10-13
		MB12-3CSC	1/8	0.035	Spring	3-Way	52
		MB12-3USC	1/8	0.035	Spring	3-Way	52
		MC25-3CSC	1/4	0.035	Spring	3-Way	52
		MB12-3USC	1/4	0.035	Spring	3-Way	52
		MB12-2CSC	1/8	0.035	Spring	2-Way	52
		MC25-2CSC	1/4	0.035	Spring	2-Way	52
	Double Solenoid	LTV-120DD	1/8	0.18	Solenoid	4-Way	20-21
		N2-DCD	1/4	1.00	Solenoid	4-Way	14-15
		C2-5DCD	1/4	0.75	Solenoid	4-Way	16-17
		C5-5DCD	1/2	3.17	Solenoid	4-Way	16-17
		C2-6HDCD	1/4	0.75	Solenoid	4-Way	16-17
		C2-6RDCD	1/4	0.75	Solenoid	4-Way	16-17
Air Actuated	Single Pressure	LTV-60	1/8	0.18	Int. Air	4-Way	20-21
		LTV-60L	1/8	0.18	Int. Air	4-Way	20-21
		L-10	1/8	0.11	Int. Air	4-Way	18
		K-10	1/8	0.18	Int. Air	4-Way	18
		N2-SP	1/4	1.00	Spring	4-Way	14-15
		V4 (Isonic)	1/4 Tube	0.80	Spring	4-Way	10-13
		W-10	1/4	0.63	Int. Air	4-Way	18
		C2-3	1/4	0.75	Spring	4-Way	16-17
		C5-3	1/2	3.17	Spring	4-Way	16-17
		MV-60	1/8	0.11	Spring	3-Way	22-23
		MPE-BZ	1/8	-	Spring	Spec.	54
		MPE-BZE	1/8	-	Spring	Spec.	54
	Double Pressure	LTV-110	1/8	0.18	Ext. Air	4-Way	20-21
		N-10	1/8	0.11	Ext. Air	4-Way	18
		M-10	1/8	0.18	Ext. Air	4-Way	18
		N2-DP	1/4	1.00	Ext. Air	4-Way	14-15
		V4 (Isonic)	1/4 Tube	0.80	Ext. Air	4-Way	10-13
		X-10	1/4	0.63	Ext. Air	4-Way	18
		C2-1	1/4	0.75	Ext. Air	4-Way	16-17
		C5-1	1/2	3.17	Ext. Air	4-Way	16-17
	Single Bleed	T-10	1/8	0.11	Int. Air	4-Way	18
		O-10	1/8	0.18	Int. Air	4-Way	18
		Y-10	1/4	0.63	Int. Air	4-Way	18
		404A	1/8	-	Spring	2-Way	18
		405A	Spec.	-	Spring	2-Way	18
	Double Bleed	V-10	1/8	0.11	Ext. Bleed	4-Way	18
		U-10	1/8	0.18	Ext. Bleed	4-Way	18
		Z-10	1/4	0.63	Ext. Bleed	4-Way	18
		N2-DB	1/4	1.00	Ext. Bleed	4-Way	14-15
Foot Actuated	Pedal	2060400	1/4	0.11	Spring	3-Way	23
		N2-F4	1/4	1.00	Spring	4-Way	14-15
	Foot Treadle	4W-1	1/4	0.48	Foot	4-Way	25
		201	3/8	1.15	Foot	3-Way	24

V1000 Series
2 & 3 wayV2000 Series
2 & 3 wayV4000 Series
4 way

The Award-Winning “Half-Shell” Design

The heart of the Isonic® concept is its patented “half-shell” design. Composed of two mirror-image halves, Isonic® allows its flow channels and internal component compartments to be designed directly into these molded body sections. Valve bodies are molded of high-strength, glass-impregnated Ultem thermoplastic.

Assembly is achieved by simply inserting the various valve elements into their corresponding “half-shell” pockets. Internal components are easily positioned to make optimal use of space.

The valve is completed by ultrasonically welding the two valve segments, creating a strong bond and hermetic seal. This design totally eliminates the need for fasteners, adhesives, gaskets and inserts.

Revolutionary Valve Production

Isonic® technology eliminates all machining operations associated with valve manufacturing. Requiring only simple assembly, Isonic® can be produced quickly and easily with significant cost reduction.

Design Optimizes Valve Performance

Isonic® 2, 3 and 4-way valves feature a unique, multi-patented design that significantly shrinks valve size while boosting flow capacity. With its design and a state-of-the-art manufacturing process, Isonic® breaks through the restriction and limitations of conventional valve manufacturing.

Loaded with Standard Features

Along with its size and price advantages, Isonic® offers numerous user features, many of them standard. Most models feature an integral electronic board with surge suppression and LED. A variety of voltages and wiring options are available. This combination of price and versatility makes Isonic® the perfect control choice for pneumatic systems.

Faster Manifold Connections

The Isonic® manifold system has been designed to virtually eliminate downtime, eliminating all end plates, screws, o-rings and gaskets customarily found in manifold systems. Connecting any valve to the manifold base is as easy as plugging in an electrical cord. With this patented “plug-in” design, replacing an individual valve can be accomplished in seconds, without the aid of any tools!

Available in two, three, four or five station segments, the Isonic® manifold's unique modular design creates a versatile, expandable control base. For larger manifolds, two or more segments can be easily combined to fulfill any needs. Further, manifold segments are easily isolated for applications with differential pressures.

Quick-Connect Collets - No Fittings Needed

With its unique design Isonic® eliminates the need for tube fittings. Built-in, push-to-connect collets allow for fast and easy tube and manifold connections.

Resistant To Harsh Conditions

Molded from a high performance thermoplastic, Isonic® achieves superior heat, impact and chemical resistance. It is listed with both UL and CSA.

Maximum Air Flow

Instead of the angular passages of most conventional valves, Isonic's internal channels are aerodynamically shaped for maximum air flow and minimal internal friction. Eliminating sharp corners and abrupt changes in direction reduces air turbulence and energy loss. Normally round air passages are replaced by thin, deep, tape-like channels that conserve space and optimize air flow.



Isonic® V1 and V4 have earned UL recognition and have been tested to the standards of CSA and conforms to the applicable directives of the European Union.



Isonic® is a registered trademark of Mead Fluid Dynamics, Inc.

Isonic® V1000 Series (2 and 3-Way)

Specifications	
Design:	Poppet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 Micron
Cycle Life:	50,000,000 cycles
Orifice Size:	A: 0.025" / 0.65mm B: 0.035" / 0.90mm C: 0.055" / 1.4mm
Flow:	A: 0.01 C _v B: 0.02 C _v C: 0.05 C _v
Maximum Pressure:	A: 120 PSI / 8.3 Bar B: 120 PSI / 8.3 Bar C: 30 PSI / 2.1 Bar
Vacuum:	to 28 in. Hg
Temperature Range:	0° F to 120° F (-18° C to 49° C)
Tubing:	5/32" or 4mm
Mounting Holes:	0.156 diameter (1 hole, 1 slot)
Seals:	Viton® and Nitrile
Weight:	1.5 oz. (per valve)

Solenoid Data

Voltage	12DC	24DC	24AC	120AC
Amps	0.133	0.058	0.058	0.014
Resistance	92Ω	406Ω	406Ω	8350Ω
Initial Power	1.6	1.4	1.4	1.7
Continuous On	1.3	1.2	1.2	1.5


Response Time: 10 milliseconds

Molex Connector: UL and CSA Listed
Din Connector: Protection Class- IP 65 according to DIN 40 050
Insulation Class- Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications

Manifold

Common Air Inlet: Built-in, push-in fittings for 1/4" OD or 6mm tubing both ends
Foot Mounting: 4 slots, 11/16" diameter
DIN Rail Mounting: Attaches to 15mm DIN rail

Valve Symbols:




2/2 NC




3/2 NC

Dimensions

Valves:

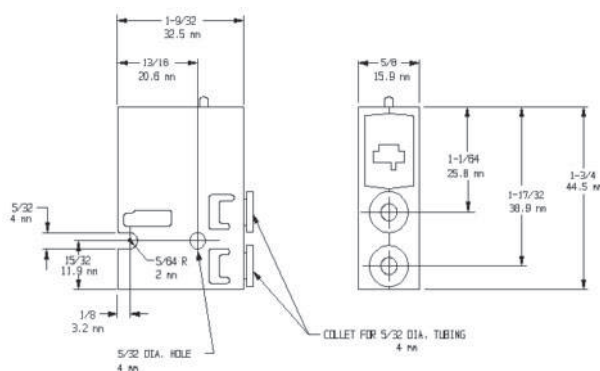

Manifolds:

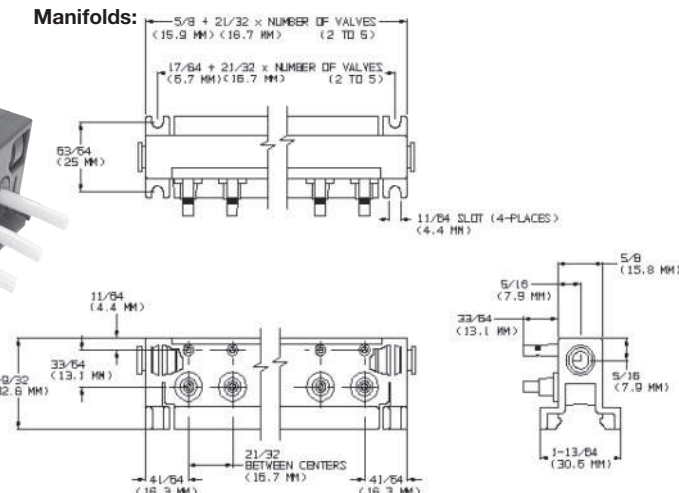

Accessories



P1SA1




P1SA2



P1Q1

NOTE: One (1) pc. is included with each "W" type valve. 24 AWG wire.

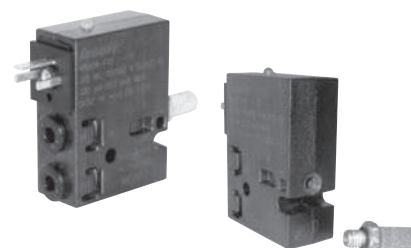

MM-019

Muffler shown here on V1 Valve with T1 option

How To Order:

Valves:

V 1 B 04 - A W 1 - ()**

Product Category

V = Valve

Family

1 = Isonic® 1000 (2-way, 3-way)

Orifice Size

A = 0.025" (0.6mm)

B = 0.035" (0.9mm)

C = 0.055" (1.2mm)

Flow Pattern

02 = 2-Way Normally Closed

04 = 3-Way Normally Closed

05 = Vacuum (3-Way) Normally Closed

06 = Vacuum (2-Way) Normally Closed

Options

T1 = Tapped Exhaust (10-32)

T2 = Tapped Exhaust (M5x0.80)

LED

0 = No LED

1 = LED (not available with connector Z)

Connector

W = Mini Quick Connect

X = 8mm Micro DIN

(connector not included)

Y = Flying Lead

Z = Flying Lead (without LED and Circuit Protection - DC only)

Solenoid Voltage

A = 12 DC

B = 24 DC

D = 24 50/60 Hz AC

F = 120 50/60 Hz AC

Manifolds:

M 1 04 - J 0 - ()**

Product Category

M = Manifold

Family

1 = Isonic® 1000 (2-Way; 3-Way)

Number of Stations

02 = 2 Stations

03 = 3 Stations

04 = 4 Stations

05 = 5 Stations

N = N Stations (modular segments are combined for manifolds over 5 stations)

Options

A = Aluminum Manifold

Manifold Assembly

0 = Manifold Only

2 = Assembled Manifold on DIN rail

Common Air Inlet (Both Ends)

J = Push-in fitting for 1/4" OD tubing

K = Push-in fitting for 6mm tubing

Accessories:

Electrical Connectors

8mm Micro DIN Connector P1D1

8mm Micro DIN Connector (molded, pre-wired) P1D2 (includes 39" / 1m leads)

Mini Quick-Connect P1Q1 (includes 18" / 45cm leads; contact factory for longer lengths)

Manifold Accessories

15mm DIN Mounting Rail P1M1-x (where x = desired number of feet of DIN Rail)

15mm DIN Rail End Stops P1S1 (NOTE: two required per Manifold)

4 mm (5/32") Manifold Blocking Plug P1B1 (for blocking empty Manifold stations)

1/4" Manifold Inlet Port Plug P1P1 (one included with each manifold)

6mm Manifold Inlet Port Plug P1P2 (one included with each manifold)

Miscellaneous





10-32 Muffler MM-019 (to silence exhaust in 10-32 exhaust port)

Port Adapter P1SA1 (converts 5/32" port to 1/4" barb OD tube)

Port Adapter P1SA2 (converts 5/32" port to 1/4" push-to-connect OD tube)

See additional accessories on page 13.

Valves

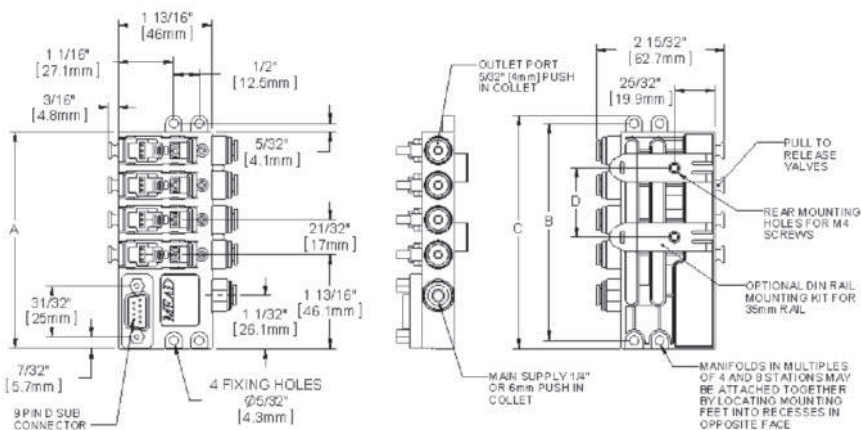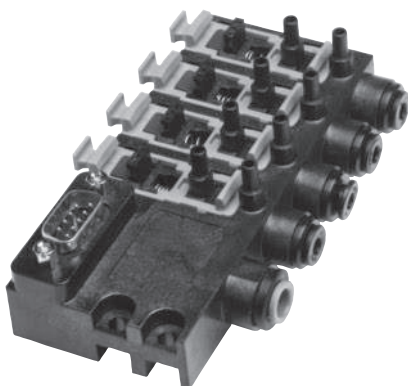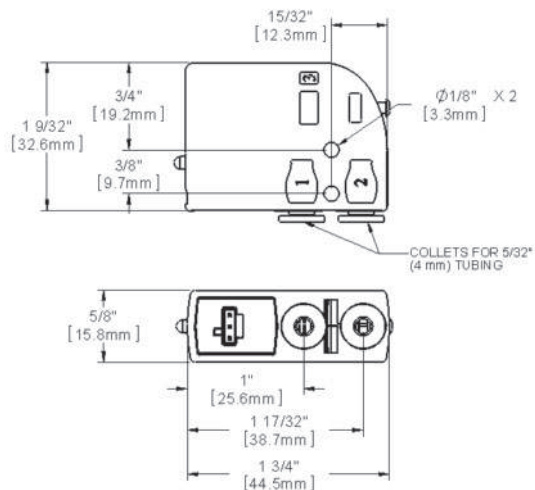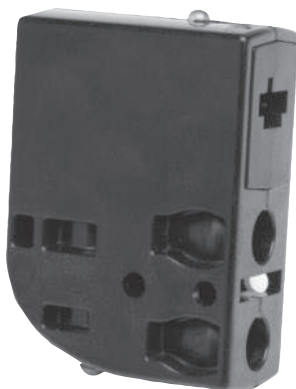


Manifold	A	B	C	D
4	4-3/16	4-3/16	4-1/2	1-11/32
Station	[106.3]	[106.3]	[114.3]	[34]
8	6-7/8	6-7/8	7-13/32	4-1/32
Station	[174.3]	[174.3]	[188.3]	[102]


Note: Dimensions in inches [mm]

First numbers are the pin numbers. Center information refers to station. Colors are the wire color of Mead accessories.

9-Pin Sub-D Connector
(4 Station Manifold Only)



9-Pin Sub-D Connector
(8 Station Manifold Only)

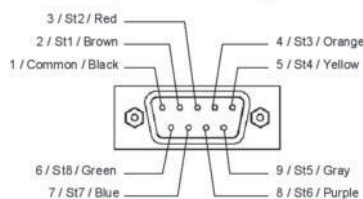

Specifications - Normally Closed Version

Design:	Direct Acting
Media:	Air or Inert Gas
Lubrication:	None required
Filtration:	40 micron
Cycle Life*:	50,000,000 cycles
Orifice Size:	A: 0.025" / .65mm B: 0.035" / .90mm C: 0.055" / 1.40mm

Flow:	A: 0.01 C _v B: 0.02 C _v C: 0.05 C _v (Standard Power only)
-------	--

Maximum Pressure:	Standard Power: A: 120 PSI / 8.3 Bar B: 120 PSI / 8.3 Bar C: 30 PSI / 2.1 Bar Low Power: A: 45 PSI / 3 Bar B: 45 PSI / 3 Bar
-------------------	--

Vacuum:	To 28 in Hg
---------	-------------

Temperature Range:	0° F to 120° F (-18° C to 49° C)
--------------------	----------------------------------

Tubing:	5/32" or 4mm
---------	--------------

Mounting Holes	0.156" diameter (2 holes)
----------------	---------------------------

Seals:	Viton® and Nitrile
--------	--------------------

Weight:	1.5 oz. (per valve)
---------	---------------------

Specifications - Normally Open Version

Design:	Direct Acting
Media:	Air or Inert Gas

Lubrication:	None Required
--------------	---------------

Filtration:	40 micron
-------------	-----------

Cycle Life*:	Standard Power: 10,000,000 cycles Low Power: 50,000,000 cycles
--------------	---

Orifice Size:	B: 0.035" / 0.90mm C: 0.055" / 1.40mm (Standard Power only)
---------------	--

Flow:	B: 0.02 C _v C: 0.05 C _v
-------	--

Maximum Pressure:	Standard Power B: 90 PSI / 6.2 Bar C: 25 PSI / 1.6 Bar Low Power B: 37 PSI / 2.5 Bar
-------------------	--

Vacuum:	To 28 in. Hg
---------	--------------

Temperature Range:	0° F to 120° F (-18° C to 49° C)
--------------------	----------------------------------

Tubing:	5/32" or 4mm
---------	--------------

Mounting Holes:	0.156" diameter (2 holes)
-----------------	---------------------------

Seals:	Viton® or Nitrile
--------	-------------------

Weight:	1.5 oz. (per valve)
---------	---------------------

Solenoid Data

Voltage	12DC	24DC	24AC	120AC
Amps	0.133	0.058	0.058	0.014
Resistance	92Ω	406Ω	406Ω	8350Ω
Initial Power	1.6W	1.4W	1.4W	1.7W
Continuous On	1.3W	1.2W	1.2W	1.5W

Response Time: 10 milliseconds

Molex Connector: UL and CSA Listed

DIN Connector: Protection Class: IP 65 according to DIN 40 050
Insulation Class: Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications


Manifold

Common Air Inlet: Built-in, push-in fittings for 1/4" OD or 6mm tubing

Rear Mounting: 2 Holes for M4 screws

DIN Rail Mounting: Attaches to 35mm DIN Rail

Accessories



P2B1



P4M1-x



P5-09SCD



P1SA1



P1SA2




P1Q1

NOTE: One (1) pc. is included with each "W" type valve. 24 AWG wire




P4S1


Valve Symbols



2/2 NC



3/2 NC



3/2 NO

Isonic® V2000 Series (2 and 3-Way)

How To Order

Valves:

V 2 B 04 - B W 1 - L - T1

Product Category

V = Valve

Family

2 = Isonic® 2000

Orifice Size

A = 0.025" (0.6mm) (only available on Normally Closed)

B = 0.035" (0.9mm)

C = 0.055" (1.4mm) (not available with Low Power Option)

Flow Pattern

02 = 2-Way Normally Closed

03 = 3-Way Normally Open

04 = 3-Way Normally Closed

05 = Vacuum (3-Way) Normally Closed

06 = Vacuum (2-Way) Normally Closed

07 = Vacuum (3-Way) Normally Open

Options

L = Low Power (only available with connector Z)
(check chart for voltage options)

T1 = Tapped Exhaust (10-32)

T2 = Tapped Exhaust (M5x0.80)

LED

0 = No LED (only available with connector Z)

1 = LED standard (not available with connector Z)

Connector

W = Mini Quick Connect

Required for Manifold

X = 8mm Micro DIN

(connector not included)

Y = Flying Lead

Z = Flying Lead (without LED and Circuit
Protection - DC only)Solenoid Voltage (See Option Combination
Availability chart below)

A = 12 VDC

B = 24 VDC

D = 24 50/60 Hz VAC

F = 120 50/60 Hz AC

R = 5 VDC

M = 3 VDC

Manifolds:

M 2 B 08 - 1 1

Product Category

M = Manifold

Family

2 = Isonic® 2000

Inlet Tube Size

A = 1/4" OD Tube Collets

B = 6mm OD Tube Collets

Options

0 = No cable or connector

5 = With 5.0m cable and connector

Manifold Accessories

0 = Manifold only

1 = DIN Rail clips mounted on manifold

2 = Manifold mounted on DIN rail

Number of Stations

04 = 4 Station

08 = 8 Station

NOTE: Outlet tube size is 5/32" (4mm) OD Tube Collet

Accessories:

Electrical Connectors

8mm Micro DIN Connector P1D1

8mm Micro DIN Connector (molded, pre-wired) P1D2 (includes 39" / 1m leads)

Mini Quick-Connect P1Q1 (includes 18" / 45cm leads; contact factory for longer lengths)

Manifold Accessories

35mm DIN Mounting Rail P4M1-x (where x = desired number of feet of DIN Rail)

35mm DIN Rail End Stops P4S1 (NOTE: two required per Manifold)

Manifold Blocking Plug P2B1 (for blocking empty Manifold stations)

5.0m Cable and 9 Pin Connector P5-09SDC

Miscellaneous


10-32 Muffler MM-019 (to silence exhaust in 10-32 exhaust port)

Port Adapter P1SA1 (converts 5/32" port to 1/4" barb OD tube)

Port Adapter P1SA2 (converts 5/32" port to 1/4" push-to-connect OD tube)

Option Combination Availability

Voltage	Standard Power 1.5W, 8 Bar	Low Power (L option) 0.5W, 3 Bar
3 VDC		•
5 VDC		•
12 VDC	•	•
24 VDC	•	•
24 VAC	•	
120 VAC	•	

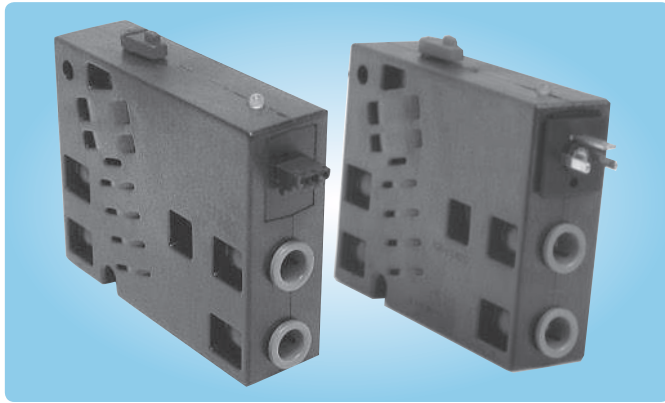

Isonic® Control Valves

While only 20mm in width, these 2 position spool valves provide a surprisingly high flow ($C_v = 0.8$). With its thin, aerodynamic flow passages, Isonic® maintains a higher flow in a smaller area. The pilot piston features an innovative oval design to further facilitate a compact, low-profile power valve.

Versatile Mounting

With a hole and a slot molded into its body, Isonic® valves may be mounted flush to any flat surface. Mounting brackets are also available for individual surface or DIN rail mounting.

Solenoid Data

Voltage	Amps	Resistance	Initial Power	Continuous On
12DC	0.133	92	1.6	1.3
24DC	0.058	406	1.4	1.2
24AC	0.058	406	1.4	1.2
120AC	0.014	8350	1.7	1.5

Specifications	
Design:	Spool (2-Position)
Ports:	1/4" OD tube collet or 6mm OD tube collet
Pilot Ports:	5/32" (4mm) OD tube collet
Media:	Air or Inert Gas
Lubrication:	None Required
Filtration:	40 Micron
Cycle Life:	20,000,000 (minimum)
Orifice Size:	0.2" (5.0mm)
Flow:	0.8 C_v
Vacuum:	Air pilot models can be used in vacuum applications with external air signal to pilot ports.
Minimum Pressure:	30 PSI (2 Bar)
Maximum Pressure:	120 PSI (8.3 Bar)
Temperature Range:	0° F to 120° F (-18° C to 49° C)
Mounting Holes:	0.177" (4.5mm) diameter (1 hole, 1 slot)
Weight:	Solenoid models: 3.1 oz each Air Pilot models: 2.1 oz each

Materials

Body GE thermoplastic
Seals Fluorocarbon and Nitrile

Electrical


Voltages DC: 12, 24
..... AC: 24, 110/120
Leads 18" standard - 24 AWG wire
Duty Cycle Continuous duty
Response Time 16 milliseconds @ 100 PSI
Manual Override Standard (solenoid models)




DIN Connector: Protection Class- IP 65 according to DIN 40 050
Insulation Class- Group C according to VDE 0110
Conform to DIN 43650 Form C Specifications

Pressure Piloted Models


Dimensions

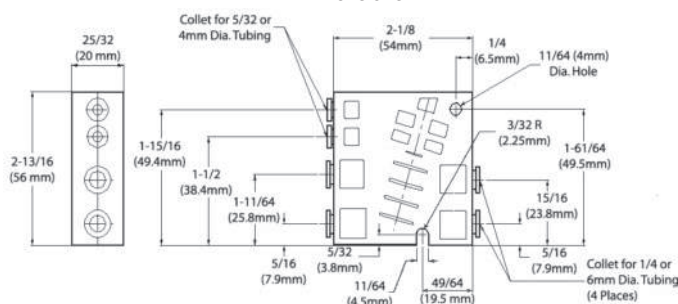

Function



Symbol




* Arrow Indicates Pressure applied to Pilot Port


1.....Air Supply 2.....Cylinder
3.....Common Exhaust 4.....Cylinder

Solenoid Models

Dimensions

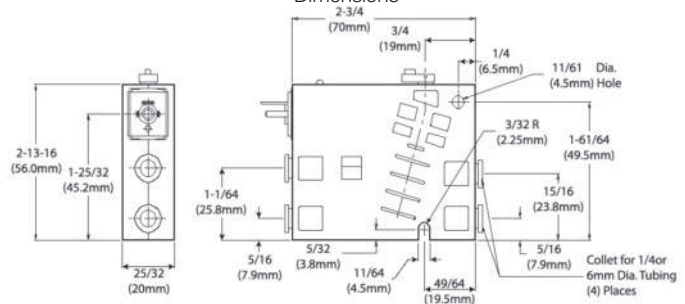

Function



Symbol



Unactuated

4/2 Single Solenoid

Actuated

1.....Air Supply 2.....Cylinder
3.....Common Exhaust 4.....Cylinder

Isonic® V4000 Series (4-Way)


The Quick-Change Manifold

The Isonic® manifold system has been designed to virtually eliminate downtime. Connecting any valve to the manifold base is as easy as plugging in an electrical cord. With this patented "plug-in" design, replacing an individual valve on the manifold can be accomplished in a matter of seconds!

Mounting Options

The Isonic® manifold can be either foot mounted or DIN rail mounted. 35mm DIN rail can be ordered from Mead.

V4 Manifold Dimensions

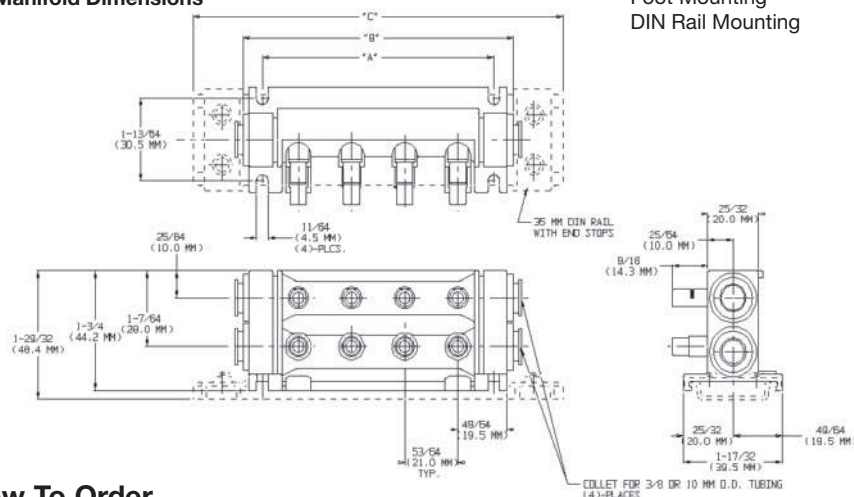

How To Order

Valves:

Product Category

V = Valve

Family

4 = Isonic 4000 (4-way)

Collet Size

A = 1/4" O.D. Tube Collet

B = 6mm O.D. Tube Collet

Actuator Type

0507 = Single Air Pilot, Spring Return

0505 = Double Air Pilot

0307 = Single Solenoid, Spring Return

V 4 A- 0307 - A W 1 - (**)

Options

V = Pilot Breather Vent Filter

LED

0 = (only available with connector Z)

1 = LED (not available with connector Z)

Connector

0 = None (pressure models)

W = Mini Quick Connect

X = 8mm Micro DIN Connector

Y = Flying Lead

Z = Flying Lead (without LED and Circuit Protection - DC only)

Solenoid Voltage

0 = None (pressure models)

A = 12 DC

B = 24 DC

D = 24 50/60 Hz AC

F = 110 / 120 50/60 Hz AC

Manifold:

Product Category

M = Manifold

Family

4 = Isonic 4000 (4-way)

Collet Size

A = 3/8" O.D. Tube Collets (Common Air Inlet)

B = 10mm O.D. Tube Collets (Common Air Inlet)

Number of Stations

02 = 2 Stations

03 = 3 Stations

04 = 4 Stations

N = N Stations

(modular segments are combined for manifolds over 4 stations)

M 4 A 03 - 2 Y

Wiring Options

N = None

Y = Pre-wired 10-pin ribbon connector* (wiring cover included)

C = Manifold with wiring cover

* Compatible with mini quick connect valves only.

Manifold Assembly

0 = Manifold Only

2 = Manifold Mounted on DIN rail (required for 5 or more stations)

Isonic® Manifold Expands With Your Needs

Available in two, three or four station segments, the manifold's unique modular design creates a versatile, expandable control base. For manifolds larger than four stations, two or more segments can be easily combined to create any size manifold (multiple segments are assembled on DIN rail and secured with end stops). Manifold segments are easily isolated for applications with differential pressures.

Manifold Specifications

Common Air Inlet


Foot Mounting

DIN Rail Mounting

Both ends: built in collets for 3/8" OD (or 10mm) tubing
0.177 (4.5 mm) diameter
Attaches to 35 mm DIN rail

Stations	"A"	"B"	"C"
2	1-61/64 (49.5 mm)	2-35/64 (64.7 mm)	4-9/64 (105 mm)
3	2-25/32 (70.5 mm)	3-3/8 (85.6 mm)	4-15/16 (125 mm)
4	3-39/64 (91.5 mm)	4-13/64 (106.7 mm)	5-49/64 (146 mm)
5	5-9/64 (130.5 mm)	5-57/64 (149.6 mm)	7-19/64 (185 mm)
6	5-31/32 (151.5 mm)	6-9/16 (166.7 mm)	8-1/8 (206 mm)
7	6-51/64 (172.5 mm)	7-25/64 (187.7 mm)	8-61/64 (227 mm)
8	7-5/8 (193.5 mm)	8-7/32 (208.7 mm)	9-25/32 (248 mm)

NEW!

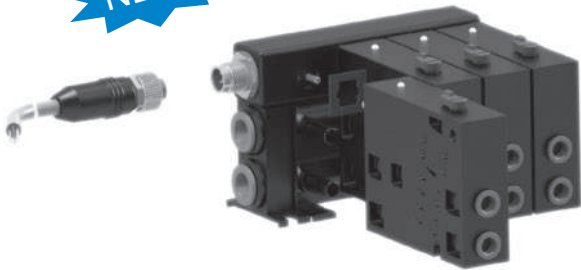

Simple, Cost Effective Manifold Wiring

Mead's Manifold PowerStrip™ (MPS) offers a simple solution to wiring manifold valve stacks. The MPS reduces installation time, simplifies troubleshooting, and provides a clean, space-efficient alternative to individual wiring and costly molded cable sets.

Features and Benefits

- Simplify Wiring
 - Eliminates bundled wire sets with a single home-run cable
- Reliable Design
 - IP65 ingress protection
 - Ultrasonic-welded construction
 - Non-metallic, corrosion resistant
- Cost Effective
 - Reduce installation time
 - Replaces individually wired DIN connectors and molded cable sets

Valve Compatibility		
Valve Series	Manifold	Manifold PowerStrip™
V4_-0307-_X1_-	M4_-_-N	MPS5-_-

Product Contents

Model	Includes
MPS5_-	Manifold PowerStrip™, Screws, Gaskets
MPS5_-C10	Manifold PowerStrip™, Screws, Gaskets, 10m M12 Cable

Specifications	
Compatibility:	Isonic® V4000 Series
Voltage Range:	0-120 VAC/VDC
Temperature Range:	0° F to 120° F Ambient (-18° C to 49° C)
Maximum Coil Power:	2W
Electrical Connection:	5-Pin M12 Male
Enclosure Rating:	IP65
Body Material:	ABS

How to Order

MPS 5 - 4 - C10

Model _____
5 - V4000 Series


Number of Stations _____
2 - Two (2) Stations
3 - Three (3) Stations
4 - Four (4) Stations

Optional Cable
Blank - None
C10 - 10M Mating Cable (MPS5)

Wiring Diagram




Dimensions - in [mm]

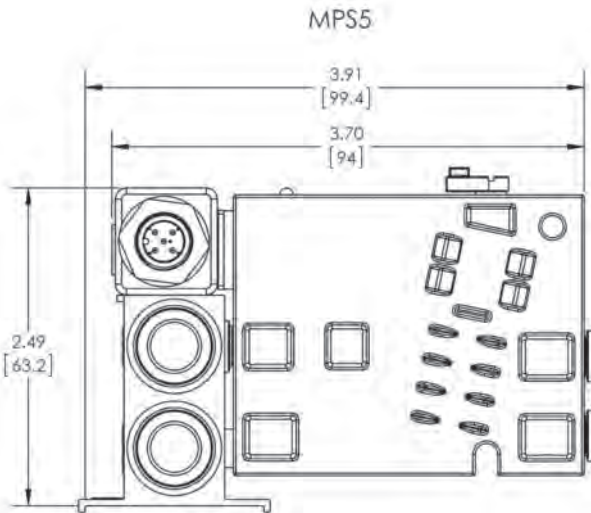

Accessories



10m M12 Cable
P/N: P10-5M12C

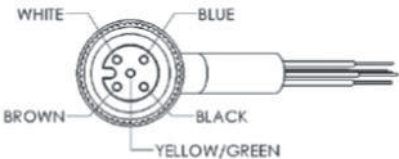

Accessories

Electrical Connectors

8mm Micro DIN Connector	P1D1
8mm Pre-wired DIN Connector (includes 39" leads)	P1D2
Mini Quick-Connect (includes 18" leads)	P1Q1
D-Sub Connector 9-Pin with 5 Meter Cable	P5-09SDC
D-Sub Connector 15-Pin with 1 Meter Cable	P1-15SDC
D-Sub Connector 15-Pin with 3 Meter Cable	P3-15SDC
D-Sub Connector 15-Pin with 5 Meter Cable	P5-15SDC



P5-09SDC



P1Q1

Mounting Brackets (For 4-Way Valves Only)

Single Valve Mounting Bracket	P4SM
Single Valve DIN Rail Mount	P4DM



P1SA1



P1SA2

Port Adapter (For 5/32" Ports)

Converts Port to Barb for 1/4" OD Tube	P1SA1
Converts Port to Push-in Fitting (1/4" OD Tube)	P1SA2

DIN Rail & Manifold End Stops


15mm DIN Rail for V1000 (x = # of feet required)	P1M1-x
35mm DIN Rail for V2000/V4000 (x = # of feet required)	P4M1-x
15mm Rail End Stop for V1000	P1S1
35mm Rail End Stop V2000/V4000	P4S1



P4S1



MMP-250



P2B1

Manifold Station Blocking Plugs & Port Plugs

5/32" (4mm) Station Plug (for empty manifold stations)	P1B1
Blanking Plug for V2000 Manifolds	P2B1
1/4" Station Plug (for empty manifold stations)	P4B1
6mm Station Plug (for empty manifold stations)	P4B2
1/4" Port Plug	P1P1
6mm Port Plug	P1P2
3/8" Port Plug	P4P1
10mm Port Plug	P4P2



P4C1 & P4CA



P4LC-4

Miscellaneous Accessories (for 4-Way Valves Only)


Valve Locking Clip (locks 2 valves in place)	P4LC-2
Valve Locking Clip (locks 3 valves in place)	P4LC-3
Valve Locking Clip (locks 4 valves in place)	P4LC-4
Manifold Valve ID Strip (50 #s per strip)	P4ID

Tube Collets (For Replacement Only)

For 5/32" (4mm) Port	P1C1
For 1/4" Port	P4C1
For 6mm Port	P4C2
For 3/8" Port	P4CA
For 10mm Port	P4CB



P4M1-x

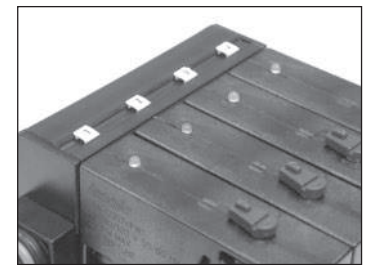



Valve Identifiers (P4ID)

Push-In Exhaust Mufflers


For 1/4" Port	MMP-250
For 6mm Port	MMP-006
For 3/8" Port	MMP-375
For 10mm Port	MMP-010
For 10-32 Port	MM-0019

Wiring Connector Dimensions


Mini Quick-Connect - 24 AWG wires

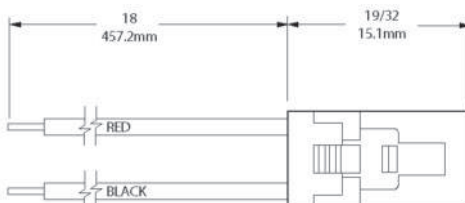


8mm DIN Connector



Single and Double Air Piloted

N1-SP
N2-SPN1-DP
N2-DP

Single and Double Solenoid

N1-SCD
N2-SCDN1-DCD
N2-DCDSolenoids shown here with
PVD1 (sold separately)

Designed For Long Life

Nova 4-way directional control valves offer state-of-the-art air valve design at a remarkably low price. Nova utilizes a single bonded rubber spool with finely ground sealing lands that travel only .047" ... less than 1/16th of an inch! This economy of movement assures long valve life yet generates enough flow to power a 4" bore cylinder.

Large Air Flow With Dual Exhausts

1/4" NPTF ported Nova valves produce a large output flow of 57 cubic feet per minute at 100 PSI inlet pressure ($C_v=1.0$). Each output port has its own exhaust port so that individual exhaust control is possible.

Manual Override as Standard

All Nova valves are supplied with manual overrides so that valve actuation may be triggered without electricity or air to the pilots.

External Pilot Option (E)

For solenoid actuation below the stated minimum pilot pressure or for vacuum applications, a 10-32 tapped external air supply allows the solenoid to be operated at different pressures than the power section.

Ordering Instructions


Single Valves: State model number and voltage, if applicable.

Stacked Valves: Add an "M" to the single valve model number and state voltage if applicable - specify number and type of valves in each stack. NOTE: Explosion-proof coils may not be stacked next to each other because of their greater size.

External Pilot Supply: Add an "E" to the model number.

Operating Parameters N1		Operating Parameters N2	
Media:	Air or Inert Gas	Media:	Air or Inert Gas
Pressure:	Vacuum to 120 PSI	Pressure:	Vacuum to 120 PSI
Port Size:	1/8" NPTF	Port Size:	1/4" NPTF
Pilot Ports:	1/8" NPSF	Pilot Ports:	1/8" NPSF
Flow:	$C_v = 0.7$ (single valves) $C_v = 0.9$ (stacked valves)	Flow:	$C_v = 1.0$ (single valves) $C_v = 1.2$ (stacked valves)
Temperature:	0° F to 120° F (-18° C to 49° C)	Temperature:	0° F to 120° F (-18° C to 49° C)
Lubrication:	Petroleum Base Oil	Lubrication:	Petroleum Base Oil
Filtration:	40 Micron Minimum	Filtration:	40 Micron Minimum
Sol Response:	30-40 ms	Sol Response:	30-40 ms
Seals:	Buna-N	Seals:	Buna-N

Ordering Example:

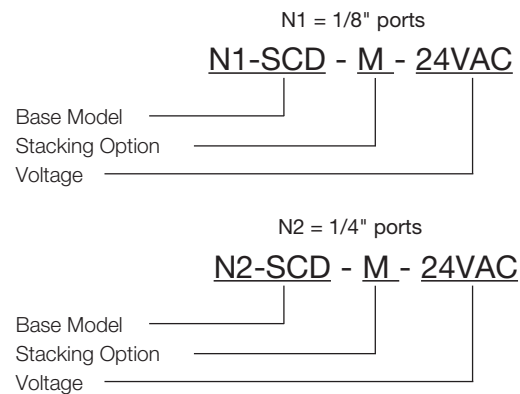


Nova Specifications

N1 Model	N2 Model	Actuator	Return	Description	Min. Pilot Pressure	Available Voltages		Wiring Type
						DC	AC	
N1-DP	N2-DP	Air Pilot	Air Pilot	Double Pressure Piloted	10 PSI	-	-	-
N1-SP	N2-SP	Air Pilot	Spring	Single Pressure Piloted	40 PSI	-	-	-
N1-DB	N2-DB	Bleed Pilot	Bleed Pilot	Double Bleed Piloted	40 PSI	-	-	-
N1-HL	N2-HL	Hand Lever	Spring	Light 3lb. Touch	-	-	-	-
N1-PB	N2-PB	Push Button	Push Button	Detent	40 PSI	-	-	-
N1-F4	N2-F4	Foot Pedal	Spring	Foot Valve w/ Cover	-	-	-	-
N1-SCD*	N2-SCD*	Solenoid	Spring	DIN Connector Solenoid	40 PSI	12-24	24-120-220-240	DIN*
N1-SX*	N2-SX	Solenoid	Spring	Explosion Proof	40 PSI	-	120	Conduit
N1-DCD*	N2-DCD*	Solenoid	Solenoid	DIN Connector Solenoids	10 PSI	12-24	24-120-220-240	DIN*
N1-DX	N2-DX	Solenoid	Solenoid	Explosion Proof	10 PSI	-	120	Conduit

* Connector not included on N2-SCD and N2-DCD. See "DIN Solenoid Connectors" on following page.

Double Push Button




N1-PB
N2-PB

Hand Lever




N1-HL
N2-HL

Foot Pedal



N1-F4
N2-F4

DIN Solenoid Connectors



A DIN connector (ordered separately) quickly attaches to the solenoid's prongs and is secured by a single screw.


Model PVD1




Mead offers three (3) types of 12mm industrial B-type DIN connectors to facilitate connections to the solenoid. Model PVD1 is a connector with a 1/2" conduit entry and no lead wires. Model PVD2 also has a 1/2" conduit entry but includes 20' of cabled lead wire. Model PVD3 is a strain relief connector that includes 72' of cabled wire. See page 62.

Dimensions


Basic Top View



Models N1 & N2
SCD, DP, SP, DB, and PB




N1-HL & N2-HL





Stacks

N1-SCD & N2-SCD
(with connector)



N2-F4

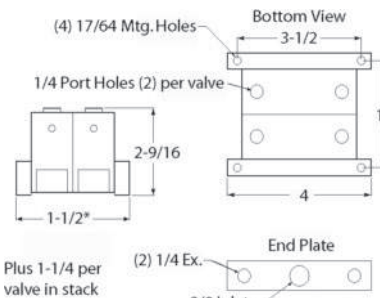


Stacking Options

If your application calls for the use of several valves, it is often advantageous to stack them. Because all valves within a stack are supplied air from a common source and are vented through common exhaust ports, plumbing time and fitting costs are greatly reduced.

Stacking also assures that your control valves are located centrally for more convenient troubleshooting and maintenance. Each stack valve body is attached only to its immediate neighbors so that valve additions, replacements, or deletions are easily achieved.

Flow Patterns




Single-actuated spring return models, including hand lever and foot pedal, have the inlet and Cyl. B ports connected when unactuated. On all double actuated models, except-PB and -DB, signals at P1 cause output at Cyl. A and signals at P2 cause output at Cyl. B. On -PB and -DB models, the reverse occurs.

Easy to Repair

Nova valves are designed to permit complete replacement of all wearing parts in seconds without touching the piping or electrical wiring. All you need are a pair of snap ring pliers and a replacement spool.

Valve Symbols

N1-DP & N2-DP



N1-SP & N2-SP




N1-DB & N2-DB



N1-HL & N2-HL



N2-F4



N1-PB & N2-PB






N1-SCD & N2-SCD
N1-SX & N2-SX



N1-DCD & N2-DCD
N1-DX & N2-DX

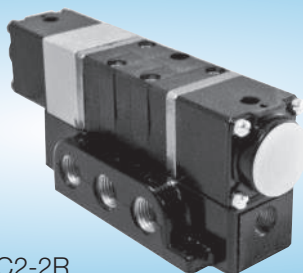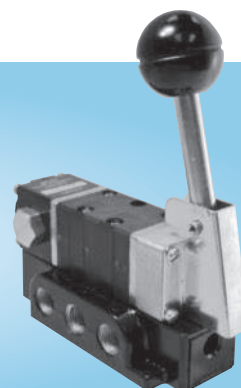

C2-3
Single Air PilotedC2-2R
3 Position, Double Air PilotedC2-10H
Hand Valve

Sub-Base Mounted

Mead's Capsula valves work long and hard even when subjected to dirty air. Their unique patented bi-lobed seals are wear-compensating, self-cleaning, and are completely retained to prevent extrusion.

All models are mounted on a side ported sub-base, 4-way, 5 port. Any valve module may be separated from its base in seconds without disturbing the piping.

Ordering Instructions

State model number and voltage.

C2-4DCD - 120AC

Base Model

Voltage

General Specifications

Flow:	1/4" Models - $C_v = 0.75$ (45 SCFM at 100 PSI) 1/2" Models - $C_v = 3.17$ (190 SCFM at 100 PSI)
Max. Air Pressure:	120 PSI
Pilot Ports:	1/8" NPT
Filtration:	40 Micron (extends valve life)
Lubrication:	Required for 1/2" and all 3-position models
Response:	30-40 ms
Temperature:	-20° F to 212° F (-29° C to 100° C)
1/4" Materials:	Module (ABS Cylolac) - Spool (Delrin AF®) Base (Die cast aluminum) - Dupont Company®
1/2" Materials:	Module (Phenolic) - Spool (Aluminum) Base (Rolled aluminum)

Model Number	Port Size	Actuator	Return	Description	Min. Pilot Pressure (PSI)	Available Voltages	
						DC	AC
C2-1	1/4	Air Pilot	Air Pilot	2-Position, Double Pressure Piloted	20	-	-
C5-1	1/2	Air Pilot	Air Pilot	2-Position, Double Pressure Piloted	20	-	-
C2-2H	1/4	Air Pilot	Spr. Center	3-Position, Double Pressure, Pressure Held in Center	45	-	-
C2-2R	1/4	Air Pilot	Spr. Center	3-Position, Double Pressure, Pressure Released	45	-	-
C2-3	1/4	Air Pilot	Spring	2-Position, Single Pressure Piloted	35	-	-
C5-3	1/2	Air Pilot	Spring	2-Position, Single Pressure Piloted	35	-	-
C2-4DCD*	1/4	Solenoid**	Spring	2-Position, Single DIN Solenoid	35	12-24	24-120-220-240
C5-4DCD*	1/2	Solenoid**	Spring	2-Position, Single DIN Solenoid	35	12-24	24-120-220-240
C2-5DCD*	1/4	Solenoid**	Solenoid	2-Position, Double DIN Solenoid	20	12-24	24-120-220-240
C5-5DCD*	1/2	Solenoid**	Solenoid	2-Position, Double DIN Solenoid	20	12-24	24-120-220-240
C2-6HDCD*	1/4	Solenoid**	Spr. Center	3-Position, Double DIN Solenoid, Pressure Held in Center	45	12-24	24-120-220-240
C2-6RDCD*	1/4	Solenoid**	Spr. Center	3-Position, Double DIN Solenoid, Pressure Released	45	12-24	24-120-220-240
C2-7	1/4	Hand Lever	Spring	2-Position Lever, Spring Return	-	-	-
C5-7	1/2	Hand Lever	Spring	2-Position Lever, Spring Return	-	-	-
C2-8	1/4	Hand Lever	Hand Lever	2-Position Lever, Friction Held	-	-	-
C5-8	1/2	Hand Lever	Hand Lever	2-Position Lever, Friction Held	-	-	-
C2-9H	1/4	Hand Lever	Spr. Center	3-Position Lever, Pressure Held in Center	-	-	-
C2-9R	1/4	Hand Lever	Spr. Center	3-Position Lever, Pressure Released in Center	-	-	-
C2-10H	1/4	Hand Lever	Detented	3-Position Lever, Pressure Held in Center	-	-	-
C2-10R	1/4	Hand Lever	Detented	3-Position Lever, Pressure Released in Center	-	-	-

* Explosion-proof models available.



** Connector not included on solenoid models; see below.

DIN Solenoid Connectors

Electrically actuated Capsula valves utilize a 12mm industrial B-type DIN type solenoid. DIN solenoids feature a totally encapsulated coil with 3 prongs, allowing fast and easy connections. DIN connectors are ordered separately. Mead offers 3 types of DIN connectors to facilitate connections to the solenoid. A full description of these connectors can be found on page 62.



Capsula

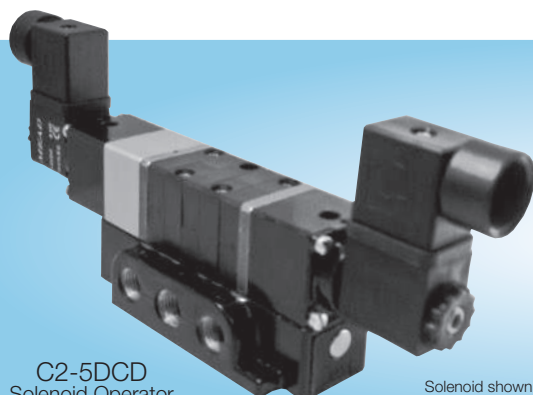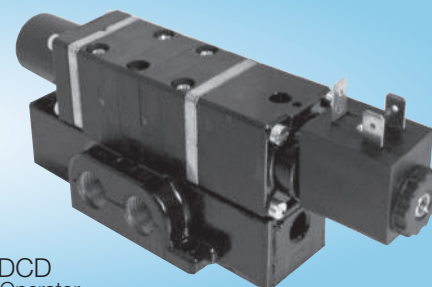
C2-5DCD
Solenoid OperatorSolenoid shown here with two (2)
connectors, PVD1 (sold separately)C2-4DCD
Solenoid Operator

Dimensions

2 mounting holes per valve:

1/4" valves - 7/32" diameter


1/4" valves - 9/32" diameter



Model	Long	Wide	High
C2-1	4-7/32	2	2-1/4
C5-1	7-7/16	3	3-1/4
C2-2H	7-1/32	2	2-1/4
C2-2R	7-1/32	2	2-1/4
C2-3	4-21/32	2	2-1/4
C5-3	7-31/32	3	3-1/4
C2-4DCD	6-1/2	2	2-1/4
C5-4DCD	10-9/32	3	3-1/8
C2-5DCD	7-3/4	2	3-9/16
C5-5DCD	10-13/16	3	3-1/8
C2-6HDCD	10-25/32	2	3-9/16
C2-6RDCD	10-25/32	2	3-9/16
C2-7	5-3/8	2	5-5/8
C5-7	9-3/16	3	8-7/8
C2-8	5-7/8	2	5-5/8
C5-8	6-1/4	3	8-7/8
C2-9H	6-1/4	2	5-5/8
C2-9R	6-1/4	2	5-5/8
C2-10H	6-1/4	2	5-5/8
C2-10R	6-1/4	2	5-5/8

Valve Symbols

C2-1 & C5-1




C2-5DCD & C5-5DCD




C2-9H




C2-2H




C2-6HDCD



C2-9R



C2-2R



C2-6RDCD



C2-10H



C2-3 & C5-3



C2-7 & C5-7



C2-10R



C2-4DCD & C5-4DCD




C2-8 & C5-8



Actuators

The Capsula line offers a wide variety of actuator styles including single and double air piloting, hand lever operators, and single & double solenoid piloting.


Flow Patterns



Capsula valves are 4-way, 5 ported directional control valves. This means that they have one inlet, 2 pressure outputs, and 2 exhaust ports. Dual exhausts facilitate individual flow control of each output port and allow dual pressure and diverter hooksups.

Two Position Models

Whenever the inlet is charged, flow will occur at one output port or the other.

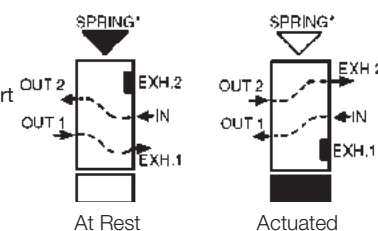


*On double solenoid or double air piloted models, the second actuator replaces the spring.


Three Position Models

Whenever the inlet is charged and neither actuator is signalled, both output ports will either be blocked (pressure held) or exhausted (pressure released). Pressure held models allow a cylinder to be "inched" along. Pressure released models allow the cylinder piston to float in neutral.


Pressure Held Type (H Models)

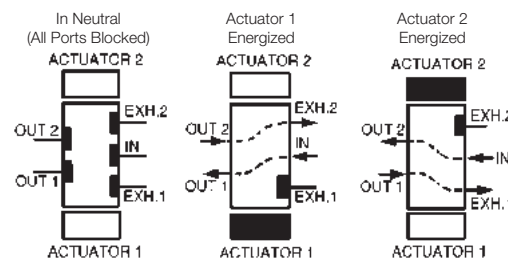

Pressure Release Type (R Models)

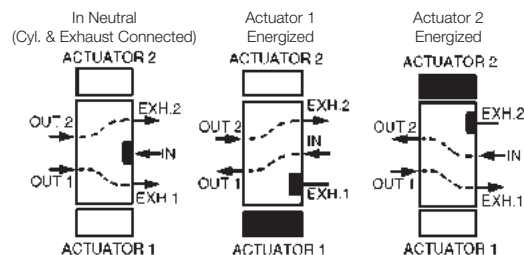

Dura-Matic 4-Way Valves

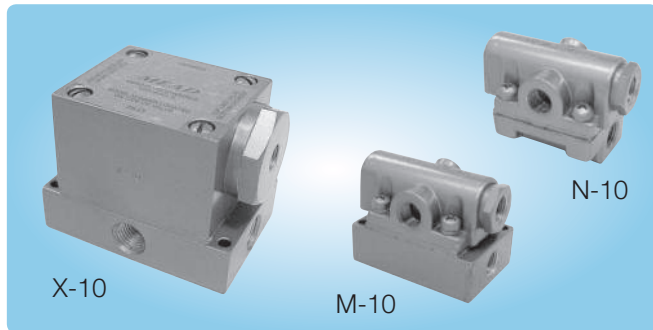

Built-In Speed Controls


Dura-matic 4-way valves not only control cylinder direction but also control cylinder rod speed. Most models include easy-to-use built-in flow controls that permit the user to establish cylinder speeds right at the directional valve.

Remote Air Piloting

Air piloting is a simple and economical way to operate cylinders or other air driven devices; it eliminates the need for electric wiring or solenoids. Dura-matic models are available as either pressure or bleed remote piloting depending upon the model selected. Single piloted models require one remote pilot valve and double piloted models require two.

Pressure Piloted Valves

These valves shift when pressurized air travels from a remote pilot valve to the pilot port of the Dura-matic valve. The table shows the minimum allowable pilot pressures.



Bleed Piloted Valves


Bleed piloted models output air from the pilot port(s). When the remote pilot valve is actuated the air is exhausted, causing the valve to shift. In contrast to pressure piloting, bleed pilot valves do not need separate air supplies. However, they do continue to bleed air as long as they are actuated. Below are two remote bleed pilot valves:

Model	Description	Length	Width
404A	Bleed Limit Valve; 1/8" NPT Fitting	2-1/4"	1/2" Hex
405A	Bleed Limit Valve; 1/4" OD Tubing	2-1/4"	1/2" Hex


A wide variety of pilot operators are provided in the Micro-Line valves section (pages 20-21). This line of valves can be used to remotely pilot either the pressure or the bleed type.

Dimensions

L-10, N-10, T-10 and V-10 (all ports 1/8" NPT)

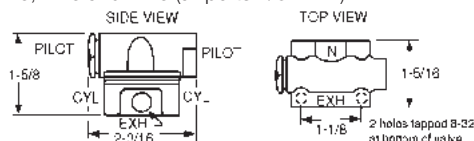

K-10, M-10, O-10 and U-10 (all ports 1/8" NPT)

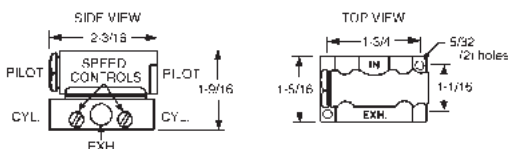

Size (")	Model	Function	Flow*	C _v
1/8	K-10	Single Pressure	13.6	.24
1/8	M-10	Double Pressure	13.6	.24
1/8	O-10	Single Bleed	13.6	.24
1/8	U-10	Double Bleed	13.6	.24
1/4	W-10	Single Pressure	48.5	.63
1/4	X-10	Double Pressure	48.5	.63
1/4	Y-10	Single Bleed	48.5	.63
1/4	Z-10	Double Bleed	48.5	.63
1/8	L-10†	Single Pressure	10.1	.11
1/8	N-10†	Double Pressure	10.1	.11
1/8	T-10†	Single Bleed	10.1	.11
1/8	V-10†	Double Bleed	10.1	.11

* Flow at 100 PSI Inlet pressure (in SCFM)

† These models do not have built-in flow controls.

Technical Specifications


Pressure:	20 to 150 PSI (min. 30 PSI on W-10)
Temperature:	-40° F to 150° F (-40° C to 66° C)
Lubrication:	Petroleum Base Oil
Filtration:	40 Micron

Construction


Type:	Slide (wear compensating nylon)
Dynamic Seals:	Buna-N Block Vs
Plate:	Hardened and lapped aircraft quality steel
Exhaust Ports:	Common to both cylinder ports
Speed Controls:	Needle type with check valve to allow free out flow and controlled exhaust flow

Valve Symbols


K-10 & W-10




U-10 & Z-10




T-10




M-10 & X-10




L-10




V-10




O-10 & Y-10



N-10



W-10, X-10, Y-10 and Z-10 (all ports 1/4" NPT)

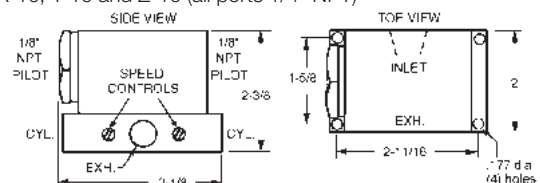


404A



405A

Ergonomic Low Stress Air Valve

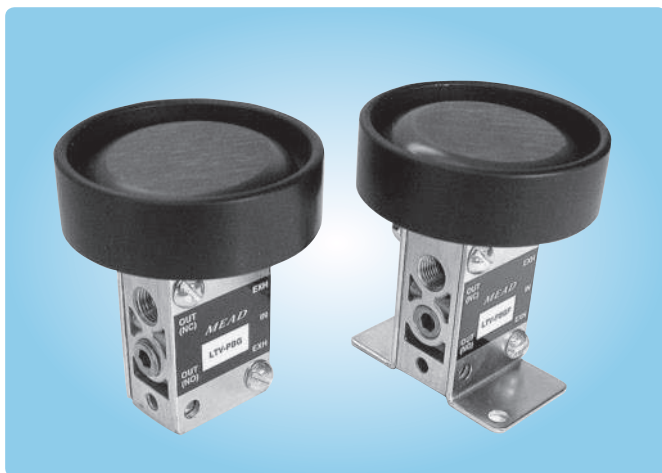

Reduce the Effects of Repetitive Motion

Many machine operators are required to operate air powered equipment hundreds or thousands of times per day. These types of routines can result in repetitive motion disorders such as Carpal Tunnel Syndrome. The debilitating effects usually result in increasing worker compensation claims and declining employee productivity.

Ergonomically designed to respond to extremely low actuation forces, Mead's Low Stress actuators require as little as 6 ounces of force to initiate a signal. This valve will dramatically reduce the demands on your workers' hands, wrists and arms.


How to Order

Three actuator stickers (red, green and black) are included with each valve. All models may be configured 3-way normally open, 3-way normally closed or 4-way.

Model #	Description
LTV-PB	Basic Valve (Unguarded); For Side Mounting
LTV-PBG	Valve with Button Guard; For Side Mounting
LTV-PBGF	Valve with Button Guard; For Foot Mounting
LTV-PBGP	Valve with Button Guard; For Panel Mounting

Mounting Options

The Low Stress Series allows you to choose between three distinct mounting options. Mounting holes are located in the valve body for standard side mounting. For foot bracket or panel mounting, be sure to specify the proper model number (listed below).

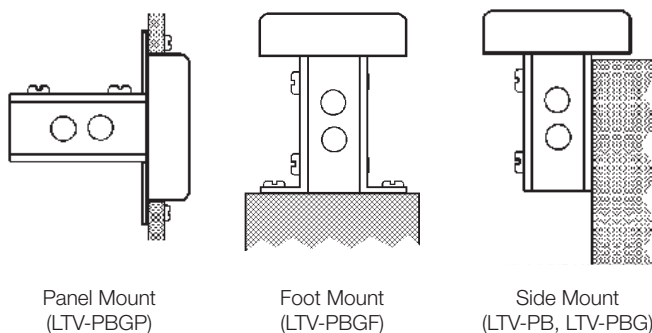


Operating Specifications


LTV Low Stress valves are ported 1/8" NPT. They are shipped with a 3-way normally closed flow pattern for pilot applications, but can be easily converted to 3-way normally open or 4-way flow by removing a port plug.

Technical Specifications	
Temperature:	0° F to 115° F (-18° C to 46° C)
Pressure:	25-125 PSI air
Filtration:	Standard 40 Micron filter recommended to prolong seal life
Lubrication:	Petroleum Based Oil
Flow at 100 PSI:	14 SCFM
Flow:	0.24 C _v

Valve Symbol - All Models




Dimensions

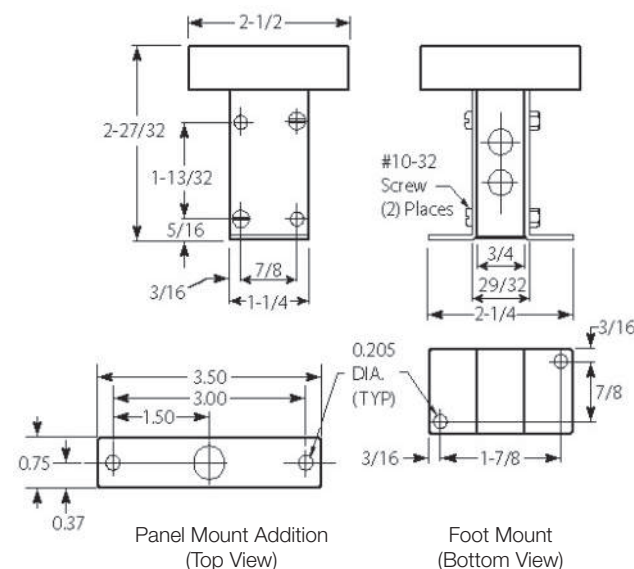

Low Stress Two-Hand Control

To provide safer operation of assembly equipment and other machinery, use the LTV Low Stress valves with the CSV-107 two-hand control unit. When used as directed, this unit demands concurrent actuation from two remote inputs before a signal can be initiated. Further, the release of one or both inputs immediately stops the output signal. The unit cannot recycle until both valves are again simultaneously actuated. The CSV-107 requires no electrical connections. For more information regarding the CSV-107, please see page 57.

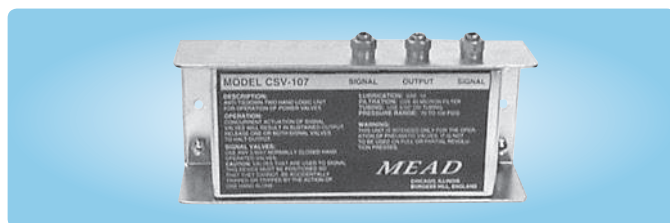

LTV

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories

Index

LTV-5
Pin Plunger



LTV-10
Straight Leaf



LTV-15 Roller Leaf
LTV-90 Nylon Roller



LTV-20
One-Way Roller Leaf



LTV-25*
Roller Plunger



LTV-30*
Cross Plunger




* For 15/32" panel openings; 15/32-32 UNS

Light-Touch, Snap-Acting Control Valves

Mead's LTV valves are compact 1/8" ported 4-way valves that may be actuated by hand, remote air signal, electric signal, or mechanically by a machine element. They are ideal for powering small or medium sized cylinders and for piloting larger valves. Some models require as little as 4 ounces of force and .010" of plunger travel to actuate. See the chart on the opposite page for individual valve specifications.

Micrometer Trip Position Adjustment Available on LTV-10, LTV-15 and LTV-20

An optional screw adjustment on the valve lever allows the user precision control of the valve actuator. Specify LTV-10A, LTV-15A, or LTV-20A.




DIN Solenoid Connectors

Electrically actuated LTV valves utilize DIN type solenoids. DIN solenoids feature a totally encapsulated coil with 3 prongs, allowing fast and easy connections. DIN connectors are ordered separately. Mead offers 3 types of DIN connectors to facilitate connections to the solenoid. A full description of these connectors can be found on page 62.




LTV Flow Patterns

For all models except LTV-60, which is opposite.

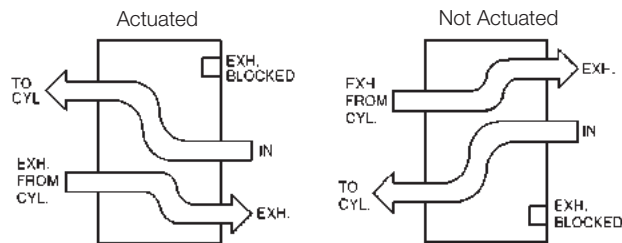

General Specifications	
Pressure Range:	25 to 125 PSI (Solenoid models to 100 PSI)
Temperature:	0° F to 115° F (-18° C to 46° C)
Flow:	0.24 C _v
Flow at 100 PSI:	14 SCFM
Ports:	1/8" NPT Standard; LTV-60 and LTV-110 pilot ports are 10-32
Lubrication:	Petroleum Base Oil
Filtration:	40 Micron Minimum
Body:	Cast Aluminum
Seals:	Buna-N
Spool:	Aluminum
Response:	20-30 ms

Valve Symbols (Only Model Numbers are indicated)

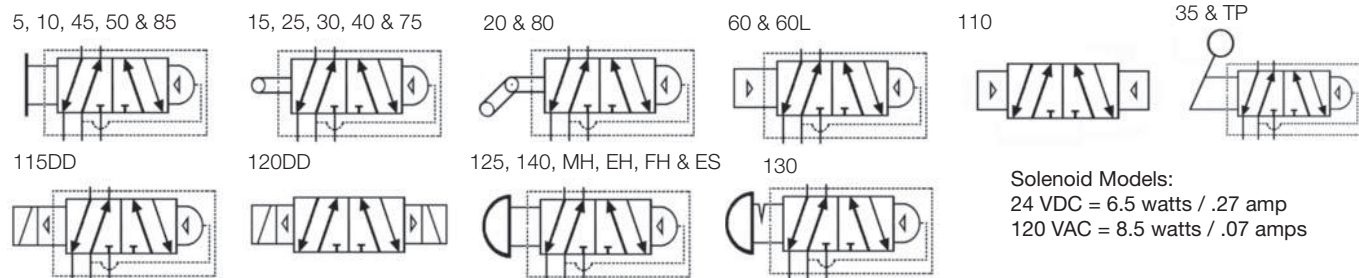

LTV-75
Roller



LTV-80
One-Way Roller



LTV-85
Extended Rod (6")



LTV-115DD
Single Solenoid



LTV-120DD
Double Solenoid



LTV-125, LTV-130
Knob* (LTV-125 has threaded stem)




* For 15/32" panel openings; 15/32-32 UNS

LTV-35*
Flip ToggleLTV-40*
Ball RollerLTV-45*
Straight PlungerLTV-50
Fingertip LeverLTV-60 Single Pressure
LTV-110 Double Pressure Low Pressure

* For 15/32"
panel openings;
15/32-32 UNS


Basic Dimensions

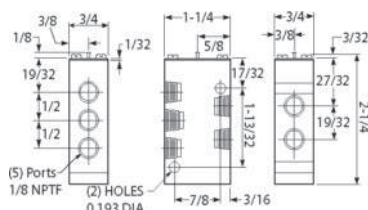

NOTE: Envelope dimensions of valves with actuators are shown in the chart on the right.

LTV Valve Stacks

Stacked valves reduce piping requirements by eliminating the need for a separate air supply to each valve. All LTV valves are stackable except LTV-75, 80, 85, 140, MH, TP, EH, FH and ES. When LTV-50, LTV-115DD or LTV-120DD valves are stacked, 1/4" spacers are added between valves. To order, add "M" to the model number, specify number, type and position of valves.



Solenoids shown here with connector PVD1 (sold separately)

Model	Actuator	Return	Act. Force @ 80 PSI	Act. Stroke Distance (")		Length (")	Width (")	Height (")
				Full Open	Over Travel			
LTV-5	Pin Plunger	Air Spring	13 oz.	.016	.094	1-1/4	3/4	2-3/8
LTV-10	Straight Leaf	Air Spring	5.5 oz.	.016	.156	2-3/32	3/4	2-1/2
LTV-10A	Adjustable Leaf	Air Spring	5.5 oz.	.016	.156	2-3/32	3/4	2-5/8
LTV-15	Roller Leaf	Air Spring	5.5 oz.	.016	.156	2-5/32	3/4	2-7/8
LTV-15A	Adjustable Roller Leaf	Air Spring	5.5 oz.	.016	.156	2-5/32	3/4	3
LTV-20	1-Way Roller Leaf	Air Spring	5.5 oz.	.016	.156	2-3/32	3/4	3-11/32
LTV-20A	Adjustable Roller Leaf	Air Spring	5.5 oz.	.016	.156	2-3/32	3/4	3-15/32
LTV-25	Roller Plunger	Air Spring	13 oz.	.016	.094	1-1/4	3/4	3-5/8
LTV-30	Cross Plunger	Air Spring	13 oz.	.016	.094	1-1/4	3/4	3-5/8
LTV-35	Flip Toggle	Detent	9.25 oz.	30°	-	1-1/4	3/4	3-25/32
LTV-40	Ball Roller	Air Spring	13 oz.	.016	.094	1-1/4	3/4	3-1/32
LTV-45	Straight Plunger	Air Spring	13 oz.	.016	.094	1-1/4	3/4	3-11/32
LTV-50	Fingertip Lever	Air Spring	5.5 oz.	.016	.156	2-17/32	3/4	2-11/16
LTV-60+	Single Pressure~	Air Spring	-	-	-	1-1/4	3/4	2-11/32
LTV-60L	Low Pressure	Air Spring	-	-	-	1-1/4	3/4	3-3/32
LTV-75	Heavy-Duty Roller	Air Spring	14 oz.	.031	.313	2-7/32	3/4	4-5/32
LTV-80	Heavy-Duty 1-Way Roller	Air Spring	14 oz.	.031	.313	2-13/32	3/4	3-17/32
LTV-85	Heavy-Duty Extended Rod	Air Spring	4 oz.	.125	.500	6- 1/4	3/4	3-17/32
LTV-90	Adjustable Roller Leaf	Air Spring	5.5 oz.	.016	.156	2-5/32	3/4	3
LTV-110	Double Pressure~	Ext. Air Pilot	-	-	-	1-1/4	3/4	2-11/32
LTV-115DD**	Solenoid (DIN)	Air Spring	-	-	-	1-5/8	7/8	3-9/32
LTV-120DD**	Solenoid (DIN)	Solenoid	-	-	-	1-5/8	7/8	4-19/32
LTV-125	Knob	Air Spring	13 oz.	.016	-	1-1/4	5/8	3-19/32
LTV-130	Knob	Detent	2 lbs.	.094	.125	1-1/4	5/8	3-9/32
LTV-140	Palm	Air Spring	13 oz.	.016	.094	1-3/8	1 3/8	3-25/32
LTV-MH^	Mushroom Head	Air Spring	1 lb.	.218	.047	1-5/8	1 5/8	4-3/16
LTV-TP	Two Position	Detent	-	-	-	1-5/8	1 5/8	4-5/16
LTV-EH^	Extended Head	Air Spring	-	.218	.049	1-5/8	1 5/8	3-13/16
LTV-FH^	Flush Head	Air Spring	-	.218	.049	1-5/8	1 5/8	3-3/4
LTV-ES	Emergency Stop (Red)	Detent	2 lbs.	.218	.125	2-1/2	2 1/2	4-9/32

* Minimum pilot pressure of 25 PSI required.

** Specify voltage: 12DC, 24DC, 24AC, or 120AC

^ Specify actuator color: red, green or black


+ Pilot pressure must equal at least 60% of inlet pressure.
~ 10-32 pilot port

LTV-140*
PalmLTV-MH**
Mushroom HeadLTV-TP**
Two Position DetentLTV-EH** Extended Head
LTV-FH** Flush HeadLTV-ES
Emergency Stop

* For 15/32" panel openings;
15/32-32 UNS

** For 1 3/16" panel openings


MV 3-Way Switches

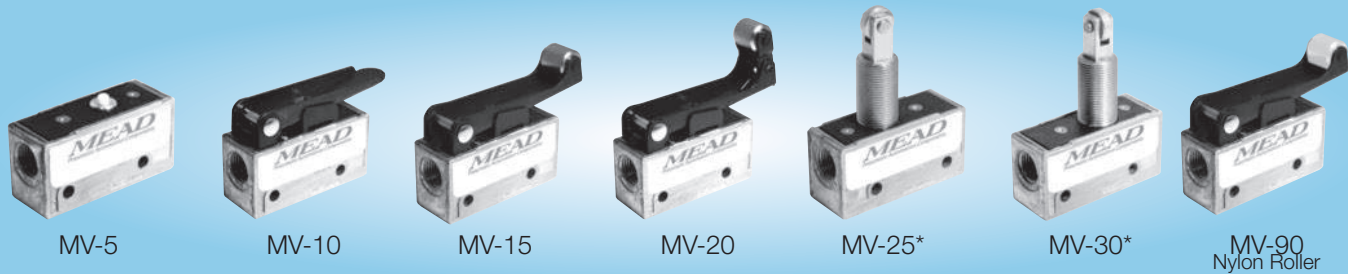

* For 15/32" panel openings; 15/32-32 UNS

Mead's MV air switches are 3-way 1/8" ported air pilot valves that are identical in size, actuating style, and mounting characteristics to most industrial type electric limit switches. Use them in place of electric limits to save on hookup cost and eliminate spark hazard. MV valves simplify circuits by eliminating the need for wire shielding, transformers, and solenoids.

The MV air switch may be piped normally closed, normally open, or as a diverter. These alternatives are described in detail below.

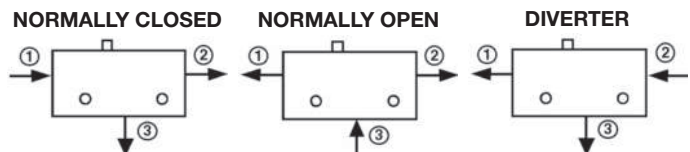

NORMALLY CLOSED
Pressurized air flows from 1 to 2 when button is pushed.

NORMALLY OPEN
Pressurized air flows from 3 to 2 when button is not pushed.

DIVERTER
Pressurized air flows from 2 to 1 when button is pushed.


Exhaust air flows from 2 to 3 when button is released.

Exhaust air flows from 2 to 1 when button is pressed.

Pressurized air flows from 2 to 3 when button is released. This hookup does not provide for exhaust.

General Specifications	
Pressure Range:	Vacuum to 120 PSI
Media:	Air or Inert Gas
Flow:	0.11 C _v
Flow at 100 PSI:	6 SCFM
Ports:	1/8" NPT
Cycle Life:	7-10 million
Force to Actuate:	As Low as 6.4 Ounces
Max. Ambient Temperature:	115° F (46° C)
Lubrication:	Not Required
Filtration:	40 Micron
Seals:	Viton
Spool:	Dupont Teflon®
Body:	Cast Zinc

Perform "AND" Logic Function with MV-60




This hookup provides that flow will occur at C only when air signals are received at A and B. The MV-60 is a 3-way air piloted valve.

Valve Symbols

MV-5, 10, 45, 50, 70 & 85

MV-20 & 80

MV-60




MV-15, 25, 30, 40, 75 & 90

MV-35 & TP



2060280 & 2060400

MV-140, EH, FH, MH & ES



Add Push to Connect 1/4" Fittings



MV-45-C4


MV valves are available with 1/4" brass push to connect fittings. The valve will be provided with a fitting for the inlet, outlet and the exhausts ports. Any MV valve may utilize this option. The valve's body height increases by 5/16" and the mounting holes are 0.532" apart.



MV-75



MV-80

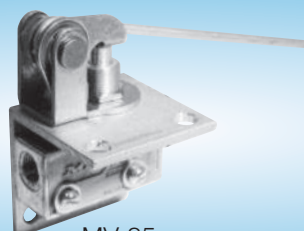

MV-85
(Lever 6" long)



MV-140*



MV-MH†

* For 15/32" panel openings; 15/32-32 UNS

MV 3-Way Switches

MV-35*
Locks In Down Position


MV-40*



MV-45*




MV-50

MV-60
1/8" NPT Pilot PortMV-70
Lever 4 1/4" long

Basic Valve Dimensions


* For 15/32" panel openings; 15/32-32 UNS

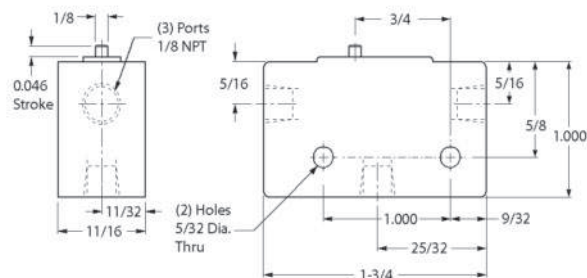

Envelope dimensions of valves are shown in the chart to the right.

Model #2060400

Model has plug-in fittings for 1/4" OD tube



Model #2060400G (Guarded)



NOTE: 2060400 and 2060400G are provided with push to connect fittings as the C4 option (described on opposite page).

Model	Actuator	Act. Force lbs. @ 100 PSI		Act. Stroke Distance			Envelope Dimensions		
		NC	NO	To Crack Open	To Full Open	Over Travel	Len.	Wid.	Hgt.
MV-5	Pin Plunger	2.5	3.3	.035	.046	.035	1-3/4	11/16	1
MV-10	Straight Leaf	1.2	1.5	.100	.137	.079	2-3/16	11/16	1-1/4
MV-15	Steel Roller	1.0	1.3	.100	.137	.079	2-3/16	11/16	1-5/8
MV-20	1-Way Roller Leaf	1.0	1.3	.100	.137	.079	2-3/16	11/16	2-1/16
MV-25	Roller Plunger	2.8	3.5	.035	.046	.155	1-3/4	11/16	2-3/16
MV-30	Cross Roller	2.8	3.5	.035	.046	.155	1-3/4	11/16	2-5/16
MV-35	Flip Toggle	1.5	2.3	35°	35°	35°	1-3/4	11/16	2-5/16
MV-40	Ball Roller	2.5	3.3	.035	.046	.035	1-3/4	11/16	1-19/32
MV-45	Straight Plunger	2.5	3.3	.035	.046	.155	1-3/4	11/16	1-29/32
MV-50	Fingertip Lever	1.0	1.3	.100	.137	.079	2-5/8	11/16	1-3/8
MV-60	Pressure Piloted	40*	40*	-	-	-	1-3/4	11/16	1-5/8
MV-70	Extended Leaf	0.7	1.0	.255	.315	.195	4-1/2	11/16	1-9/16
MV-75	HD Roller Leaf	2.8	3.5	.093	.119	.129	2-1/4	1-3/4	3-7/16
MV-80	HD 1-Way Roller	2.8	3.5	.093	.119	.129	2-1/8	1-3/4	4-1/8
MV-85	HD Extended Rod	0.4	0.6	.637	.782	.330	6-1/4	1-3/4	3-1/8
MV-90	Nylon Roller	1.0	1.3	.100	.137	.079	2-3/16	11/16	1-5/8
MV-140	Palm Actuator	2.5	3.3	-	-	-	1-3/4	1-3/8	2-1/4
MV-MH	Mushroom Head	-	-	-	-	-	1-3/4	1-1/2	2-5/8
MV-TP	Two Position	-	-	-	-	-	1-3/4	1-1/2	3-1/32
MV-FH	Flush Head	-	-	-	-	-	1-3/4	1-1/2	2-7/32
MV-EH	Extended Head	-	-	-	-	-	1-3/4	1-1/2	2-13/32
MV-ES	Emergency Stop	-	-	-	-	-	2-1/2	2-1/2	2-7/8
MV-EMS	Emergency Stop	-	-	-	-	-	1-3/4	1-5/8	3-1/4

* PSI
NO = Normally Open
NC = Normally Closed

MV-TP‡


MV-FH (Button Flush)‡
Specify Red, Green or BlackMV-EH (Button 5/16" Up)‡
Specify Red, Green or BlackMV-ES‡
Red & Spring Return OnlyMV-EMS
Red & Manual Only

‡ For 1-3/16" panel opening

These compact air valves provide economical cam, fingertip, palm, hand, and foot actuation. 3-way models are ideal for actuating single-acting cylinders and 4-way directional valves. 4-way models are suitable for the control of double-acting cylinders. Three types of spool designs are available.

General Specifications

Media:	Air to 150 PSI
Temperature Range:	-40° F to 250° F (-40° C to 121° C)
Cam Buttons:	Hardened Steel
Spring:	Stainless Steel
Seals:	Buna-N
Body:	Machined Aluminum
Body (4B-1, 4W-1, 201 and 3C-1):	Die Cast Zinc

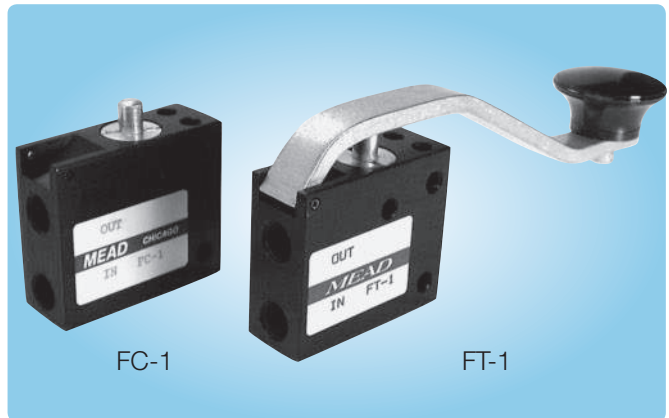


FC-1

FT-1

Poppet Spool Type

A high degree of reliability is achieved by these valves with the simple yet efficient poppet type design. A short operating stroke assures instantaneous response while minimizing operator fatigue.

Model Number	Actuator	Style	Port (NPT)	Flow (C.)	Pre-Travel	Over Travel	Force Req. @ 100 PSI
FC-1	Cam Button	3-Way NC	1/8"	0.13	3/64"	None	17lbs.
FC-2A	Cam Button	3-Way NO	1/8"	0.32	1/8"	1/8"	11lbs.
FC-101	Cam Button	3-Way NC	3/8"	1.15	1/16"	None	30lbs.
FT-1	Fingertip Lever	3-Way NC	1/8"	0.13	1/4"	None	4lbs.
FT-2A	Fingertip Lever	3-Way NO	1/8"	0.32	7/8"	1/8"	2lbs.
FT-4	Fingertip Lever	4-Way	1/8"	0.16	7/8"	None	3lbs.
FT-101	Fingertip Lever	3-Way NC	3/8"	1.15	3/16"	None	8lbs.
201	Foot Treadle	3-Way	3/8"	1.15	5/8"	None	7-1/2 lbs.

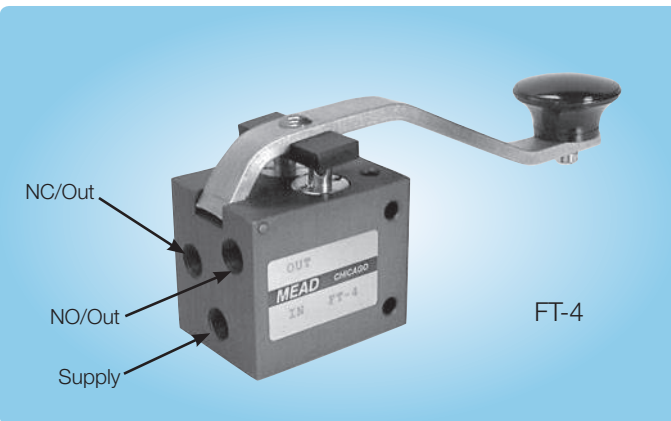

FT-4

Valve Symbols

FC-1, FC-2A & FC-101 FT-1 & FT-101


FC-2A

FT-4

201 (NC Setup)

201 (NO Setup)

201 (Detent Setup)







Dimensions

Models FC-1, & FC-2A, FT-1, FT-2A

Models FC-101 & FT-101


Model FT-4

Model 201




Flow Patterns

Model 201



Model 201 may be adjusted in seconds during installation to be detented or spring return. The valve may be set up as either normally open or normally closed for spring return operation.

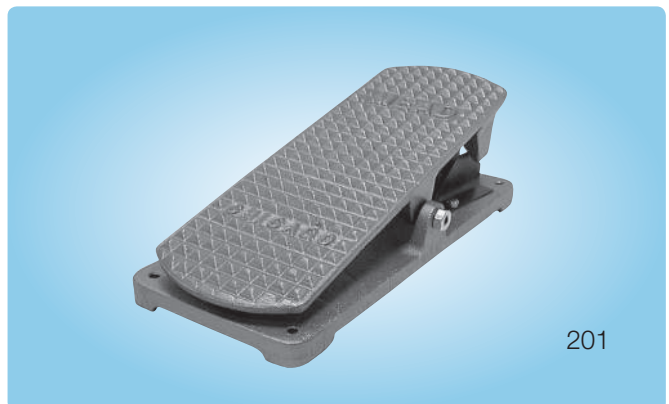

201

General Purpose Cam, Foot, Hand and Button Valves



FC-52

PC-51

Balanced Spool Type

Actuating Force remains constant regardless of air pressure due to the balanced spool design. This series is particularly suited for use in situations where a high rate of flow is required through a 3-Way cam or palm button valve. Additionally, the spool design eliminates the momentary loss of pressure due to valve shifting.

Model Number	Actuator	Style	Port (NPT)	Flow (C.)	Pre-Travel	Over Travel	Force Req. @ 100 PSI
FC-51	Cam Button	3-Way NC	1/8"	0.81	1/8"	1/8"	7lbs.
FC-52	Cam Button	3-Way NO	1/8"	0.68	1/8"	1/8"	5lbs.
PC-51	Palm Button Spr. Ret.	3-Way NC	1/8"	0.81	1/8"	1/8"	7lbs.
PC-51A	Palm Button Detent	3-Way NC	1/8"	0.81	1/8"	1/8"	3lbs.
PC-52	Palm Button	3-Way NO	1/8"	0.68	1/8"	1/8"	5lbs.

Valve Symbols

FC-51


FC-52

PC-51 & PC-51A

PC-52



Dimensions

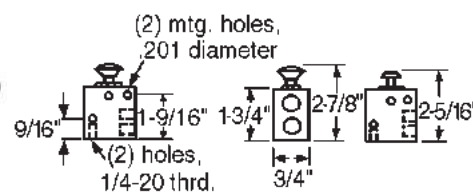


Spool Type - Rugged Conditions

Time-tested reliability is the trademark of these valves. Due to the unique design, performance is not greatly affected by the use of unclean air and operation in chip and dirt-ridden environments.

Model Number	Actuator	Style	Port (NPT)	Flow (C.)	Pre-Travel	Over Travel	Force Req. @ 100 PSI
3C-1	Cam Button	3-Way NC	1/4"	0.48	1/16"	None	9lbs.
4B-1	Hand	4-Way	1/4"	0.48	5/8"	None	5lbs.
4W-1	Foot Treadle	4-Way	1/4"	0.48	5/16"	None	18lbs.

Flow Patterns


Models 4B-1 and 4W-1

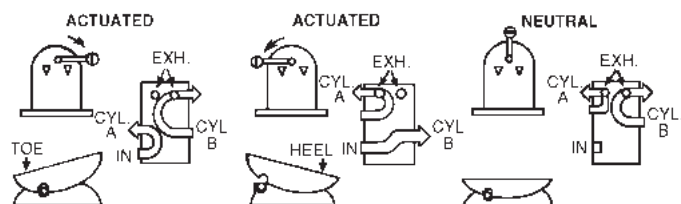

NOTE: In neutral, cylinder ports are dumped to atmosphere.

Valve Symbols

3C-1




4W-1





4B-1




Dimensions

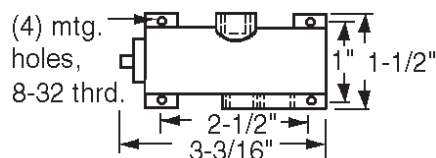

NOTE: height is 1-1/2".

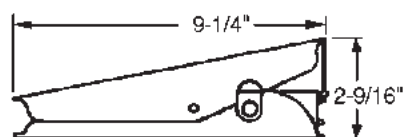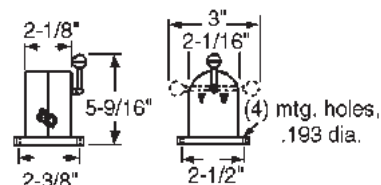

NOTE: width is 3-5/16".

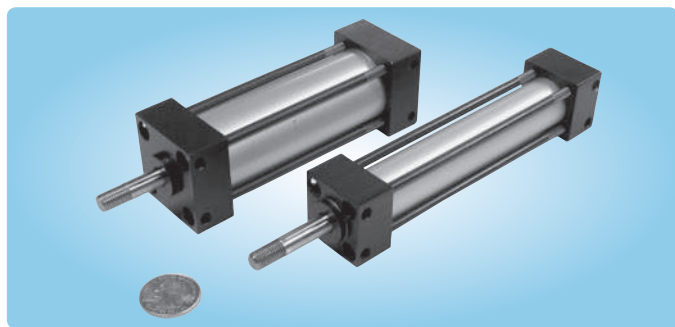

Cylinder Materials

Heads:	Machined from solid aluminum; black anodized
Tubes:	Aluminum hard anodized to 60 Rc (16 RMS finish)
Piston:	Solid high alloy aluminum
Rod:	Hard chrome plated ground and polished steel
Bearing:	Long wearing, oil impregnated porous bronze
Piston and Rod Seals:	Wear compensating Buna-N vee rings
Rod Wiper:	PTFE
Tie Rods:	High tensile steel torqued to allow for flexure

Double-Rod Cylinders


Cylinders having a common piston rod that protrudes from both ends are available in all bore sizes. In addition to providing a dual power source, double rod cylinders serve to minimize rod deflection and to facilitate the control and adjustment of rod travel.

Specify Cushions for Shock Absorption

Model DM-112 is available with adjustable cushions that decelerate the piston rod over the last 11/16" of stroke. They allow the user to set the degree of cushioning needed for each specific application.


NOTE: Cushions are not recommended for hydraulic use.

Pneumatic End-of-Stroke Sensors (Inter-Pilots®)



A miniature 3-way valve built into the cylinder head is actuated by the cylinder piston as it reaches the end of its stroke. Once contacted, the 3-way Inter-Pilot® valve emits an air signal. In this manner, sequencing is achieved without external limit switches and electric wiring.

Inter-Pilots® may be built (10-32 Ports) into either or both cylinder heads. They are not for hydraulic use. Cylinder operating pressure must not exceed pressure used to feed the Inter-Pilot®. Inter-Pilots® are not available on DM-075.



Operating Parameters

Bore Diam.	Thrust*	Thrust Mult.**	Rod Diam. (In.)	Max. Oper.	
				Air	Oil†
3/4"	44	.44	5/16	250	1000
1-1/8"	100	1.00	5/16	250	1000

* Pushing force of cylinder at 100 PSI inlet pressure. Pulling force will be about 10% less due to the displacement of the piston rod. NOTE: Actual realizable thrust could be somewhat lower due to side loading and internal friction. It is best to oversize your cylinder by about 25% to assure smooth operation.

** To determine thrust at other inlet pressures, multiply factor by the desired pressure.

† DM cylinders are not rated or approved for use in hydraulic circuits where an impulse or pressure spike may occur.

Operating Specifications

Temp. Range:	-40° F to 250° F (-40° C to 121° C) (to 400° F [204° C] on request)
Lubrication:	Not necessary, but will extend cylinder life when operated with dry air.
Filtration:	Not essential, but a standard 40 micron filter placed upstream will prolong seal life.

Pneumatic Stroke Completion Sensors (SCS)




Port mounted SCS valves emit an air signal when the cylinder rod has stopped even if the piston has not contacted the end cap. SCS valves are ideal for use in situations where the full cylinder stroke is not used. See page 54.

Accessories

	Bore Diameter	3/4"	1-1/8"
	Flex Rod Couplers	DMA-312	DMA-312
	Forged Rod Clevis	DMC-5	DMC-5
	Pivot Bracket	NA	DMP-7
	Clevis Bracket (with pin)	NA	DMR-7

Self Aligning Rod Couplers

Rod couplers simplify cylinder alignment problems by compensating



for 2Y° angular error and 1/16" lateral misalignment on both extension and retraction strokes. Greater reliability is achieved by reducing cylinder and component wear. Order model #DMA-312 for these small bore cylinders. For other models, see page 41 for dimensions.


Part #	Rod Thread	Cylinder Type
DMA-312	5/16-24	C-112, DM-075, DM-112
DMA-375	3/8-24	No Standard
DMA-437	7/16-20	DM-150, DM2-150, HD1-150, DM-200, DM2-200, HD1-200, DM-250, DM2-250, HD1-250
DMA-500	1/2-20	C-150
DMA-625	5/8-18	C-250
DMA-750	3/4-16	DM-325, DM2-325, HD1-325, DM-400, DM2-400, HD1-400
DMA-875	7/8-14	No Standard
DMA-1000	1-14	C-300, DM-600, HD1-600
DMA-1250	1-1/4-12	No Standard

Small Bore Tie Rod Dimensions and Ordering Information


Bore	3/4	1-1/8
A	1/2	1/2
CB	-	5/8
CD	25/64	25/64
CR	2-1/4	2-1/4
CW	-	1/2
DD	13/64	13/64
E	1-1/4	1-5/8
EB	1-7/16	1-7/16
EE (NPTF)	1/8	1/8
EF	11/32	11/32
EJ	13/64	13/64
F	-	1/8
FB	7/32	7/32
G	3/4	3/4
J	3/4	3/4
KK	5/16-24	5/16-24
FL	1-1/8	5/8 Clevis 1-1/4 Pivot
M	-	3/8
MM	5/16	5/16
NT	13/64-Thru	13/64-Thru
R	13/16	1-1/8
RT	10-32	10-32
ST	9/32	9/32
SV	5/16	5/16
TF	2-13/32	2-25/32
TN	13/16	1-1/8
UF	2-29/32	3-9/32
W	1/2	1/2
XT	11/16	11/16
H	7/8	7/8
HA	1-1/4	1-1/4
HB	1/4	1/4
HC	5/8	5/8
HD	5/16	5/16
HE	3/4	3/4
SN*	1-3/4	1-3/4
XD*	3-3/4	3-7/8 Pivot 3-1/4 Clevis
ZJ*	2-5/8	2-5/8
ZM**	3-1/8	3-1/8

* Add Stroke Length to Dimension


** Add 2x Stroke Length to Dimension

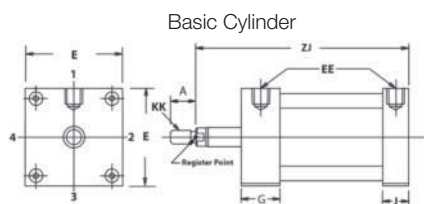


Basic Cylinder

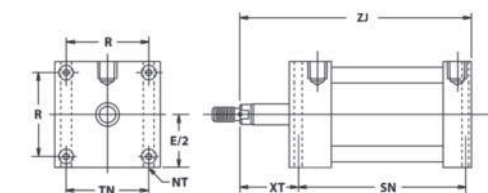


Bottom Flush Model FB

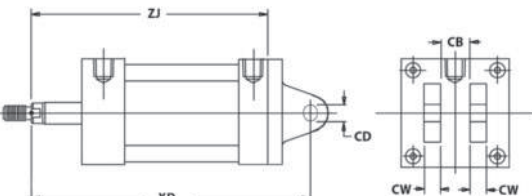


Clevis Model PB

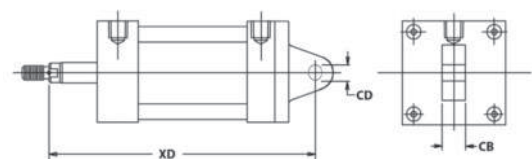

Pivot Model PE

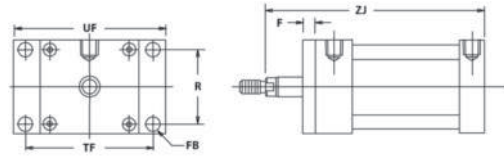


Rod End Flange Model FF*



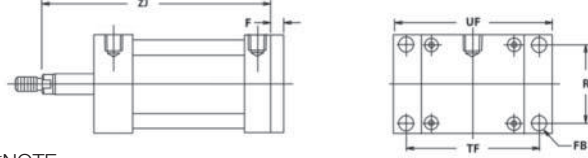


Blind End Flange Model FR*


Double Rod Model DR

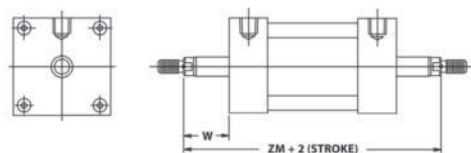

DMC Forged Rod Clevis w/Pin

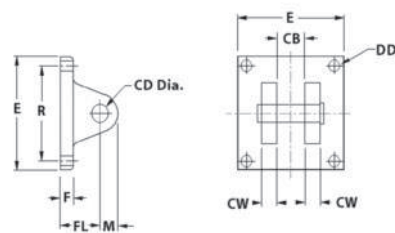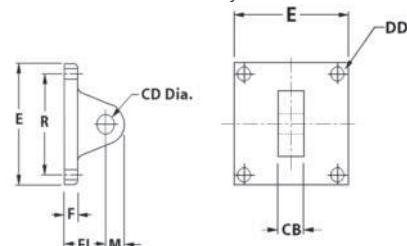DMR Clevis Bracket w/Pin
1-1/8" OnlyDMP Pivot Bracket
1-1/8" Only

Self Aligning Rod Couplers



*NOTE:

- (1) 1-1/8" bore cylinders use two angle brackets for flange mounting (no flange plate)
- (2) On 1-1/8" bore models with ram end cushions and/or Inter-Pilots®, 9/16" must be added to G, ZB, SN, and XD dimensions. For blind end cushions and/or Inter-Pilots®, 5/8" must be added to J, ZJ, SN, and XD dimensions.
- (3) 3/4" and 1-1/8" bore cylinders use spacers for fractional strokes. For dimensioning, use the next even inch stroke. For true fractional stroke cylinders, specify CT (cut to length).
- (4) 3/4" and 1-1/8" bore models have four (4) 10-32 threaded holes for rear flush mounting.

How To Order

DM-112 x 10 - FB - DR

Base Model

DM-075 (3/4" Bore)
DM-112 (1-1/8" Bore)

Stroke

State Fractional Strokes as decimals (i.e. 10.5)

NOTE: These cylinders use spacers for fractional stroke. For dimensioning, use the next even stroke. For true fractional stroke cylinders specify CT (i.e. , 10.5 CT)

Mounting




NOTE: DM-075 only available with FB Mount.

In addition to Models shown above, the  DM-112 is available in a Nose Mount (NS). Consult the factory for dimensional information.







FF Option

Front Flange - Plate extends beyond the front head. * On 1-1/8" bore cylinder, two flange bars replace the flange plate.

Options

- DR  Double Rod
- VI  Viton Seals
- HY  Hydraulic Use

Options below are only available on DM-112

- CF  Front Cushions
- CR  Rear Cushions
- CB  Cushions Both Ends
- IPF  Interpilots - Front Head
- IPR  Interpilots - Rear Head
- IPB  Interpilots - Both Heads

DM2

DM1

Two Designs to Meet Application Demands

Mead Dyna-Mation cylinders are available two design series, the DM1 and the DM2. The DM1 series incorporates tie-rod construction while the DM2 series cylinders are constructed with an extruded body design, making these cylinders better suited for wash down applications and clean environments.

Specify Cushions for Shock Absorption

Adjustable cushions that decelerate the piston rod over the last 11/16" of stroke may be ordered in either or both ends of Dyna-Mation cylinders. They allow the user to set the degree of cushioning needed for each specific application.

A built-in check valve assures a fast getaway in the opposite direction. The tough cushion seal combines with the ultra-smooth control stem to provide years of reliable service.

Built to Last (Materials)

- Cylinder heads are machined from solid aluminum bar stock and black anodized
- Tubes (DM1) and Tube Extrusions (DM2) are aluminum hard anodized to 60 Rc (16 RMS finish)
- Pistons are solid high alloy aluminum
- Pistons have a PTFE wear band
- Dynamic seals are high quality wear-compensating Buna-N block V rings
- Rods are hard chrome plated ground and polished steel
- Rod Wipers are PTFE
- Tie Rods (DM1) are high tensile steel torqued to allow for flexure

Operating Parameters

Bore Diam.	Thrust*	Thrust Mult.**	Rod Diam. (In.)	Max. Oper.	
				Air	Oil†
1-1/2"	177	1.77	5/8	250	1000
2"	314	3.14	5/8	250	1000
2-1/2"	491	4.91	5/8	250	1000
3-1/4"	830	8.30	1	250	700
4"	1257	12.57	1	250	650
6"	2827	28.27	1-3/8	250	435

* Pushing force of cylinder at 100 PSI inlet pressure. Pulling force will be about 10% less due to the displacement of the piston rod. NOTE: Actual realizable thrust could be somewhat lower due to side loading and internal friction. It is best to oversize your cylinder by about 25% to assure smooth operation.

** To determine thrust at other inlet pressures, multiply factor by the desired pressure.

† DM cylinders are not rated or approved for use in hydraulic circuits where an impulse or pressure spike may occur.


NOTE: 6" bore only available in DM1 Series.

Dyna-Mation vs. HD Models

Dyna-Mation cylinders are designed to generate high performance in most applications. However, when operating conditions are severe, heavy duty models (HD Series, see pages 34-43) are recommended. The HD Series boasts the added benefits of a large hard-coated outboard rod bearing. The following profiles illustrate the differences of the rod end head in all three types of cylinders:



DM2
Extruded Body Design with
Internal Rod Bearing



DM1
Internal Bronze Rod
Bearing Tie Rod Design



HDI
Heavy Duty Hard-
Coated Rod Bearing

Operating Specifications

Temp. Range:	-40° F to 250° F (-40° C to 121° C) (to 400° F (204° C) on request)
Lubrication:	Not necessary, but will extend cylinder life when operated with dry air.
Filtration:	A standard 40 micron filter placed upstream will prolong seal life.

Double Rod Cylinders

Cylinders having a common piston rod that protrudes from both ends are available in all bore sizes. In addition to providing a dual power source, double rod cylinders serve to minimize rod deflection and to facilitate the control and adjustment of rod travel. See page 30 for ordering instructions.

Right Angle Flow Controls




Control the speed of your cylinders with Mead Flow Control Valves. Right-angle flow controls can be found on page 62. For precise metering of air, see Mead Dyla-Trol Valves on page 56.

Dyna-Mation Series: DM1 & DM2



Pivot Mount

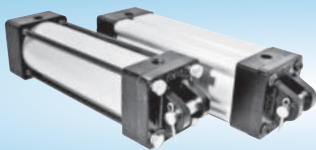

Clevis Mount



Rear Flange




Front Flange


Accessories

Rod clevises, rod eyes, pivot brackets, clevis brackets, and pivot pins are available in each bore size to accomplish all four of the combinations illustrated below.


Rod Clevis and Pivot Bracket




Clevis Bracket and PE Cylinder




Rod Eye and Clevis Bracket



Pivot Bracket and PB Cylinder



Pneumatic End-of-Stroke Sensors (Inter-Pilots®)




A miniature 3-way valve built into the cylinder head is actuated by the cylinder piston as it reaches the end of its stroke. Once contacted, the 3-way Inter-Pilot® valve emits an air signal. In this manner, sequencing is achieved without external limit switches and electric wiring.


Inter-Pilots® may be built into either or both cylinder heads. They are not for hydraulic use. Cylinder operating pressure must not exceed pressure used to feed the Inter-Pilot®.

Inter-Pilot® Port Locations

For 1-1/2" Bore Cylinders




For 2"-4" Bore Cylinders



NOTE: Inter-Pilot® ports are 10-32.

Rod Position Sensors



Solid State and Reed Switches allow the cylinder user to sense rod position anywhere within the stroke. Switches are available for both models. For the DM1, series the switch attaches to any of the four tie-rods. For the DM2 series, a dovetail slot runs along the cylinder tube to facilitate fast and accurate position setting.

Solid State

Solid State effect technology provides contactless switching. With contactless switching there are no moving parts; therefore, reliability and life expectancy are greatly increased. Solid State switches come with built-in indicator lights (3 wire), reverse polarity and surge protection standard. Order either sinking or sourcing depending on logic systems requirements. They have an IP67 protection rating.

Technical Information			
Operating Voltage:	5-28 DC	Working Temp:	23° F to 194° F (-5° C to 90° C)
Operating Time:	On 2 ms Off .1 ms	Repeatability:	.001 ms
Current Sinking:	Load connected between output and positive supply.		
Current Sourcing:	Load is connected between output and common.		

Reed

Mead Reed Switches are epoxy encapsulated and economically priced for reliable low cost position sensing. Reed switches come with wire leads. LED (2 wire, 3m length) included.

NOTE: Not for use with hydraulic cylinders.


Technical Information			
Operating Voltage:	240 AC Max.	Working Temp:	67° F to 200° F (19° C to 93° C)
Switch Current:	.5 Amps Max. 10 Watts Max.	Operating Time:	On .5 ms Off .5 ms

Pneumatic Stroke Completion Sensors (SCS)



Port mounted SCS valves emit an air signal when the cylinder rod has stopped, even if the piston has not contacted the end cap. SCS valves are ideal for use in situations where the full cylinder stroke is not used. SCS valves are available in 1/8", 1/4", 1/2" pipe sizes. See page 54.

Self Aligning Rod Couplers




Rod couplers simplify cylinder alignment problems by compensating for 2Y angular error and 1/16" lateral misalignment on both extension and retraction strokes. Greater reliability is achieved by reducing cylinder and component wear. All components are heat treated for wear and corrosion resistance.

* See page 26 for complete listing of Mead's self aligning rod couplers.

Ordering Dyna-Mation DM1 & DM2

STEP 1:




SELECT A BORE SIZE

Bore	1-1/2"	2"	2-1/2"	3-1/4"	4"	6"
Force*	177	314	491	830	1257	2827
Models Available	DM1-150	DM1-200	DM1-250	DM1-325	DM1-400	DM-600
	DM2-150	DM2-200	DM2-250	DM2-325	DM2-400	NA

* Maximum force output at 100 PSI inlet pressure (in lbs.)

STEP 2:



CHOOSE STROKE LENGTH

PISTON ROD DIAMETERS

Bore	1-1/2"	2"	2-1/2"	3-1/4"	4"	6"
Rod Diam.	5/8"	5/8"	5/8"	1"	1"	1-3/8"

Non Standard Piston Rods: Special rod threads or extensions are available. Please enclose a sketch of what you require.

NOTE: Stroke costs vary with differing bore sizes. Extra charges may be incurred for fractional strokes and strokes over 12".

STEP 3:








SELECT A MOUNTING STYLE

		Mead Code	Bore Diameter						NFPA Code	Description
			1-1/2"	2"	2-1/2"	3-1/4"	4"	6"		
Flush Bottom		FB	•	•	•	•	•	•	MS-4	Four tapped holes on bottom of cylinder.
Long Clevis		PB	•	•	•	•	•	•	MP-2	Two ears extend from rear head (clevis is detachable).
Short Clevis		PF	•	•	•	•	•	NA	MP-1	Two ears extend from rear head (clevis is detachable).
Pivot		PE	•	•	•	•	•	•	MP-4	A single ear extends from rear head (pivot is detachable).
Tie Rods Ext. Front		TIF	•	•	•	•	•	•	MX-3	All four tie-rods extend forward from cylinder face. Consult factory for rear extended tie-rods (or both ends).
Front Flange NFPA Std.		FH	•	•	•	•	•	•	MF-1	Flange plate extends beyond the front head.
Rear Flange		FR	•	•	•	•	•	•	MF-2	Flange plate extends beyond the rear head.
Trunnion Front		TF	•	•	•	•	•	•	MT-1	Two pivot bars extend from two sides of front head. Not available with front Inter-Pilots® or front cushions.
Trunnion Rear		TR	•	•	•	•	•	•	MT-2	Two pivot bars extend from two side of rear head. Not available with rear Inter-Pilots® or rear cushions.
Foot		FT	•	•	•	•	•	•	Non Std.	A plate with two holes is mounted to the bottom of each head.

Ordering Dyna-Mation DM1 & DM2

STEP 4:

SELECT CYLINDER OPTIONS

		Mead Code	Bore Diameter						Description
			1-1/2"	2"	2-1/2"	3-1/4"	4"	6"	
Double Rod		DR	•	•	•	•	•	•	Rod extends through both heads: adds to cylinder rigidity
Cushions (not available with Trunnion Mount)		Front (CF) Rear (CR) Both (CB)	•	•	•	•	•	•	Dampen the impact and sound that occur at stroke completion; cushions are adjustable.
Inter-Pilots (not available with Trunnion Mount)		Front (IPF) Rear (IPR) Both (IPB)	•	•	•	•	•	•	Inter-Pilots emit an air signal at the end of each stroke. Integral with cylinder head. NOTE: Not available on hydraulic cylinders.
Non-Rotating Rod (6" Max. Stroke)		NR	NA	NA	NA	•	•	•	Internal bar prevents piston and rod rotation.
Non-Lube Seals		NL	•	•	•	•	•	•	Self-Lubricating seals are used in place of standard Buna-N seals. NOTE: Not available on hydraulic cylinders.
High Temp. Seals (Viton)		VI	•	•	•	•	•	•	Viton seals are suitable for high temperature environments (400° F / 204° C max.)
Magnetic Pistons		MP	•	•	•	•	•	•	Enables Reed and Solid State switches to sense piston location. NOTE: Reed switch/Solid State not available on all hydraulic cylinders. Contact Mead.

STEP 5:

BUILD A MODEL NUMBER

Model Number	Stroke	Mounting Style	Options
--------------	--------	----------------	---------

When ordering Dyna-Mation cylinders, list the:

1. Model Number
2. Stroke
3. Mounting Style
4. Options (if needed)

DM2-200 X 10 - PB - CF

2" Bore ————
 10" Stroke ————
 Clevis Mount (PB) ————
 Cushioned Front (CF) ————

Solid State Switches

Sourcing

For DM1 series: CS-6200P
 For DM2 series: CS-7500P

Sinking

For DM1 series: CS-6200N
 For DM2 series: CS-7500N

Lead length: 3 meters. Cylinders must have a magnetic piston (MP). For technical information, see page 29.

Reed Switches

For DM1 series: CS-6200R
 For DM2 series: CS-7500R
 Plain Wire Leads







Cylinders must have a magnetic piston (MP). For technical information, see page 29.

Special Cylinders

We invite inquiries regarding non-standard cylinders. Please call your local Mead representative.


Toll-free 877-MEAD USA

Accessories

	Bore Diameter	1-1/2"	2"	2-1/2"	3-1/4"	4"	6"
	Flex Rod Couplers	DMA-437	DMA-437	DMA-437	DMA-750	DMA-750	DMA-1000
	Forged Rod Clevis	DMC-1	DMC-1	DMC-1	NA	NA	NA
	Rod Clevis (NFPA Std.)	DMC-2	DMC-2	DMC-2	DMC-4	DMC-4	DMC-6
	Machined Rod Eye (NFPA Std.)	DME-1	DME-1	DME-1	DME-2	DME-2	DME-3
	Pivot Bracket	DMP-1	DMP-2	DMP-3	DMP-4	DMP-5	DMP-8
	Clevis Bracket (with Pin)	DMR-1	DMR-2	DMR-3	DMR-4	DMR-5	DMR-8


NOTE: DMP and DMR Pivot and Clevis brackets do not include any mounting hardware. See page 41 for mount kits.

Basic Cylinder

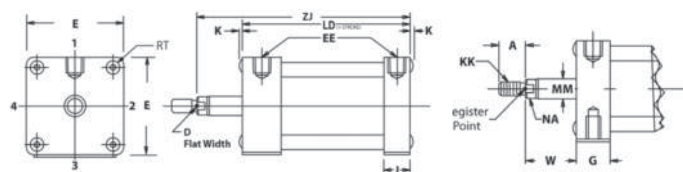


NOTE: DM1 cylinders are constructed with sleeve nuts. For DM1, use RT; K does not exist. For DM2, use K; RT does not exist.


Foot Mount Plate Model FT

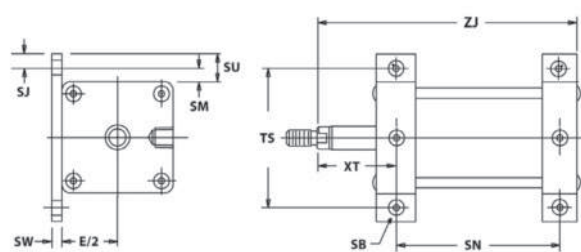


Bottom Flush Model FB

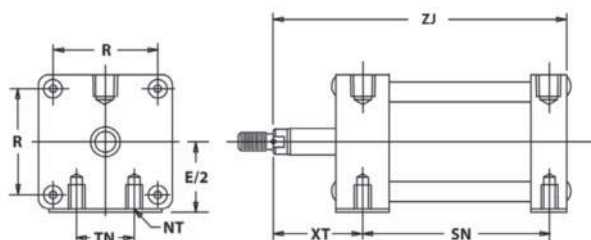


Double Rod Model DR

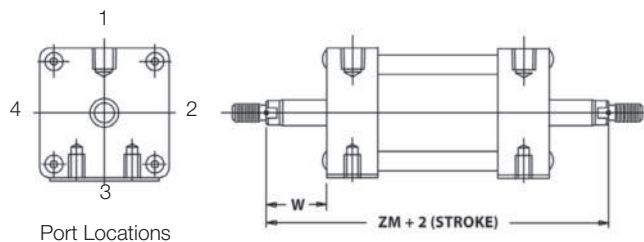


Rod End Trunnion Model TF

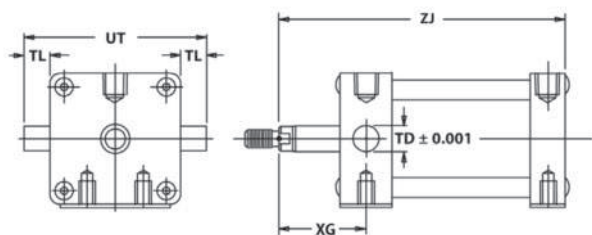


Blind End Trunnion Model TR

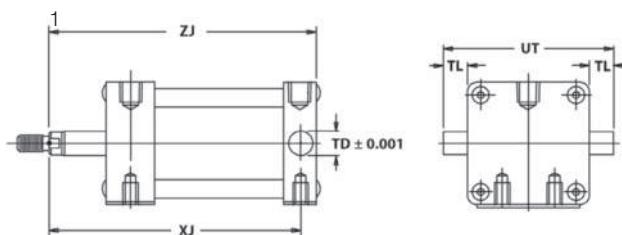


Clevis Model PB and PF

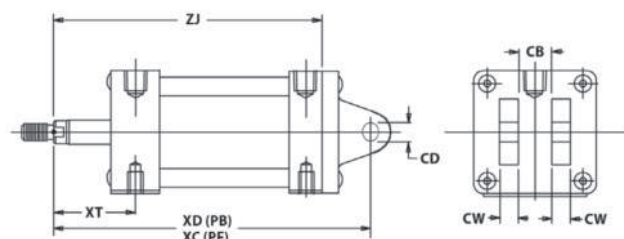


Pivot Model PE

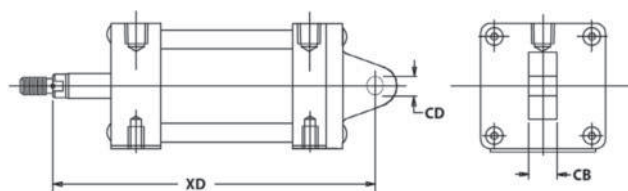

Rod End Flange Model FH*

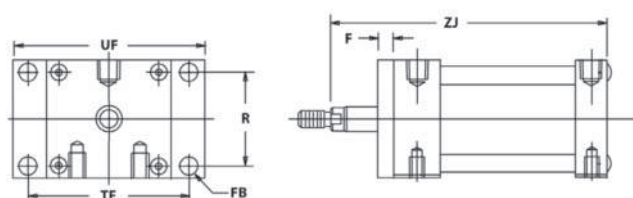

Blind End Flange Model FR*

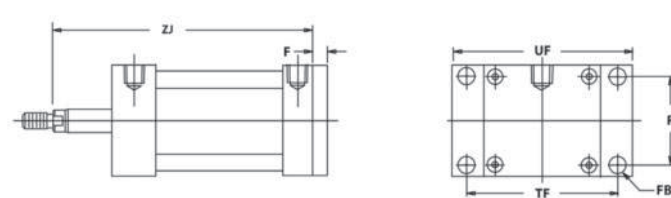

NOTE: For dimensions of nose mount and tie rod extended models, consult factory.



DM1 & DM2 Dimensions

Bore	1-1/2	2	2-1/2	3-1/4	4	6
A	3/4	3/4	3/4	1-1/8	1-1/8	1-5/8
CA	1-1/2	1-1/2	1-1/2	2-1/16	2-1/16	1
CB	3/4	3/4	3/4	1-1/4	1-1/4	1-1/2
CD	1/2	1/2	1/2	3/4	3/4	1
CE	1-1/2	1-1/2	1-1/2	2-3/8	2-3/8	3-1/8
CW	1/2	1/2	1/2	5/8	5/8	3/4
D	1/2	1/2	1/2	7/8	7/8	1-1/8
DD	17/64	23/64	23/64	7/16	7/16	1/2-20
E	2	2-1/2	3	3-3/4	4-1/2	6-1/2
EE (NPTF)	1/4	1/4	1/4	1/2	1/2	3/4
F	3/8	3/8	3/8	5/8	5/8	3/4
FB	5/16	3/8	3/8	7/16	7/16	9/16
FL	1-1/8	1-1/8	1-1/8	1-7/8	1-7/8	2-1/4 Clevis
G	1-7/16	1-7/16	1-7/16	1-11/16	1-11/16	2
J	15/16	15/16	15/16	1-3/16	1-3/16	1-1/2
K	1/8	5/32	5/32	3/16	3/16	3/16
KK	7/16-20	7/16-20	7/16-20	3/4-16	3/4-16	1-14
LD	4-1/8	4-1/8	4-1/4	4-3/4	4-3/4	5-1/2
M	1/2	1/2	1/2	3/4	3/4	2-1/4 Clevis
MM	5/8	5/8	5/8	1	1	1-3/8
NA	19/32	19/32	19/32	31/32	31/32	1-5/16
NT	1/4-20	5/16-18	3/8-16	1/2-13	1/2-13	3/4-10
R	1-7/16	1-27/32	2-3/16	2-3/4	3-21/64	4-7/8
RT	1/4-28	5/16-24	5/16-24	3/8-24	3/8-24	1/2-20
SB	17/64	21/64	25/64	33/64	33/64	33/64
SJ	3/8	3/8	3/8	1/2	1/2	11/16
SM	3/8	3/8	3/8	1/2	1/2	11/64
SU	3/4	3/4	3/4	1	1	11/64
SW	3/16	3/16	1/4	1/4	1/4	7/64
TD	1	1	1	1	1	1-3/8
TF	2-3/4	3-3/8	3-7/8	4-11/16	5-7/16	7-5/8
TK	3/8	1/2	9/16	3/4	3/4	1-1/8
TL	1	1	1	1	1	1-5/8
TN	5/8	7/8	1-1/4	1-1/2	2-1/16	3-1/4
TS	2-3/4	3-1/4	3-3/4	4-3/4	5-1/2	7-7/8
UF	3-3/8	4-1/8	4-5/8	5-1/2	6-1/4	8-5/8
UT	4	4 1/2	5	5 3/4	6 1/2	9 1/4
W	1	1	1	1-3/8	1-3/8	1-5/8
XT	1-15/16	1-15/16	1-15/16	2-7/16	2-7/16	2-13/16
XG	1 3/4	1 3/4	1 3/4	2 1/4	2-1/4	2-13/16
H	1-1/4	1-1/4	1-1/4	1-3/4	1-3/4	2-1/2
HA	2	2	2	2-5/16	2-5/16	2-15/16
HB	1/2	1/2	1/2	1/2	1/2	1/2
HC	3/4	3/4	3/4	1-1/8	1-1/8	1-5/8
HD	5/8	5/8	5/8	31/32	31/32	1-3/8
HE	1	1	1	1-1/2	1-1/2	2-1/4
SN*	2-1/4	2-1/4	2-3/8	2-5/8	2-5/8	3-1/8
XC*	5-3/8	5-3/8	5-1/2	6-7/8	6-7/8	7-7/8
XD*	5-3/4	5-3/4	5-7/8	7-1/2	7-1/2	7-1/2
XJ*	4-1/8	4-1/8	4-1/4	5	4	5-7/8
ZJ*	4-5/8	4-5/8	4-3/4	5-5/8	5-5/8	6-5/8
ZM**	6-1/8	6-1/8	6-1/4	7-1/2	7-1/2	8-3/4


NOTE: * Add Stroke Length to Dimensions Below ** Add Twice Stroke to ZM Dimension

NOTE: For Inter-Pilot® port locations, see page 27.



DME Interchangeable Rod Eye





DMC Interchangeable Rod Clevis with Pin





DMR Clevis Bracket w/Pin



DMP Pivot Bracket



Self Aligning Rod Couplers

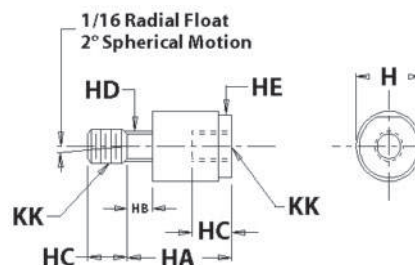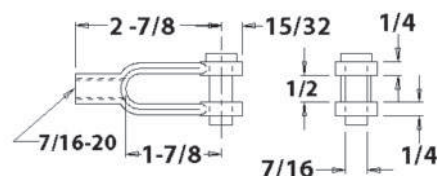DMC-1 Forged Rod Clevis w/Pin
1-1/2" through 2-1/2" bores

Cylinders For Abusive Conditions

Combining NFPA dimensional interchangeability and high quality components, the "HD1" Series offers excellent performance and long service life, even in the most severe of conditions.

External Bearing Ensures Smooth Motion

HD1 cylinders are fitted with a heavy-duty external rod bearing in the rod end head. Teflon-impregnated and hardcoat anodized, this bearing ensures smooth rod motion while maintaining rod rigidity and stability. The entire rod gland and bearing may be quickly removed and replaced without disassembling the cylinder.

Operating Specifications

Temperature Range:	-40° F to 250° F (-40° C to 121° C) (to 400° [204° C] F on request)
Lubrication:	For maximum cylinder life, non-detergent petroleum-based oil is recommended. Non-lube seals available.
Filtration:	Not essential, but a standard 40 micron filter placed upstream will prolong seal life.

Operating Parameters

Bore Diam.	Thrust*	Thrust Mult.**	Rod Diam.	Max. Oper. Pressure	
				Air	Oil †
1-1/2"	177	1.77	5/8" or 1"	250	1000
2"	314	3.14	5/8" or 1"	250	1000
2-1/2"	491	4.91	5/8" or 1"	250	1000
3-1/4"	830	8.30	1" or 1-3/8"	250	700
4"	1257	12.57	1" or 1-3/8"	250	650
6"	2827	28.27	1-3/8" or 1-3/4"	250	435

* Pushing force of cylinder at 100 PSI inlet pressure. Pulling force will be about 10% less due to the displacement of the piston rod. NOTE: Actual realizable thrust could be somewhat lower due to side loading and internal friction. It is best to oversize your cylinder by about 25% to assure smooth operation.

** To determine cylinder thrust at other inlet pressures, multiply this factor times the desired inlet pressure.

† HD1 Cylinders are not rated or approved for use in a hydraulic circuits where an impulse or pressure spike may occur.

Cylinder Construction

Rod Bearing:

Teflon-impregnated, hardcoated aluminum

Heads:

Machined from solid aluminum bar; black anodized

Tubes:

Aluminum hard anodized to 60 Rc (16 RMS finish)

Piston:

Solid high alloy aluminum and fitted with a PTFE Wear Band.

Piston Rod:

High tensile ground and polished hard chrome plated steel

Piston and Rod Seals:

Wear compensating Buna-N vee rings. Non-lube seals are also available (see Option NL).

Tube Seals:

Buna-N O-rings


Rod Wiper:

Dupont Teflon®

Tie Rods:

High tensile steel torqued to allow for flexure.

NOTE: 6" Bore Cylinders do not have wear bands. (HD)

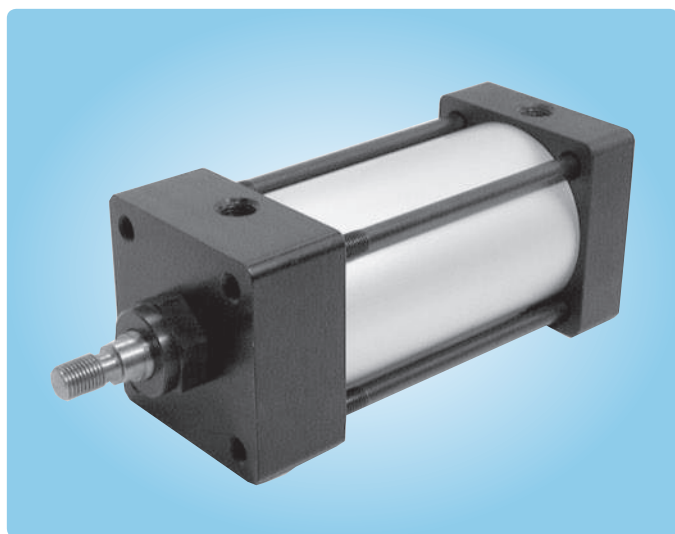

HD1 Cylinders

Customize Your Cylinder

The HD1 Series offers numerous accessories and design options. With hundreds of possible combinations available, you can "design" your own cylinder for any application.

Cushions (CR, CF, CB)

For end-of-stroke load deceleration, specify cushions in either or both ends of your cylinder. Cushions decelerate the piston rod over the last 11/16" of stroke. Adjustable, they allow you to set the degree of cushioning needed for each specific application.


A built-in check valve assures a fast getaway in the opposite direction. A pre-lubricated nitrile cushion seal provides years of reliable service.

NOTE: Cushions are not recommended on hydraulic cylinders.

Double Rod (DR)

Double rod cylinders have a common piston rod that protrudes from both ends of the cylinder. In addition to providing a dual power source, double rod cylinders serve to minimize rod deflection and to facilitate the control and adjustment of rod travel.

Inter-Pilots® (IP)




Mead's Inter-Pilot® is a miniature 3-way valve built in the cylinder head. Actuated by the cylinder's piston as it reaches the end of its stroke, the valve emits an air signal. Thus, sequencing is achieved without external limit switches and electric wiring.


Inter-Pilots may be built into either or both cylinder heads. They are not for hydraulic use. Cylinder operating pressure must not exceed pressure used to feed the Inter-Pilot®.

INTER-PILOT® PORT LOCATIONS (Port Size = 10-32): Inter-Pilot port location style that is offered with each cylinder head.


Bore (Either Head)	1-1/2"	2"	2-1/2"	3-1/4"	4"	6"
Non-Cushion	2	1	1	1	1	3
Cushion	2	1	1	1	1	3



STYLE 1



STYLE 2



STYLE 3

Non-Rotating Rod (NR)

For prevention of piston and rod rotation, an internal rod is embedded internally into both cylinder heads. This rod also passes through the piston and acts as a linear guide for the piston. NOTE: NR option available on 3-1/4", 4" and 6" bore cylinders only.

Viton™ Seals (VI)

For high temperature environments, Viton™ seals can be specified to replace standard Buna-N seals. While HD1 cylinders are normally rated to 250° F (121° C), cylinders with Viton seals are rated to 400° F (204° C).

Low Breakaway Option (NL)

For non-lube service, polyurethane seals replace standard piston and rod seals. These specially formulated seals have an inherent lubricity that provides low breakaway between the piston and tube. NOTE: NL seals are not available on hydraulic cylinders.

Magnetic Piston (MP)

If you will be using either Solid State or Reed switches for sensing rod position, you will need to order your cylinder with a magnetic piston.

Mead's Solid State and Reed switches allow the cylinder user to sense rod position anywhere within the stroke. They emit an electrical signal when the magnetized piston reaches a point opposite their location. Tie rod mounting facilitates fast and accurate position setting.

Oversized Rod (OR)

Available on all models: on the HD1-150, 200 and 250, you can order a 1" rod diameter rather than the standard 5/8" diameter; the HD1-325 and HD1-400 with a 1-3/8" rather than the standard 1"; and the HD1-600 with a 1-3/4" rather than the standard 1-3/8".

Accessories

Pneumatic Stroke Completion Sensors (SCS)

Port mounted SCS valves emit an air signal when the cylinder rod has stopped, even if the piston has not contacted the end cap. Ideal for use in situations where the full cylinder stroke is not used. See page 54.

Self Aligning Rod Couplers



Rod couplers simplify cylinder alignment problems by compensating for 2° angular error and 1/16" lateral misalignment on both extension and retraction strokes. Greater reliability is achieved by reducing cylinder and component wear. All components are heat treated for wear and corrosion resistance.

See page 26 for complete listing of Mead's self aligning rod couplers.

Flow Control Valves




Dyla-Trol® - For unprecedented smoothness in cylinder speed control, use Mead's Dyla-Trol® valves with a perfectly tapering flow. Where needle type flow controls generate turbulence as they close, Dyla-Trol® maintains an even 360 laminar flow regardless of the setting. See page 56 for more information.



Right Angle Flow Controls (RAF) - RAF flow controls feature push-in-fittings, pre-applied Teflon® based thread sealant, a recessed screw driver adjustment and convenient swivel for ease of tubing alignment. See page 62.

Order HD1 Cylinder

STEP 1:




Select a Bore Size

Bore	1-1/2"	2"	2-1/2"	3-1/2"	4"	6"
Force*	177	314	491	830	1257	2827
Model	HD1-150	HD1-200	HD1-250	HD1-325	HD1-400	HD-600

* Maximum force output (lbs.) at 100 PSI inlet pressure

STEP 2:



Choose a Stroke Length

PISTON ROD DIAMETERS:

Bore Diam.	1-1/2"	2"	2-1/2"	3-1/4"	4"	6"
Rod Diam.	5/8" or 1"	5/8" or 1"	5/8" or 1"	1" or 1-3/8"	1" or 1-3/8"	1-3/8" or 1-3/4"

Non-Standard Piston Rods: Special rod threads or extensions are available. Please enclose a sketch of what you require.

STEP 3:









SELECT A MOUNTING STYLE

		Mead Code	Bore Diameter						NFPA Code	Description
			1-1/2"	2"	2-1/2"	3-1/4"	4"	6"		
Flush Bottom/Front Rear		FB	•	•	•	•	•	•	MS-4	Four tapped holes in bottom and in both cylinder faces (front and rear). Rear sleeve nuts standard.
Long Clevis		PB	•	•	•	•	•	•	MP-2	Two ears extend from rear head (clevis is detachable).
Short Clevis		PF	•	•	•	•	•	NA	MP-1	Two ears extend from rear head (clevis is detachable).
Pivot		PE	•	•	•	•	•	NA	MP-4	A single ear extends from rear head (pivot is detachable).
Tie Rods Ext. Front		TIF	•	•	•	•	•	•	MX-3	All four tie-rods extend forward from cylinder face. Consult factory for rear extended tie-rods (or both ends).
Front Flange NFPA Std.		FH	•	•	•	•	•	•	MF-1	Flange plate extends beyond the thicker front head.
Rear Flange		FR	•	•	•	•	•	•	MF-2	Flange plate extends beyond the rear head.
Trunnion Front		TF	•	•	•	•	•	•	MT-1	Two pivot bars extend from two sides of front head. Not available with front Inter-Pilots® or front cushions.
Trunnion Rear		TR	•	•	•	•	•	•	MT-2	Two pivot bars extend from two sides of rear head. Not available with rear Inter-Pilots® or rear cushions.
Foot		FT	•	•	•	•	•	•	Non Std.	A plate with two holes is mounted to the bottom of each head.

Order HD1 Cylinders

STEP 4:

SELECT CYLINDER OPTIONS

		Mead Code	Bore Diameter						Description
			1-1/2"	2"	2-1/2"	3-1/4"	4"	6"	
Double Rod		DR	•	•	•	•	•	•	Rod extends through both heads: adds to cylinder rigidity
Oversized Rod		OR	•*	•	•	•	•	•	Standard rod is replaced by larger diameter rod.
Cushions (not available with Trunnion)		Front (CF) Rear (CR) Both (CB)	•*	•	•	•	•	•	Dampen the impact and sound that occur at stroke completion. Adjustable. NOTE: Not available on hydraulic cylinders.
Inter-Pilots® (not available with Trunnion)		Front (IPF) Rear (IPR) Both (IPB)	•*	•	•	•	•	•	Inter-Pilots® emit an air signal at the end of each stroke. Integral with cylinder head. NOTE: Not available on hydraulic cylinders.
Non-Rotating Rod (6" Max. Stroke)		NR	NA	NA	NA	•	•	•	Internal bar prevents piston and rod rotation.
Non-Lube Seals*		NL	•	•	•	•	•	•	Self-lubricating seals are used in place of standard Buna-N seals. NOTE: Not available on hydraulic cylinders.
High Temp. Seals		VI	•	•	•	•	•	•	Viton seals are suitable for high temperature environments (400° F / 204° C maximum).
Magnetic Pistons		MP	•	•	•	•	•	•	Enables Reed and Solid State switches to sense piston. NOTE: Reed/Solid State switches not available on all hydraulic cylinders. Contact Mead.

* Cushions or Inter-Pilots® are not available on the rod end head of 1-1/2" bore cylinders with oversized rod.

STEP 5:

Build A Model Number

Base Model Stroke Mounting Style Options

HD1-200 x 10 - PB - CF

2" Bore 10" Stroke Clevis Mount (PB) Cushioned Front (CF)

When ordering Dyna-Mation cylinders, list the:

1. Base Model
2. Stroke
3. Mounting Style
4. Options (If Needed)

Solid State Switches

Model CS-6200P

Sourcing

Model CS-6200N

Sinking

Cylinders must have a magnetic piston (MP). For technical information, see page 29.

Reed Switches

Model CS-6200R

Wire Leads








Cylinders must have a magnetic piston (MP). For technical information, see page 29.

Special Cylinders

We invite inquiries regarding non-standard cylinders. Please call your local Mead representative.

Toll-free 877-MEAD USA

Accessories

	Bore Diameter	Rod Size	1-1/2"	2"	2-1/2"	3-1/4"	4"	6"
	Flex Rod Couplers	STD	DMA-437	DMA-437	DMA-437	DMA-750	DMA-750	DMA-1000
		OR	DMA-750	DMA-750	DMA-750	DMA-1000	DMA-1000	DMA-1250
	Forged Rod Clevis	STD	DMC-1	DMC-1	DMC-1	NA	NA	NA
		OR	NA	NA	NA			
	Rod Clevis (NFPA Std.)	STD	DMC-2	DMC-2	DMC-2	DMC-4	DMC-4	DMC-6
		OR	DMC-4	DMC-4	DMC-4	DMC-6	DMC-6	DMC-7
	Machined Rod Eye (NFPA Std.)	STD	DME-1	DME-1	DME-1	DME-2	DME-2	DME-3
		OR	DME-2	DME-2	DME-2	DME-3	DME-3	DME-7
	Pivot Bracket Kit	ALL	HD40-150	HD20-200	HD40-250	HD40-325	HD40-400	DMP-8 Bracket Only
	Short Clevis (with pin)	ALL	HD35S-150	HD35S-200	HD35S-250	HD35S-325	HD35S-400	NA
	Clevis Bracket Mounting Kits	ALL	HD35-150	HD35-200	HD35-250	HD35-325	HD35-400	DMR-8 Bracket Only
	Long Clevis (with pin)							
Flange Mounting Kits (for front or rear flanges)		ALL	HD45-150	HD45-200	HD45-250	HD45-325	HD45-400	NA



NOTE: All Kits include mounting hardware. For DMC-1 dimensions, see page 33. For all others, see page 41.

Basic Cylinder

NFPA: MX0

Double Rod

NFPA: MDX0

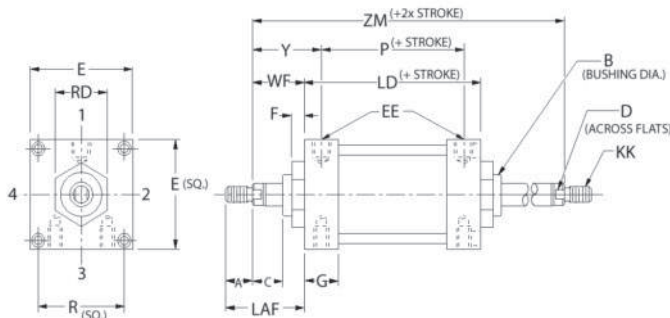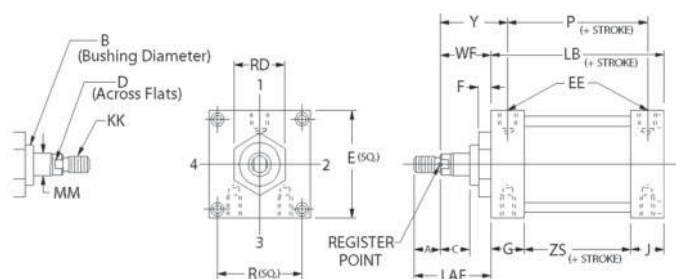


• EE Dimension is NPTF

* 6" bore HD cylinders have a rear tie rod nut, shown below as the "K" dimension. K = 7/16"

BORE	MM ROD	A	B	C	D	E	EE	F	G	J	K	KK	LAF	LB	LD	P	R	WF	Y	ZS	ZM	RD
1-1/2	5/8	3/4	1-1/8	3/8	1/2	2	1/4	3/8	1-7/16	15/16	-	7/16-20	1-3/4	3-5/8	4-1/8	2-1/4	1-7/16	1	1-15/16	1-1/4	6-1/8	1-1/8
	1	1-1/8	1-1/2	5/8	7/8							3/4-16	2-1/2					1-3/8	2-5/16		6-1/2	1-1/2
2	5/8	3/4	1-1/8	3/8	1/2	2-1/2	1/4	3/8	1-7/16	15/16	-	7/16-20	1-3/4	3-5/8	4-1/8	2-1/4	1-27/32	1	1-15/16	1-1/4	6-1/8	1-1/8
	1	1-1/8	1-1/2	5/8	7/8							3/4-16	2-1/2					1-3/8	2-5/16		6-1/2	1-1/2
2-1/2	5/8	3/4	1-1/8	3/8	1/2	3	1/4	3/8	1-7/16	15/16	-	7/16-20	1-3/4	3-3/4	4-1/4	2-3/8	2-3/16	1	1-15/16	1-3/8	6-1/4	1-1/8
	1	1-1/8	1-1/2	5/8	7/8							3/4-16	2-1/2					1-3/8	2-5/16		6-5/8	1-1/2
3-1/4	1	1-1/8	1-1/2	3/8	7/8	3-3/4	1/2	5/8	1-11/16	1-3/16	-	3/4-16	2-1/2	4-1/2	4-3/4	2-5/8	2-3/4	1-3/8	2-7/16	1-3/8	7-1/2	1-3/4
	1-3/8	1-5/8	2	1/2	1-1/8							1-14	3-1/4					1-5/8	2-11/16		7-3/4	2
4	1	1-1/8	1-1/2	1/2	7/8	4-1/2	1/2	5/8	1-11/16	1-3/16	-	3/4-16	2-1/2	4-1/2	4-3/4	2-5/8	3-21/64	1-3/8	2-7/16	1-3/8	7-1/2	1-3/4
	1-3/8	1-5/8	2	5/8	1-1/8							1-14	3-1/4					1-5/8	2-11/16		7-3/4	2
6	1-3/8	1-5/8	2	5/8	1-1/8	6-1/2	3/4	3/4	2	1-1/2	7/16	1-14	3-1/4	5	5-1/2	3-1/8	4-7/8	1-5/8	2-13/16	1-1/2	8-3/4	2
	1-3/4	2	2-3/8	3/4	1-1/2							1-1/4-12	3-7/8					1-7/8	3-1/16		9	2-3/8

Rear, Front & Bottom Tapped (FB)

NFPA: MS4


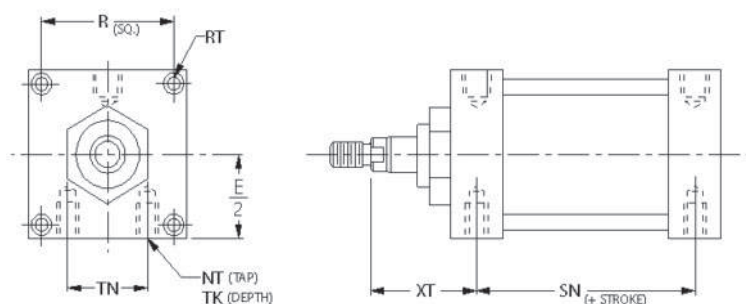


BORE	MM ROD DIA.	NT	RT	TK	TN	SN	XT
1-1/2	5/8	1/4-20	1/4-28	3/8	5/8	2-1/4	1-15/16
	1						2-1/16
2	5/8	5/16-18	5/16-24	1/2	7/8	2-1/4	1-15/16
	1						2-5/16
2-1/2	5/8	3/8-16	5/16-24	9/16	1-1/4	2-3/8	1-15/16
	1						2-5/16
3-1/4	1	1/2-13	3/8-24	3/4	1-1/2	2-5/8	2-7/16
	1-3/8						2-11/16
4	1	1/2-13	3/8-24	3/4	2-1/16	2-5/8	2-7/16
	1-3/8						2-11/16
6	1-3/8	3/4-10	1/2-20	1-1/8	3-1/4	3-1/8	2-13/16
	1-3/4						3-3/16

HD1 Dimensions



Front Flange (FH)

NFPA: MF1



Rear Flange (FR)



NFPA: MF2

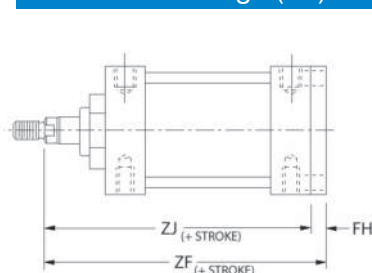

BORE	MM ROD DIA.	E	FB (BOLT)	FH	R	TF	UF	W	ZJ	ZF
1-1/2	5/8	2	5/16	3/8	1-7/16	2-3/4	3-3/8	5/8	4-5/8	5
	1							1	5	5-3/8
2	5/8	2-1/2	3/8	3/8	1-27/32	3-3/8	4-1/8	5/8	4-5/8	5
	1							1	5	5-3/8
2-1/2	5/8	3	3/8	3/8	2-3/16	3-7/8	4-5/8	5/8	4-3/4	5-1/8
	1							1	5-1/8	5-1/2
3-1/4	1	3-3/4	7/16	5/8	2-3/4	4-11/16	5-1/2	3/4	5-5/8	6-1/4
	1-3/8							1	5-7/8	6-1/2
4	1	4-1/2	7/16	5/8	3-21/64	5-7/16	6-1/4	3/4	5-5/8	6-1/4
	1-3/8							1	5-7/8	6-1/2
6	1-3/8	6-1/2	9/16	3/4	4-7/8	7-5/8	8-5/8	7/8	6-5/8	7-3/8
	1-3/4							1-1/8	6-7/8	7-5/8



Short Clevis (PF)

NFPA: MP1

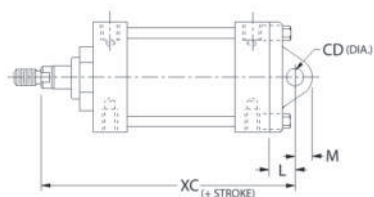


Long Clevis (PB)

NFPA: MP2

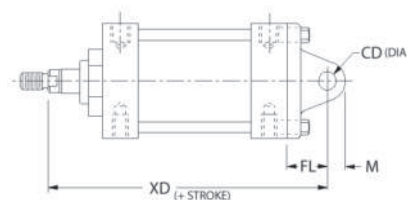

Pivot (PE)


NFPA: MP4

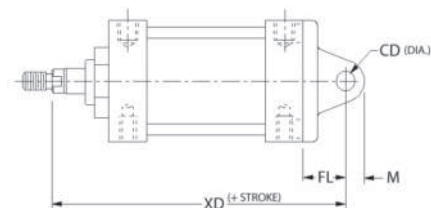

BORE	MM ROD DIA.	CB	CD	CW	FL	L	M	XC	XD
1-1/2	5/8	3/4	1/2	1/2	1-1/8	3/4	1/2	5-3/8	5-3/4
	1							5 4	6-1/8
2	5/8	3/4	1/2	1/2	1-1/8	3/4	1/2	5-3/8	5-3/4
	1							5-3/4	6-1/8
2-1/2	5/8	3/4	1/2	1/2	1-1/8	3/4	1/2	5-1/2	5-7/8
	1							5-7/8	6-1/4
3-1/4	1	1-1/4	3/4	5/8	1-7/8	1-1/4	3/4	6-7/8	7-1/2
	1-3/8							7-1/8	5-3/4
4	1	1-1/4	3/4	5/8	1-7/8	1-1/4	3/4	6-7/8	7-1/2
	1-3/8							7-1/8	7-3/4
6	1-3/8	1-1/2	1	3/4	2-1/4 Clevis	-	1-1/8 Clevis	NA	8-7/8
	1-3/4								9-1/8


Extended Tie Rods, Both Ends (TIB)

NFPA: MX1

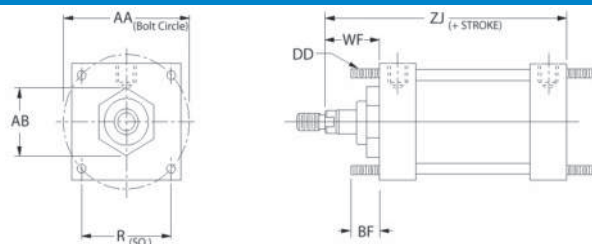


Back End (TIR)

NFPA: MX2

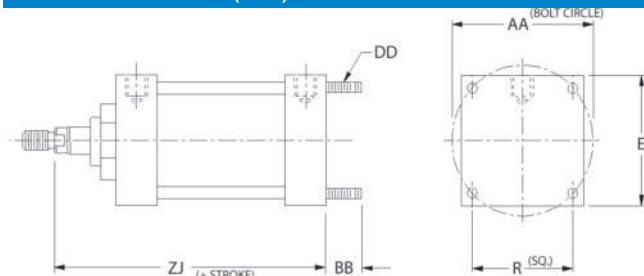

Rod End (TIF)


NFPA: MX3

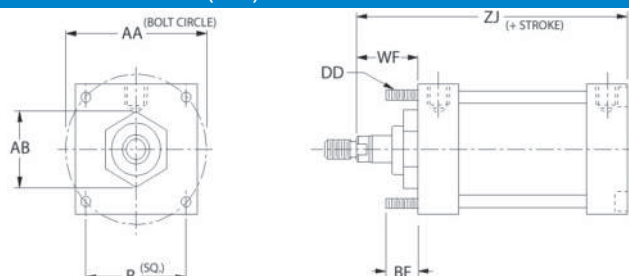

BORE	MM ROD DIA.	AA	BB	AB	BF	DD	R	ZJ
1-1/2	5/8	2.02	1	1-5/16	1-3/8	1/4-28	1-7/16	4-5/8
	1							5
2	5/8	2.6	1-1/8	1-5/16	1-1/2	5/16-24	1-27/32	4-5/8
	1							5
2-1/2	5/8	3.1	1-1/8	1-3/4	1-1/2	5/16-24	2-3/16	4-3/4
	1							5-1/8
3-1/4	1	3.9	1-3/8	2-1/32	2	3/8-24	2-3/4	5-5/8
	1-3/8							5-7/8
4	1	4.7	1-3/8	2-1/32	2	3/8-24	3-21/64	5-5/8
	1-3/8							5-7/8
6	1-3/8	6.9	1-13/16	2-5/16	2-9/16	1/2-20	4-7/8	6-5/8
	1-3/4							6-7/8


Front Trunnion (TF)

NFPA: MT1

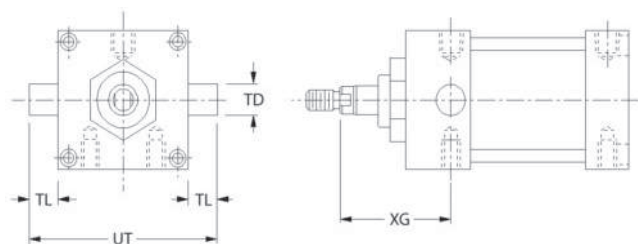

Rear Trunnion


NFPA: MT2

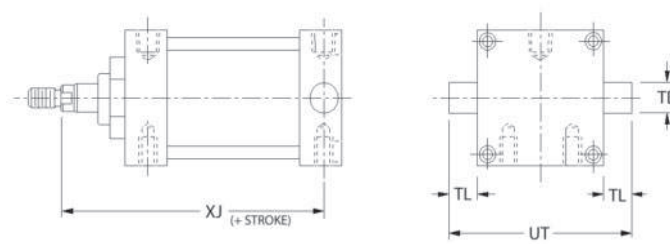


BORE	MM ROD DIA.	TD ±0.01	TL	UT	XG	XJ
1-1/2	5/8	1	1	4	1-3/4	4-1/8
	1				2-1/8	4-1/2
2	5/8	1	1	4-1/2	1-3/4	4-1/8
	1				2-1/8	4-1/2
2-1/2	5/8	1	1	5	1-3/4	4-1/4
	1				2-1/8	4-5/8
3-1/4	1	1	1	5-3/4	2-1/4	5
	1-3/8				2-1/2	5-1/4
4	1	1	1	6-1/2	2-1/4	5
	1-3/8				2-1/2	5-1/4
6	1-3/8	1-3/8	1-3/8	9-1/4	2-5/8	5-7/8
	1-3/4				2-7/8	6-1/8

HD1 Cylinder Dimensions

Clevis Bracket

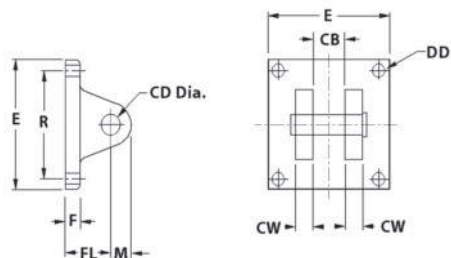


Pivot Bracket

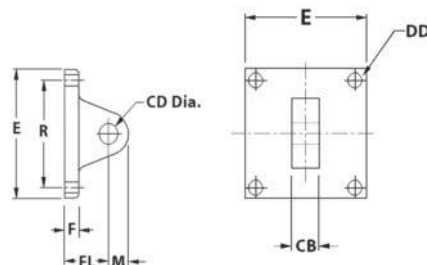


BORE	CB	CD	CW	DD	E	FL	M	R
1-1/2	3/4	1/2	1/2	17/64	2	1-1/8	1/2	1-7/16
2	3/4	1/2	1/2	23/64	2-1/2	1-1/8	1/2	1-27/32
2-1/2	3/4	1/2	1/2	23/64	3	1-1/8	1/2	2-3/16
3-1/4	1-1/4	3/4	5/8	7/16	3-3/4	1-7/8	3/4	2-3/4
4	1-1/4	3/4	5/8	7/16	4-1/2	1-7/8	3/4	3-21/64
6	1-1/2	1	3/4	17/32 Clevis	6-1/2 Clevis	2-1/4	1-1/8 Clevis	4-7/8
				21/32 Pivot	4-1/2 Pivot		1-1/4 Pivot	


Rod Clevis

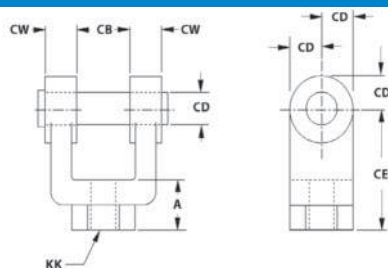

Rod Eye

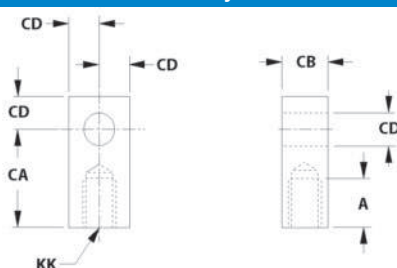

Rod Coupler

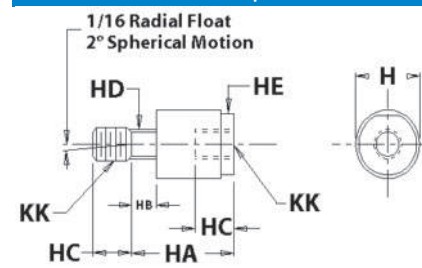

Part # Rod Clevis Rod Eye Rod Coupler	Cylinder	A	CA	CB	CD	CE	CW	KK	H	HA	HB	HC	HD	HE
DMC-2 DME-1 DMA-437	HD1-150 HD1-200 HD1-250	3/4	1-1/2	3/4	1/2	1-1/2	1/2	7/16-20	1-1/4	2	1/2	3/4	5/8	1-1/8
DMC-4 DME-2 DMA-750	HD1-150 OR HD1-200 OR HD1-250 OR HD1-325 HD1-400	1-1/8	2-1/16	1-1/4	3/4	2-3/8	5/8	3/4-16	1-3/4	2-5/16	5/16	1-1/8	31/32	1-1/2
DMC-6 DME-3 DMA-1000	HD1-325 OR HD1-400 OR HD-600	1-5/8	2-13/16	1	1	3-1/8	3/4	1-14	2-1/2	2-15/16	1/2	1-5/8	1-3/8	2-1/4
DMC-7 DME-7 DMA-1250	HD-600 OR	1-5/8	3-7/16	2	1-3/8	4-1/8	1	1 1/4-12	2-1/2	2-15/16	1/2	1-5/8	1-3/8	2-1/4

Reference

Control Valves

Cylinders

Specialty Valves

Production Devices

Accessories

Index

Large Bore Cylinders for Abusive Conditions

Combining NFPA dimensional interchangeability and high quality components, the HD Large Bore Series offers excellent performance and long service life, even in the most severe of conditions. Mead offers 5", 8", 10" and 12" bore sizes to meet your needs.

Bore Diam.	Thrust*	Thrust Mult.**	Rod Diam.	Max. Operating Pressure Air
5"	1964	19.64	1" or 1-3/8"	250 PSI
8"	5027	50.27	1-3/8" or 1-3/4"	200 PSI
10"	7854	78.54	1-3/4" or 2"	200 PSI
12"	11310	113.1	2" or 2-1/2"	200 PSI


*Pushing force of cylinder at 100 PSI inlet pressure. Pulling force will be about 10% less due to the displacement of the piston rod. (Use 15% when Oversized Rods are chosen.) NOTE: Actual realizable thrust could be somewhat lower due to side loading and internal friction. It is best to oversize your cylinder by about 25% to assure smooth operation.

**To determine cylinder thrust at other inlet pressures, multiply this factor times the desired inlet pressure.


†HD Cylinders are not rated or approved for use in a hydraulic circuits where an impulse or pressure spike may occur.

Dimensions


Bottom Flush Model FB

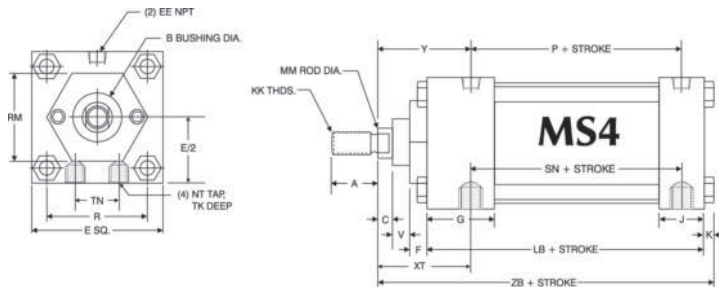


Rod End Flange Model FH (5" Bore Only)

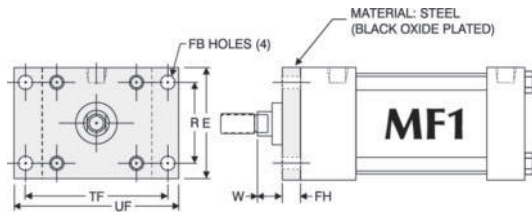

Double Rod Model DR

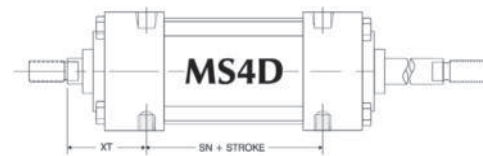

Blind End Flange Model FR (5" Bore Only)

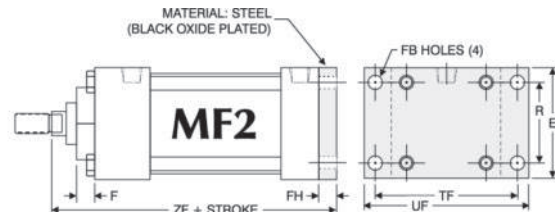

Bore	Rod Dia.	A	AA	B	BB	C	CB	CD	CW	DD	E	EE	F	FB	FH	FL	G	J	K	KK	L	LB	M	MM	NT	P	R	RM	SB
5	1 STD	1.13		1.50	1.81	.50	1.25	.75	.63	.50-20	5.50	.50	.63	.56	.63	1.88	1.75	1.25	.44	.75-16	1.25	4.50	.88	1	.63-11	3	4.10	2.75	.81
	1.38 OR	1.63	5.8	2	2.31	.63														1-14				1.38				3.50	
8	1.38 STD	1.63		2	2.31	.63	1.50	1	.75	.63-18	8.50	.75	.63	.69	.63	NA	2	1.50	.56	1-14	1.50	5.13	1	1.38	.75-10	3.38	6.44	3.50	.81
	1.75 OR	2	9.1	2.38	2.69	.75														1.25-12				1.75					
10	1.75 STD	2		2.38	2.69	.75	2	1.38	1	.75-16	10.6	1	.63	.81	.63	NA	2.25	2	.69	1.25-12	2.13	6.38	1.38	1.75	1-8	4.31	7.92	3.50	-
	2 OR	2.25	11.2	2.63	2.69	.88							.75	.75	.75					1.50-12				2				5	
12	2 STD	2.25		2.63	2.69	.88	2.50	1.75	1.25	.75-16	12.75	1	.75	.81	.75	NA	2.25	2	.69	1.50-12	2.25	6.88	1.75	2	1-8	4.81	9.40	5	-
	2.50 OR	3	13.3	3.13	2.69	1														1.88-12				2.50					

HD Large Bore Tie Rod

How To Order

HD-800 x 10 - FB - DR

Base Model

HD-500 (5" Bore)
 HD-800 (8" Bore)
 HD-1000 (10" Bore)
 HD-1200 (12" Bore)







Stroke

State Fractional Strokes as decimals (i.e. 10.5)


Mounting

	Description	NFPA Code	Restrictions
FB	Four tapped holes in bottom	MS-4	None
FH	Flange Plate extends beyond front head	MF-1	None
FR	Flange Plate extends beyond rear head	MF-2	None
FT	Lugs extend from bottom of head	MS-2	None
PB	Two Ears extend from rear head	MP-1	12" not available
PF	Two Ears extend from rear head (detachable)	MP-2	None
TIF	Four Tie Rods extend forward	MX-3	None
TF	Pivot bars extend from two sides of front head	MT-1	None
TR	Pivot bars extend from two sides of rear head	MT-2	None


Options

DR		Double Rod
VI		Viton Seals
CF		Front Cushions
CR		Rear Cushions
CB		Cushions Both Ends
MP		Magnetic Piston


Foot Mount Model FT

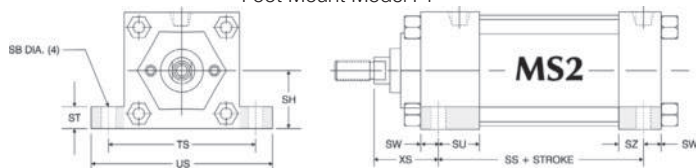


Clevis Mount Model PF

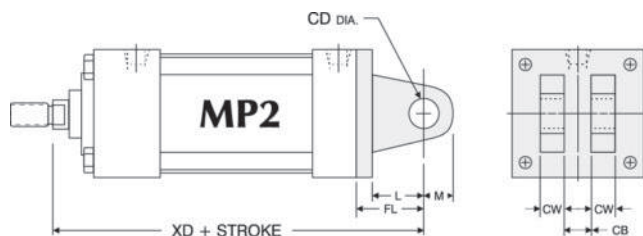


Clevis Mount Model PB

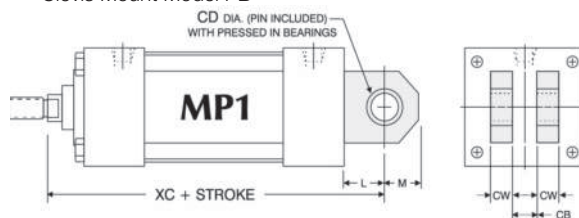


Tie Rods Extended Front Model TIF

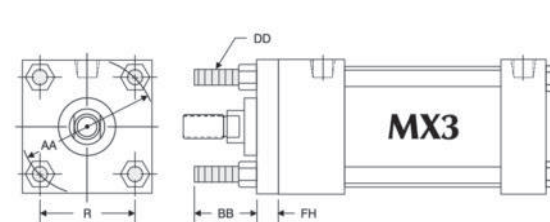

Trunnion Front Mount Model TF

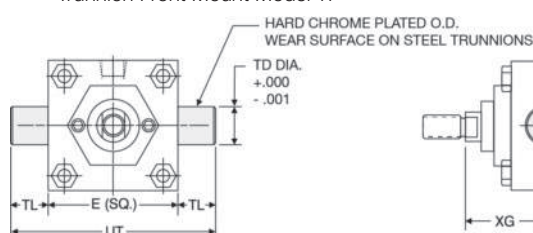


Trunnion Rear Mount Model TR

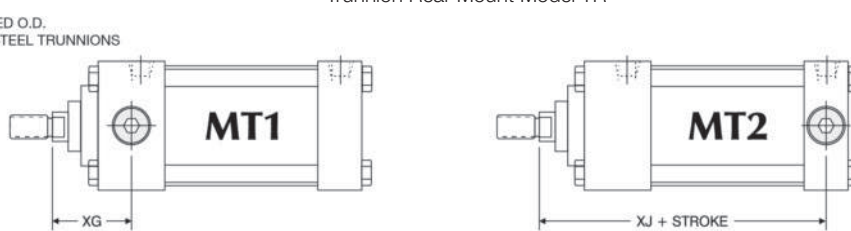

NOTE: Consult factory for additional mounting options.

Bore	Rod Dia.	SH	SN	SS	ST	SU	SW	SZ	TD	TE	TF	TK	TL	TN	TS	UF	UM	US	UT	V	W	XC	XD	XG	XJ	XS	XT	Y	ZB	ZF
5	1 STD	2.75	2.88	3.73	1	1.06	.69	.56	1	-	6.63	1	1	2.69	6.88	7.63	8.25	8.25	7.50	.25	.75	7.13	7.75	2.25	5.25	2.06	2.44	2.38	6.31	6.50
	1.38 OR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.38	1	7.38	8	2.50	5.50	2.31	2.69	2.63	6.56	6.75
8	1.38 STD	4.25	3.25	3.75	1	1.31	.69	.81	1.38	7.57	NA	1.13	1.38	4.50	9.88	NA	12.50	11.25	11.25	.38	1.63	8.25	NA	2.63	6	2.31	2.81	2.75	7.31	6.75
	1.75 OR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.50	1.88	8.50	NA	2.88	6.25	5.56	3.06	3	7.56	7
10	1.75 STD	-	4.13	-	-	-	-	-	9.40	NA	1.50	-	5.50	-	NA	-	-	-	-	.50	1.88	10.38	NA	-	-	-	3.13	3.06	8.94	8.25
	2 OR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.38	2	10.50	NA	-	-	-	3.25	3.19	9.06	8.38
12	2 STD	-	4.63	-	-	-	-	-	11.1	NA	1.50	-	7.25	-	NA	-	-	-	-	.38	2	11.13	NA	-	-	-	3.25	3.19	9.56	8.88
	2.50 OR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	.50	2.25	11.38	NA	-	-	-	3.50	3.44	9.81	9.13

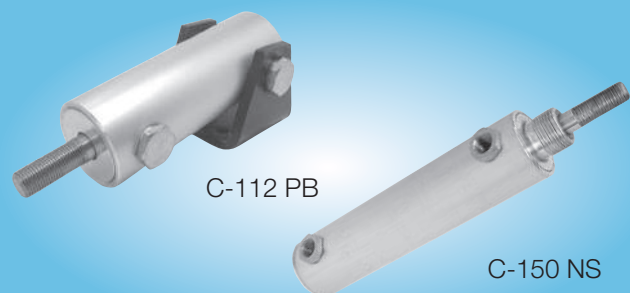

C-112 PB


C-150 NS

Low Cost Mounting







The flush bottom cylinder mounts directly onto a base plate with only two bolts... no need for mounting brackets or other hardware. The pivot bracket is built-in for easy pivoting at the inlet axis. The bracket pivots within the cylinder length to save space and to eliminate one entire bracket that would be needed to mount other cylinders.

Because Centaur's trunnions serve both as mounts and as assembly elements, they cost less than any other trunnion mount on the market.

Flush Bottom (FB)



Pivot Bracket (PB)

Trunnion Rear (TR)
Trunnion Front (TF)Flush Front (FF)
1-1/2", 2", 2-1/2" & 3" bores onlyFlush Rear (FR)
1-1/8" bore onlyFlush Rear (FR)
1-1/2", 2", 2-1/2" & 3" bores onlyPivot Extended (PE)
1-1/8", 1-1/2" & 2" bores onlyThreaded Nose (NS)
Std. on all 1-1/8" bore mounts
1-1/8", 1-1/2" & 2" bores only

Technical Specifications

Pressure:	150 PSI Air, 250 PSI Hydraulic
Bore Sizes:	1-1/8", 1-1/2", 2", 2-1/2" and 3"
Body:	Hard Coated Aluminum
Rod Bearing:	Oil Impregnated Porous Bronze
Temperature Range:	-40° F to 250° F (-40° C to 121° C) (to 400° F [204° C] on request)


Economical & Repairable

Mead Centaur cylinders are built to match tie-rod performance, but are up to 45% less expensive and offer lubrication-free service. Centaur cylinders are not permanently crimped like most other round cylinders, so they can be disassembled for maintenance.

Teflon Seals Create Smooth Breakaway


Centaur's unique Teflon® piston seal eliminates the forward lurch that occurs when rubber seals breakaway from the cylinder tube surface. Rod motion remains smooth throughout the stroke.

Non-Lube



During the cylinder break-in period, molecules from the unique graphite-filled Teflon® piston seal became embedded in the pores of the hard coated aluminum cylinder tube. This forms a long-lasting, super-smooth, self-lubricated surface.

Built-In Bumpers Absorb Impact



Rubber bumpers are built into each cylinder head to eliminate the metallic "clank" that occurs at stroke completion.

Self Aligning Rod Couplers




Rod couplers simplify cylinder alignment problems by compensating for 2° angular error and 1/16" lateral misalignment on both extension and retraction strokes.

See page 26 for complete listing of Mead's self-aligning rod couplers.

Model	C-112	C-150	C-200	C-250	C-300
Rod Coupler	DMA-312	DMA-500	DMA-625	DMA-750	DMA-1000

Proximity Switches





Solid State and Reed switches can sense rod position anywhere within the stroke. A stainless steel clamp facilitates mounting at any location along the cylinder tube. Switches may be used singly or in multiples and positioned at any point around the cylinder tube. The cylinder must have a magnetic piston. For technical information, see page 29.

Model	C-112	C-150	C-200	C-250	C-300
Sinking	N/A	CS-6100N-150	CS-6100N-200	CS-6100N-250	CS-6100N-300
Sourcing	N/A	CS-6100P-150	CS-6100P-200	CS-6100P-250	CS-6100P-300
Reed	N/A	CS-6100R-150	CS-6100R-200	CS-6100R-250	CS-6100R-300

Centaur Dimensions and Ordering Information






Basic Dimensions

Hall Effect

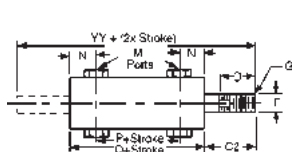




Flush Bottom (FB)

Pivot Bracket (PB)

Pivot Extended (PE)
1-1/8", 1-1/2" & 2"
bores onlyFlush Rear (FR)
1-1/8" bore onlyFlush Rear (FR)
1-1/2", 2", 2-1/2" & 3"
bores onlyFlush Front (FF)
1-1/2", 2", 2-1/2" & 3"
bores onlyThreaded Nose (NS)
Std. on all 1 1/8" bore mounts
1-1/8", 1-1/2" & 2" bores only

Trunnion Rear (TR)

Trunnion Front (TF)



	Bore Sizes				
	1-1/8"	1-1/2"	2"	2-1/2"	3"
A	1-3/8	1-3/4	2-1/4	2-3/4	3-1/4
B	5/8	13/16	13/16	-	-
C1	5/8	1-5/8	1-7/8	-	-
C2	-	1-7/16	1-11/16	1-3/4	2-1/16
D	1/2	1-1/4	1-1/2	1-1/2	1-3/4
F	5/16	1/2	5/8	3/4	1
G	5/16-24	1/2-20	5/8-18	3/4-16	1-14
H	3/4-16	1-14	1 1/4-12	-	-
L	2-3/32	2-1/8	2-5/8	3-1/8	3-5/8
M	1/8 NPT*	1/4 NPSF	1/4 NPSF	1/4 NPSF	1/4 NPSF
N	7/16	51/64	51/64	51/64	51/64
P+Stroke	1-21/64	1-27/32	1-59/64	2-3/64	2-11/64
Q+Stroke	2-13/64	3-7/16	3-1/2	3-5/8	3-3/4
R	10-32	3/8-24	3/8-24	3/8-24	3/8-24
Y	5/8	15/16	1-1/8	-	-
Z	3/8	11/16	3/4	-	-
AB	1/4	3/8	1/2	-	-
AC	3/8	9/16	5/8	-	-
AD	5/8	1	1-1/4	-	-
AE	-	1-1/8	1-1/2	1-3/4	2
AH	-	1/2	5/8	3/4	7/8
AJ	-	1/4-28	5/16-24	3/8-24	1/2-20
AK	1-5/8	2-1/4	2-1/4	2-7/8	3-1/8
AL	1-1/4	1-5/8	1-5/8	2-1/8	2-3/8
AN	1-3/4	2-13/32	2-29/32	3-13/32	3-29/32
AP	1	1-1/8	1-5/8	2-1/8	2-5/8
AQ	13/64	9/32	9/32	9/32	9/32
AR	31/32	1-9/16	1-13/16	1-15/16	2-5/16
AT	.418	.731	.731	.731	.731
AV	2-5/32	3-5/8	4-1/8	4-5/8	5-1/8
AW	2-17/64	2-13/16	3-5/16	3-13/16	4-5/16
YY (2 X STK)	4-23/32	6-5/16	6-7/8	7-1/8	7-1/8

* 1-1/8 bore model with trunnion mounts has 1/4-28 ports.



Accessories

Rod Clevis w/Pin (CEC)

Nose Nuts (CN)
1-1/8", 1-1/2" & 2"
bores only

1-1/8" & 1-1/2" bores

2" & 3" bores



NOTE: For DMC-4, refer to pages 41.

Rod Clevis Accessory Dimensions

Bore	E	CA	CB	CE	DD
1-1/8"	-	19/64	11/32	13/16	5/16
1-1/2"	-	15/32	9/16	1-13/16	1/2
2"	1-1/4	7/16	5/8	2-1/16	1/2
2-1/2"	1-1/2	3/4	1-1/4	2-3/8	3/4
3"	1-1/4	7/16	5/8	2-1/16	1/2

Model Numbers

Bore Sizes Accessory	1-1/8"	1-1/2"	2"	2-1/2"	3"
Rod Clevis, Pin	CEC-112	CEC-150	CEC-200	DMC-4	CEC-300
Nose Nut	CN-112	CN-150	CN-200	-	-

Air Reservoirs

Two Centaur rear heads and a tube form an economical air tank. Consult factory for more information. Simply add AR to model.

Ordering Information

When ordering Centaur cylinders, list the model number, stroke length and mounting option(s) required. Please consult the factory for stainless steel rods, air reservoirs or any special cylinder need.

C-112 X 4 - NS
 1-1/8" Bore
 4" Stroke
 Threaded Nose Mount


Bore Model	1-1/8" C-112	1-1/2" C-150	2" C-200	2-1/2" C-250	3" C-300
Nose Mount (NS)	•	•	•	NA	NA
Flush Bottom (FB)	•	•	•	•	•
Flush Front (FF)	NA	•	•	•	•
Flush Rear (FR)	•	•	•	•	•
Pivot Bracket (PB)	•	•	•	•	•
Pivot Extended (PE)	•	•	•	NA	NA
Trunnion Front (TF)	•	•	•	•	•
Trunnion Rear (TR)	•	•	•	•	•
Other Options:	•	•	•	•	•
Double Rod (DR)	Δ	•	•	•	•
Dupont Viton Seals (VI)	•	•	•	•	•
Magnetic Piston (MP)	NA	•	•	•	•
Air Reservoir (AR)	•	•	•	•	•

Δ Nose (NS) mounts standard on both ends of 1 1/8" bore model with double rod.

Installation and Operation




Proximity switches provide contactless switching capabilities and allow you to sense cylinder rod position practically anywhere within the stroke. Switches are easily mounted on any point along the cylinder body. The switch will provide an electrical signal when subjected to the magnetic field created by a cylinder piston that is specially fitted with a captivated magnet.

Switch	Compatible with
CS-6100	Centaur Round Body Cylinders
CS-6200	DM1 and HD1 Tie Rod Cylinders
CS-7500	DM2 Extruded Body Cylinders

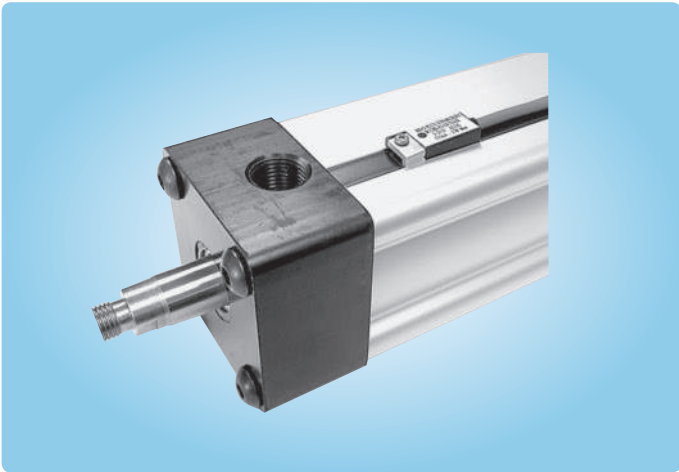

Model Number	Switch Type	Switching Logic	Operating Voltage	Switching Current	Switching Power	Switching Drop	Magnetic Sensitivity
CS-7500R	Reed Switch	Normally Open SPST	5~20 VDC/ VAC 50/60Hz	1 Amp. Max.	30 Watts Max.	3.5 V Max.	85 Gauss
CS-6100R							
CS-6200R							
CS-7500P							
CS-6100P	Solid State (MR) Sensor	Normally Open	5~28 VDC	1 Amp. Max.	24 Watts Max.	1.5 V Max. (0.5 Amp)	85 Gauss
CS-6200P							
CS-7500N							
CS-6100N							
CS-6200N							

Connection Diagrams

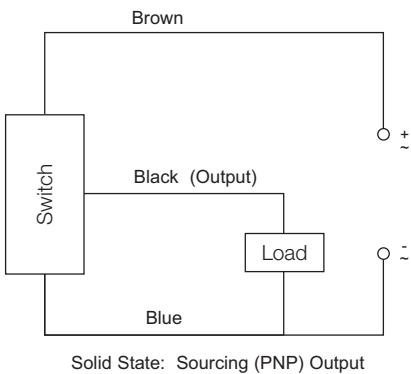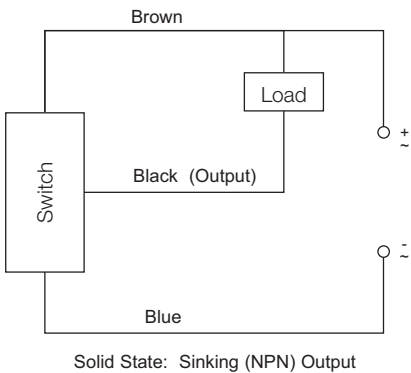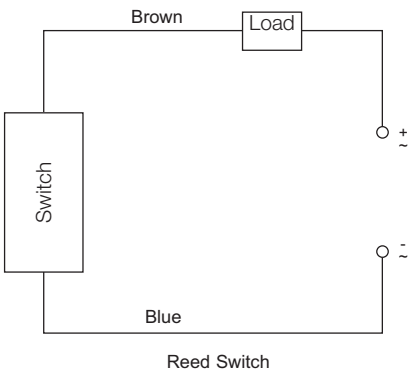

Space Saver



Offers A Wide Range Of Power

Bore	3/4"	1-1/8"	1-1/2"	2"	2-1/2"	3"	4"
Force @ 100 PSI (lbs)	44	100	177	314	491	707	1257


NOTE: Pull force is approximately 10% less.

Mounting Options

Uniform base thickness makes mounting easy regardless of stroke.

Perfect for Tooling

Space Saver cylinders are ideal for use on drill fixtures and other automated tooling to provide compact, lightweight holding power.



Valving

Efficient 4-way LTV valves, shown on pages 20-21, are perfect as actuators of Space Saver cylinders. Valve hookup is made easy because the top cylinder port reindexes to any position.


Full Power in Half the Space

Space Saver cylinders provide the power and stroke of standard cylinders in less than half the space. They are ideally suited for use in machinery where space and weight are at a premium. Best of all, Space Saver cylinders cost up to 50% less than standard models.

Built to Last

- Oil impregnated sintered bronze rod bearing and hard chrome plated piston rod work together to prolong cylinder life.
- Hard coated cylinder bore eliminates cylinder wall scoring.

Dimensions

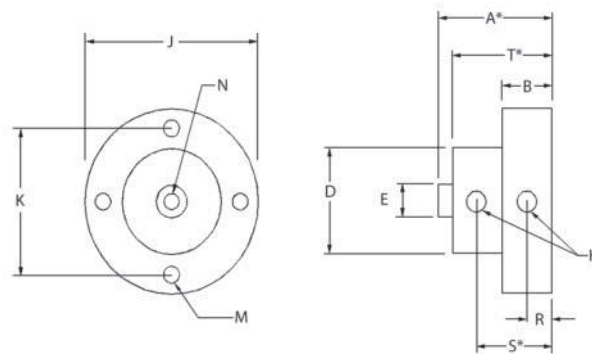

NOTE: 3/4" - 2" Bore Models have two (2) Mounting Holes. See Dimension M.

Bore	3/4"	1 1/8"	1 1/2"	2"	2 1/2"	3"	4"
A*	49/64	25/32	59/64	1-1/16	1-5/64	1-25/64	1-17/32
B	1/2	1/2	1/2	9/16	9/16	3/4	3/4
D	1	1-3/8	1-3/4	2-1/4	2-3/4	3-1/4	4-1/4
E	5/16	1/2	1/2	5/8	5/8	3/4	3/4
H	10-32	10-32	10-32	1/8 NPT	1/8 NPT	1/8 NPT	1/8 NPT
J	1-3/4	2-1/8	2-1/2	3-1/8	3-3/4	4-1/4	5-1/4
K	1-13/32	1-25/32	2-5/32	2-23/32	3-1/4	3-25/32	4-25/32
M	13/64 (2)	3/64 (2)	13/64 (2)	13/64 (2)	17/64 (4)	17/64 (4)	17/64 (4)
N	10-32 x 1/4	5/16-24 x 3/8	5/16-24 x 3/8	3/8-24 x 3/8	3/8-24 x 3/8	1/2-20 x 1/2	1/2-20 x 1/2
R	5/32	5/32	5/32	5/16	5/16	21/64	21/64
S*	25/64	25/64	1/2	11/16	11/16	59/64	1-3/64
T*	3/4	49/64	57/64	1-3/64	1-1/16	1-23/64	1-1/2

* Plus Stroke

NOTE: To obtain a 1/8" or 3/16" stroke on 3/4" or 1-1/8" bore models, a 1/4" stroke cylinder is used and spacers are added.

Stroke Availability

Model	Bore	Stroke Lengths											
		1/8	3/16	1/4	3/8	1/2	5/8	3/4	1	1-1/2	2	2-1/2	3
SS-075	3/4"	X*	-	X*	X	X	X	X	X	X	X	-	-
SS-112	1-1/8"	X*	X*	X*	-	X	-	X	X	X	X	X	X
SS-150	1-1/2"	X*	-	X	-	X	-	X	X	X	X	X	X
SS-200	2"	X	-	X	-	X	-	X	X	X	X	X	X
22-250	2-1/2"	X	-	X	-	X	-	X	X	X	X	X	X
SS-300	3"	X	-	X	-	X	-	X	X	X	X	X	X
SS-400	4"	X	-	X	-	X	-	X	X	X	X	X	X

* Includes special fitting

NOTE: To obtain a 1/8" or 3/16" stroke on 3/4" or 1-1/8" bore models, a 1/4" stroke cylinder is used and spacers are added.

Non-standard strokes subject to special machining charge.

Specifications


Pressure:	0-150 PSI, Air only
Temperature:	-40° F to 250° F (-40° C to 121° C) (to 400° F [204° C] with Viton)
Lubrication:	Petroleum base oil
Filtration:	40 Micron minimum
Seals:	Buna-N

Options & Ordering Information

When ordering, specify model number, stroke length, and Viton seal option if required.

Example: SS-150 X 0.25 - FB-VI

Miniature Air Cylinders

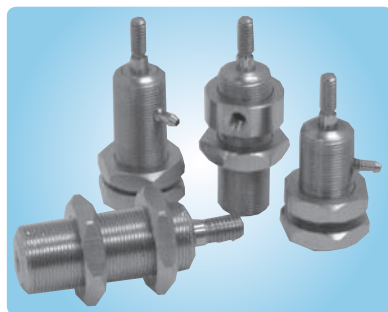

MA Series - Mini Adjustable Location Cylinders


These threaded body cylinders install quickly and easily without special mounting devices. Either drill a hole, insert your cylinder, and position with the pair of jam nuts or tap a hole and lock into position with a single jam nut. The MA-Series cylinders are electroless nickel plated for excellent corrosion resistance and a gleaming appearance.

Non-rotating: This option is available on 3/8" and 1/2" bore, single-acting, spring return cylinders.


Stroke Length Availability - MA Series

The MA-250 (1/4" Bore) single acting is only available in 1/4" stroke lengths. The MA-250 double acting is available in 1/4", 1/2" and 1" stroke lengths. The MA-375 (3/8" Bore) and MA-500 (1/2" Bore) single acting is available in 1/4" and 1/2"; the double acting version is available in 1/4", 1/2", 1", 1 1/2" and 2" stroke lengths. By adding a spacer, all models are also available in fractional stroke lengths for no additional charge. (Dimensionally the cylinder will be the same as the next closest size up.) If other strokes are required, contact Mead to quote a custom stroke length.



MA Cylinder Dimensions



Basic Cylinder



Spring Extend Only

6-32 Barbs
(for use with 1/16" ID Hose)

Side and Rear Tapped

Bore	A=Stroke+	B	C	D	E	F	I	J	K	M	N
1/4"	0.81	.15	.62	3/8-32	.14	6-32	.31	.06	.62	.20	.10
3/8"	1.00	.18	.75	1/2-32	.17	8-32	.31	.21	.75	.37	.18
1/2"	1.06	.18	.87	5/8-32	.25	1/4-28	.31	.21	.87	.37	-

Ordering Miniature Cylinders:

Family MA - 500 x 1.00 DA - R B (***)
 MA = Mini Adjustable
 MF = Mini Flat

Bore 250 = 1/4" Bore
 375 = 3/8" Bore
 500 = 1/2" Bore

Stroke (in inches) See "Stroke Length Availability..." for particular series

Type DA = Double Acting
 SR = Spring Return
 SE = Spring Extended

Options
 V = Viton Seals
 NR = Non-Rotating (Hex Rod) (MA Series only)

Front Port
 O = None (Spring Return)
 S = Side Tapped (10-32)
 B = 6-32 Barb (for 1/16" ID Hose)


Rear Port
 O = None (Spring Extend)
 R = Rear Tapped (10-32)
 S = Side Tapped (10-32)*
 B = 6-32 Barb (for 1/16" ID Hose)

* Special Order (non-stock; contact factory)

Accessories

Fitting: 10-32 to 1/16" ID HosePMHF
 Fitting: 6-32 Barb to 1/16" ID HosePMBF
 Hex Nut for 1/4" Bore CylinderPMH-250
 Hex Nut for 3/8" Bore CylinderPMH-375
 Hex Nut for 1/2" Bore CylinderPMH-500
 1/16" ID Tube Clear Polyurethane (50 ft.)11NAT

Mounting Blocks




Bore	PMB 250 1/4"	PMB 375 3/8"	PMB 500 1/2"
Width	0.503	0.626	0.75
Height	0.879	0.876	0.94
Depth	0.314	0.314	0.38
Hole (2)	0.14	0.139	0.136

Miniature Air Cylinders

Mini Cylinders Mount Anywhere!

Mead's line of miniature air cylinders offers users a wide range of low-profile linear actuators. These versatile cylinders are available in both single-acting and double-acting models. They are ideal actuators in any application where space is limited.

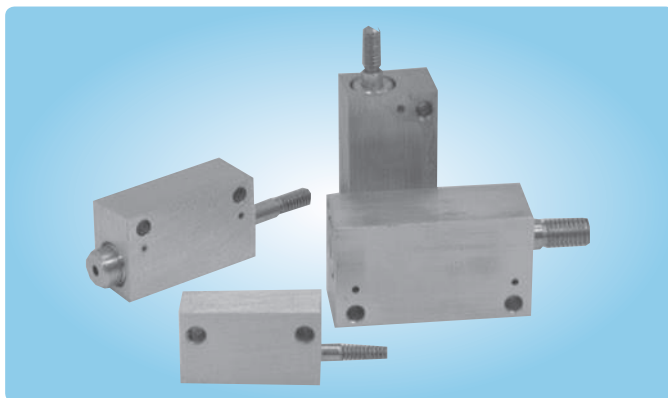

Stroke Length Availability - MF Series

This series is available in 1/4" and 1/2" standard stroke lengths.* By adding a spacer, all models are also available in fractional stroke lengths for no additional charge. (Dimensionally the cylinder will be the same as the next closest size up.) If other strokes are required, contact Mead to quote a custom stroke length.

*NOTE: The MF-250 (1/4" bore), Single Acting (SR or SE) is only available in 1/4" standard stroke length.

MF Cylinder Dimensions

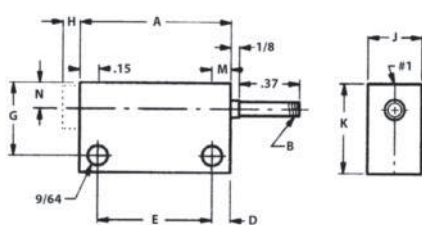



Figure 1:
For strokes up to 1/2"

1
Indicates port locations. The H dimension is for spring extend cylinders only.

When nominal forces are adequate, this table may be helpful.

Typical Spring Forces			
Spring Return		Spring Extend	
250 - 1/4" stroke	14-18 ozs.	250 - 1/4" stroke	25-29 ozs.
375 - 1/4" stroke	22-26 ozs.	375 - 1/4" stroke	30-34 ozs.
375 - 1/2" stroke	22-26 ozs.	375 - 1/2" stroke	54-58 ozs.
500 - 1/4" stroke	42-46 ozs.	500 - 1/4" stroke	62-66 ozs.
500 - 1/2" stroke	51-55 ozs.	500 - 1/2" stroke	78-80 ozs.

Bore	Stroke	A	B	D	E	G	H	I	J	K	M	N	O	Front Port	Rear Port
1/4"	1/4"	1.06	6-32	.12	0.81	7/16"	.10	.31	3/8"	5/8"	.20	.18	5/16"	6-32	10-32
	1/2"	1.31	6-32	.12	1.06	7/16"	-	.31	3/8"	5/8"	.20	.18	5/16"	Barb	Tap
3/8"	1/4"	1.25	8-32	.15	0.93	5/8"	.18	.37	1/2"	3/4"	.37	.25	7/16"	10-32	10-32
	1/2"	1.50	8-32	.15	1.18	5/8"	.18	.37	1/2"	3/4"	.37	.25	7/16"	Tap	Tap
1/2"	1/4"	1.31	1/4-28	.15	1.00	3/4"	-	.37	5/8"	7/8"	.37	.31	9/16"	10-32	10-32
	1/2"	1.56	1/4-28	.15	1.25	3/4"	-	.37	5/8"	7/8"	.37	.31	9/16"	Tap	Tap




Dimensions For Cylinders With Strokes Over 1/2"

Bore	A ₁	A ₂
1/4"	1.06	0.81 + Stroke
3/8"	1.25	1.00 + Stroke
1/2"	1.31	1.06 + Stroke


Figure 2: For strokes over 1/2"




V0X01



H-1

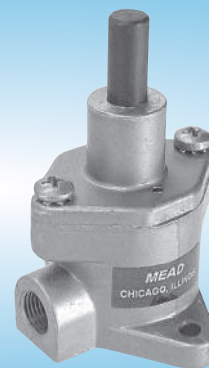

V-1

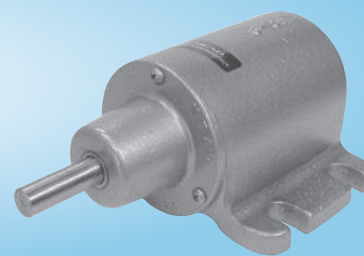

H-43

Economical single-acting air clamps provide gripping power on the out stroke and spring retraction. They are ideal for use in drill fixtures and for bending, swaging, forming, crimping, and pressing operations. Because 3-way valves may be used, hook-ups are quick and easy.

Adjustable Stroke Models

H0X01, H1X12, V0X01, and V1X12 models are supplied with an adjustable front head so that the user may adjust the length of the stroke by as much as one inch.

Specifications

Pressure: Air to 150 PSI

Temperature: -40° F to 250° F (-40° C to 121° C)

Rod Material: Nitrotec plated steel on 1" bore models, ground and polished on all others.

Seals: Custom molded one-piece neoprene cups

Body & Cover: Aluminum on adjustable models, cast aluminum on all other models. Cast iron on H-12 and H-283.

Lubrication: Petroleum base oil

Filtration: 40 Micron minimum

Models	Return‡	Bore(")	Stroke(")	Output*
H-1 & V-1	4	1	11/16	68
H0X01 & V0X01	5	1	0 to 1	62
H1X12 & V1X12	5	1	1 to 2	61
H-41 & V-41	9	2-1/4	1	361
H-42	10	2-1/4	2	353
H-43	11	2-1/4	3	351
H-71	18	3	1	682
H-72	13	3	2	675
H-73	14	3	3	679
H-12	39	4	2	1206
H-122	27	4	2-5/8	1204
H-283	40	6	3	2763


‡ Maximum weight in pounds that spring will return.

* Force in pounds at 100 PSI input pressure with maximum spring resistance.

Contact factory for threaded ports.


	H-1	H0X-01	H1X-12	H-41	H-71
A	2-25/32	4	5	4-7/8	5-5/16
B	1-11/32	Var.		2-1/4	2-3/4
C	5/8	Var.		1-1/2	1-7/16
D	5/16	5/16		1/2	3/4
G	1-1/4	1-9/16		3-1/16	3-23/32
J	1/8 NPTF	1/8 NPTF		1/8 NPTF	1/4 NPTF
K	3/16	.200		1/2 Slot	21/64
L	1-5/8	1-5/8		3 1/2	4-5/8
M	2	2-1/8		4-7/16	5-3/8
Q	5/8	13/16		1-9/16	1-15/16

Single Side Lug




	V-1	V0X-01	V1X-12	V-41
A	2-5/8	3-13/16	4-13/16	4-5/8
B	1-15/16	Var.		3-3/16
C	11/16	Var.		1-7/16
D	5/16	5/16		1/2
G	1-9/16	1-3/4		3
J	1/8 NPTF	1/8 NPTF		1/8 NPTF
K	3/16	.200		.257
L	1-11/16	1-5/8		3-3/4
M	2-1/8	2		4-1/4

Base Mount

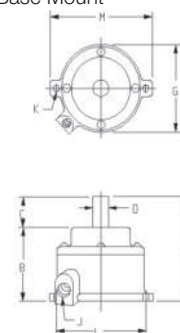


	H-43	H-72	H-73	H-12	H-283
A	7-1/4	6-5/16	7-5/16	7	9
B	2-3/4	2-3/16	2-3/16	2-9/16	3-1/2
C	1-7/16	1-7/16	1-7/16	1-7/16	1-7/16
D	1/2	3/4	3/4	3/4	1-1/4
G	3-1/16	3-11/16	3-11/16	5-1/16	7-1/16
H	2	2-1/16	3-1/16	2-5/16	7-1/16
J	1/8 NPTF	1/4 NPTF	1/4 NPTF	3/8 NPTF	1/2 NPTF
K	1/2 Slot	21/64	21/64	1/2 Slot	1/2-13
L	4	4-5/8	4-5/8	5-1/2	5-5/8
M	5-1/8	5-1/4	5-1/4	7	6-3/4
Q	1-9/16	1-7/8	1-7/8	2-9/16	3-9/16

Double Side Lug



	H-42	H-122
A	5-13/16	7-9/16
B	2-5/8	2-5/8
C	1-7/16	1-7/16
D	1/2	3/4
G	3-1/16	4-31/32
H	-	2-1/2
J	1/8 NPTF	3/8 NPTF
K	1/4-20	5/16-18
L	2-1/4	2-1/4
M	3	4-13/16
Q	1-9/16	2-9/16

Bottom Flush



Lockout and Easy-Glide Ball Handle Valves

Slide/Lockout Valve


Mead's Slide/Lockout Valves (SLV) are designed to comply with OSHA Standard Rule 29 CFR1910.147. SLVs exhaust downstream air to atmosphere when the valve is in the closed position. This prohibits the unexpected cycling of equipment due to stored energy in the air line. These valves can only be locked in the closed position, rendering any downstream machinery or equipment completely inoperable. The aluminum sleeve is anodized bright gold for easy identification.

Put a Lock on Plant Accidents

In the open position, air flows freely through the valve to downstream equipment or tool.



In the closed position, air from compressor side is restricted while exhaust air bleeds to atmosphere, rendering downstream equipment inoperable. Lockout is only possible in the closed position.

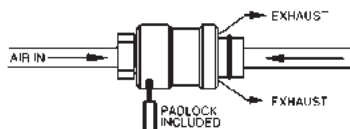

"Gang Lock" Option

SLVs may be ordered with a gang lock adapter rather than the standard Mead padlock. The adapter permits the use of one or multiple standard padlocks. To order, add a "G" to the model (i.e. SLVG-50).

OSHA Rule 29 CFR1910.147*

To protect employees from the unexpected energization or release of stored energy during repair, maintenance and associated activities, this standard requires potentially hazardous energy sources for certain equipment to be disabled and either be locked or labeled with a warning tag to prevent unauthorized start-up of these machines or equipment.

*Copies of the actual OSHA standard may be obtained from the U.S. Department of Labor, Occupational Safety and Health Administration, Office of Publications, Room N3101, Washington, D.C. 20210.




SLV-37

Specifications	
Temperature Range:	-50° F to 180° F (-46° C to 82° C)
Pressure Range:	0 to 150 PSI
Material:	
Body:	Black Anodized Aluminum
Sleeve:	Gold Anodized Aluminum
Retaining Ring:	Steel
O-Rings:	Buna-N
Lock:	Solid Brass (Steel Shackle)

Warning: SLVs are not to be used for lockout of hydraulic fluid.

Dimensions

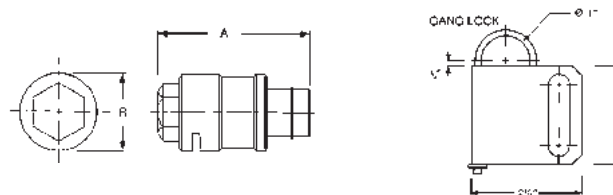

Ordering Information

Model	Model (with Gang Lock)	Port Size	C _v	A (in.)	B (in.)
SLV-25	SLVG-25	1/4" NPT	0.94	2-9/16"	1-1/4"
SLV-37	SLVG-37	3/8" NPT	2.00	2-15/16"	1-7/16"
SLV-50	SLVG-50	1/2" NPT	3.18	3-11/32"	1-5/8"


NOTE: Use part #LCK100 to order replacement lock and key set.
Use part #2028002 to order replacement gang lock.

Easy Glide Ball Handle Valves (MHL SERIES)



MHL-3/MHL-4

General Specifications	
Flow:	0.14 C _v
Ports:	1/8" NPT
Temperature Range:	-40° F to 250° F (-40° C to 121° C)
Lubrication:	SAE 10
Pressure Range:	0 to 150 PSI (Air Only)
Seals:	Buna-N

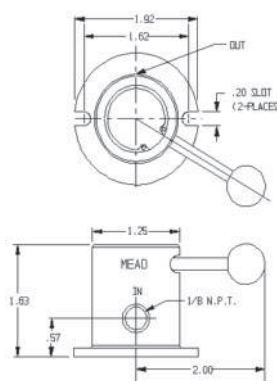

Low Friction Motion

MHL valves provide either 3-way pilot control (MHL-3) or 4-way directional control (MHL-4). To operate MHL valves, simply move the ball handle across the slot on the valve body. The handle rotates a precision-lapped disc to control the directional flow of air. The hardcoat anodized aluminum disc allows virtually effortless handle motion. The handle will hold in any position. Air exhausts through the disc and out to atmosphere.

Low Friction Motion

Base mount holes make mounting and removal quick and easy. Further, MHL valves are easy to disassemble. By simply removing the ball handle and snap ring, any part worn by use can be found and replaced.

General Purpose 2 and 3-Way Mini Solenoid Valves




Dyna-Coil valves are used when you need to convert an electrical signal into a flow of air. 2-way models allow air to flow through the valve when energized. 3-way models allow air to flow through the valve when energized and exhaust when de-energized.

Normally closed means inlet air is blocked until the valve is energized. Normally open means inlet air flows through the valve and is blocked when energized.


General Specifications	
Media:	Air (Max. Temperature 185° F / 85° C)
Pressure:	Vacuum to 120 PSI
Orifice:	0.038"
Conduit:	1/2" NPS
Response:	20-30 ms
Base:	Aluminum
Mounting Holes (2):	8-32 UNC-2B Threads
Lubrication:	None Required
Filtration:	40 Micron Minimum

Basic Dimensions

1/8" and 1/4" CSC Models




1/8" and 1/4" USC Models



Model	Ports	Style	Exhaust	Voltage	Cv (In)	Cv (Exh)	A	B	C	D	E	F	G
MB12-2CSC	1/8" NPT	2-Way NC	None	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	-	2-5/16	1-3/8	1-27/32	1-3/16	1	9/32	.738
MB25-2CSC	1/4" NPT	2-Way NC	None	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	-	2-3/8	1-1/2	1-27/32	1-3/16	1-3/16	5/16	29/32
MB12-3CSC	1/8" NPT	3-Way NC	Free to Atmos.	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	.050	2-5/16	1-3/8	1-27/32	1-3/16	1	9/32	.738
MB12-3USC*	1/8" NPT	3-Way NC, NO	Piped	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	.050	2-23/32	1-3/8	1-27/32	1-3/16	1	9/32	.738
MB25-3CSC	1/4" NPT	3-Way NC	Free to Atmos.	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	.050	2-3/8	1-1/2	1-27/32	1-3/16	1-3/16	5/16	29/32
MB25-3USC*	1/4" NPT	3-Way NC, NO	Piped	24 VAC, 120 VAC, 240 VAC, 12 VDC, 24 VDC	.035	.050	2-27/32	1-1/2	1-27/32	1-3/16	1-3/16	5/16	29/32


*Valve can be piped either normally closed (NC) or normally open (NO).

NOTE: All models consume 7 watts of power. Lead wires measure 16" in length.

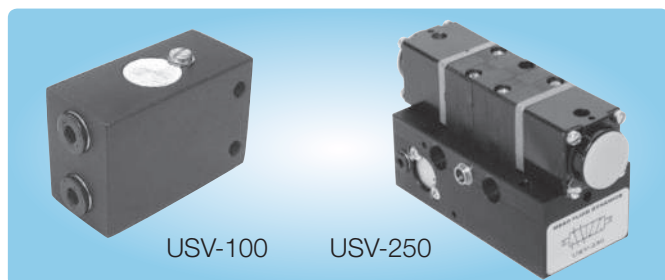


Binary Valves

The USV-100 provides alternating outputs from a single input port. The valve has two outputs which are selected alternately by applying a pulsing, on-off air signal to the input port. USV-100 will not function properly with a sustained signal.




USV-100 Dimensions

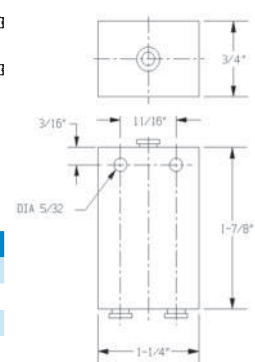

When pressure is applied to port 1, it flows through the valve to provide an output at port 2. When the pressure is released from port 1, the valve changes over so that when pressure is next applied at port 1, air flows out through port 3. Release of the pressure again changes the valve back to its original position. Therefore, each time pressure is applied and released to port 1, outputs 2 and 3 change over. NOTE: The air signal must be fully exhausted to enable the valve to change over properly.

Power models (USV-250) provide the same binary function as the 100 model but, in addition, offer full 4-way control power. They are suitable for direct connection to double-acting air cylinders. The USV-250 features a positive feed back from the outputs, eliminating incorrect sequential operation caused by poor signal performance.

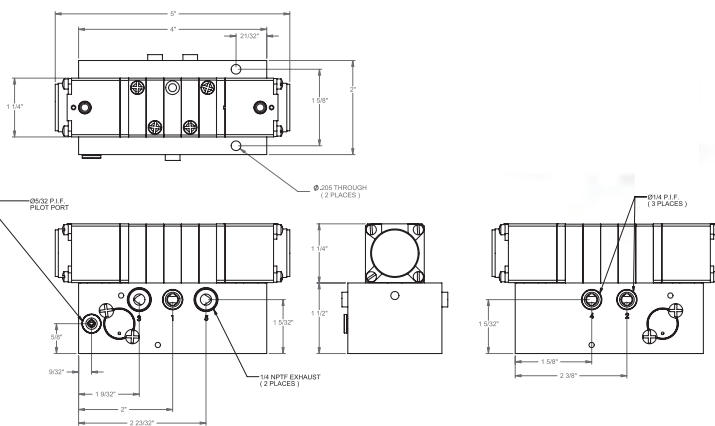

Technical Specification	100 Model	250 Model
Operating Pressure	35-100 PSI	35-100 PSI
Flow to atmosphere	4 SCFM @ 100 PSI	36.9 SCFM @ 100 PSI
Permissible Mediums	Air and Inert Gas	Air and Inert Gas
Ambient Temp. Range	10° F to 120° F (-12° C to 49° C)	10° F to 120° F (-12° C to 49° C)
Lubrication	Recommended	Not Necessary
Flow	.12 C _v	0.75 C _v

Air Timers and Impulse Relay Valves

Air Timers Delay Signal

Air timers are used to delay the air signal coming in or out of an air component. Depending on the model, the delay may be adjusted from 0.75 to 60 seconds. Input port is indicated by a yellow dot.

Timers are available in either normally closed (NC) or normally open (NO) models. Normally closed models are used to time in and normally open models are used to time out. Once set, timers are accurate for repeatability to 10% with regulated air pressure.




General Specifications	
Filtration:	40 Micron filtration recommended
Lubrication:	30 wt. non-detergent oil
Pressure Range:	50-150 PSI (NC); 40-150 (NO)
Mounting:	(2) 11/64 clearance holes
Life Expectancy:	1,000,000 cycles
Temperature Range:	50° F to 120° F (10° C to 49° C)
Port Sizes/Material:	1/8" / Acrylic

Model Number		Range	Ports	Length	Width	Height
NC	NO					
KLC-101	KLH-101	0-1 sec.	1/8"	4"	1"	1-1/2"
KLC-105	KLH-105	0.75-6 sec.	1/8"	4"	1"	1-1/2"
KLC-110	KLH-110	1-11 sec.	1/8"	4"	1"	1-1/2"
KLC-212	KLH-212	15 sec-2 min.	1/8"	4 7/8"	1 7/8"	1-1/2"
KLC-230	KLH-230	2-30 sec.	1/8"	4 7/8"	1 1/2"	1-7/8"
KLC-260	KLH-260	10-60 sec.	1/8"	4 7/8"	1 7/8"	1-1/2"


NOTE: NC timers have a green spool; NO timers have a red spool. For specific timers, consult factory.

Timing In (Normally Closed) Circuit

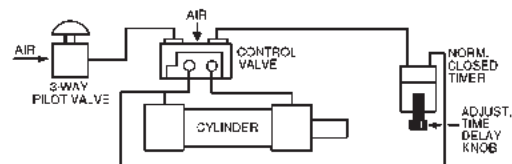


In this circuit, the 3-way valve is actuated and air is sent to the control valve. The control valve shifts, sending air through port A to the cylinder, which extends. Air also flows to the timer where it begins to time to the pre-setting. Once reached, the timer opens, allowing the air to flow through to the control valve's other pilot port, shifting the valve back. Air flows through port B, retracting the cylinder.

Timing Out (Normally Open) Circuit

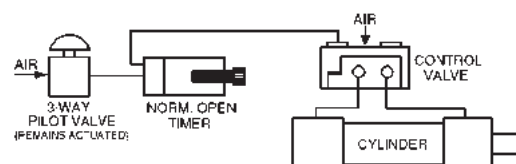


When the 3-way valve is actuated, air flows through the NO timer to the control valve. The 3-way valve remains actuated. The control valve shifts, sending air through port A to the cylinder, which extends. At the same time, the timer begins to time to the pre-setting. Once reached, the timer closes, blocking off the air flow to the control valve, which spring returns. Air flows through port B, retracting the cylinder.

Sample Circuit Using 414B (Pressure Type)

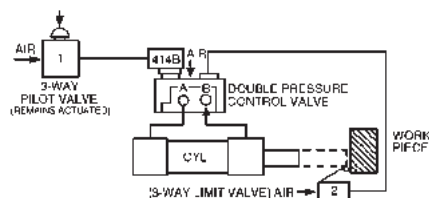


When actuated, the 3-way valve sends a signal to 414B, which emits a signal to the control valve. The 3-way valve remains actuated. The valve shifts, allowing air to flow through port A, extending the cylinder. 414B senses the back pressure caused by the shifted valve, closes, and exhausts. Since the signal from valve #1 is blocked by the closed 414B, valve #2 (when actuated) shifts the control valve back. Air flows through port B, retracting the cylinder.

Sample Circuit Using 415B (Bleed Type)

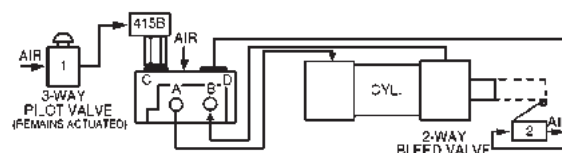

Air enters a double bleed piloted valve, flows through ports C and D, and is blocked by the 415B relay and valve #2. When actuated, the 3-way valve #1 sends an air signal to the 415B. The 3-way valve remains actuated, 415B exhausts, shifting the control valve and extending the cylinder. The 415B senses the back pressure from the shifted valve and closes, blocking off the air flow from valve #1. This allows valve #2 (when actuated) to bleed air, allowing the control valve to shift. Air flows through port B, retracting the cylinder.

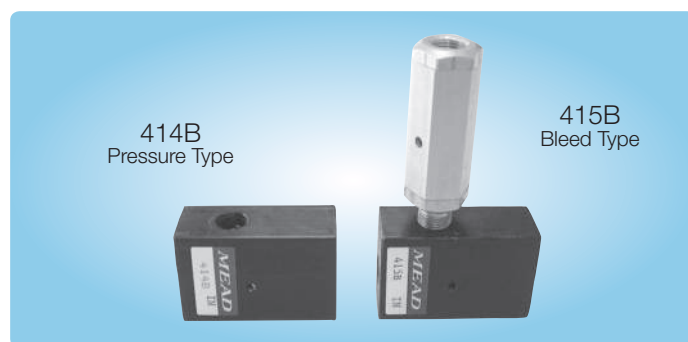


Pneumatic Impulse Relay Valves

Impulse relay valves allow you to shift a double-pressure piloted or double bleed piloted valve, even though there are overlapping pilot signals. Relay valves convert a sustained air flow from a three-way pilot valve into a momentary pulse or bleed, which shifts a control valve and then closes.

General Specifications	
Mounting:	Mounts directly to control valve with nipple fitting
Body Construction:	Aluminum
Pressure Range:	35 to 125 PSI
Lubrication:	10 wt. non-detergent oil

NOTE: Required inlet pressure must be delivered all at once.

Model Number	Ports	Type	Length	Width	Height
414B	1/8" NPTF	Pressure	1-59/64"	3/4"	1-1/4"
415B	1/8" NPTF	Bleed	1-59/64"	3/4"	3-11/16"

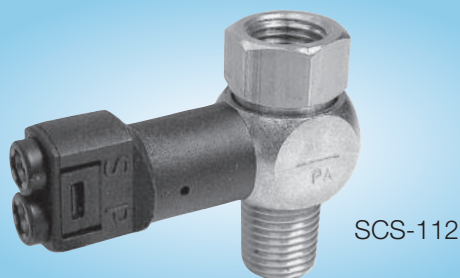


SCS-112

Pneumatic Stroke Completion Sensors

Stroke Completion Sensors (SCS) mount directly on cylinder ports to provide an air signal when rod motion stops, even when the full stroke length is not used. Stroke completion sensors automatically adjust to variable strokes, replacing limit and reed switches in clamping, holding and sequencing tasks.

Sensors work by comparing supply pressure to exhaust pressure. Once the pressure drops on the exhaust side of the cylinder, the sensor will emit an air signal. Stroke completion sensors are not recommended for cylinder "inching" operations with pressure held valves.

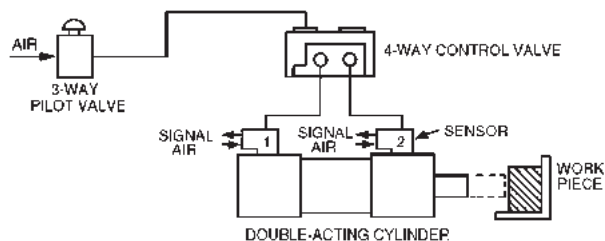

In this sample circuit, sensor #1 provides an air signal when the cylinder rod is retracted. When the four-way control valve shifts, air flows to the cylinder, which extends. This causes sensor #1 to shut off. The cylinder rod stops when it reaches the work piece or end of stroke, causing sensor #2 to emit an air signal. This air signal may be used to actuate another valve or for sequencing operations.


When using a flow control valve in conjunction with a stroke completion sensor, place the flow control valve between the control valve and the sensor.

Specifications & Dimensions

Model Number	Mtg. Thread	Pilot Tubing	Pressure Range	Length	Width	Height
SCS-112	1/8" NPT	5/32" OD	60 to 120 PSI	2 3/16"	29/32"	1"
SCS-250	1/4" NPT	5/32" OD	60 to 120 PSI	2 3/16"	29/32"	1"
SCS-375	3/8" NPT	5/32" OD	60 to 120 PSI	2 3/4"	1 17/64"	1 1/16"
SCS-500	1/2" NPT	5/32" OD	60 to 120 PSI	2 3/4"	1 17/64"	1 1/16"

Temperature Range 5° F to 140° F

Dimensions

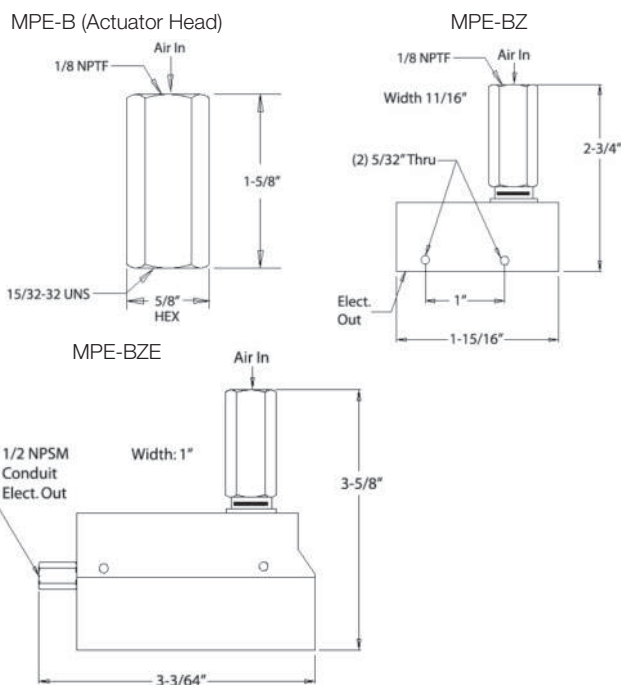

Specifications

Model Number	Description
MPE-B	Actuator Head Only
MPE-BZ	Actuator Head and Switch, 15 Amp
MPE-BZE	Actuator Head, Switch and Enclosure, 15 Amp

Air to Electric Switches

Air to electric switches convert air signals into electrical signals, which is ideal for actuating solenoid power valves or other electric components. Switches may be wired normally closed or normally open.

Actuator head model MPE-B may be easily mounted on any plunger-type switch; operating range is 8 PSI (minimum) to 100 PSI (maximum) and is not adjustable to a specific pressure.

Switch models MPE-BZ and MPE-BZE are single pole double throw (SPDT), have a 15 amp capacity for normal, low resistance electrical circuits and are UL and CSA listed. Solder terminals accept up to #14 wire.

Dash / Panel Mount Control Valves

Unactuated



ACV-R25

Actuated



ACV-R25-SR

Ideal for Mobile Equipment Applications

2-position ACV valves can be used for four-way directional control or as a three-way pilot valve. Its function indicator has been designed directly into the control knob and is visible only when the valve is in the energized or open position. In the unoperated (closed) position, the indicator ring is concealed within the knob assembly.

ACV features an optional interlock reset port which can be used to automatically return the valve to the closed position. Designed for mobile equipment operations to avoid stall conditions, the interlock feature is used to ensure that the PTO cannot be operated while the vehicle is in motion.

Air or Electric Reset

The reset port can be connected to the handbrake line to force valve "shutoff" whenever the handbrake is released. This would prevent the simultaneous consumption of energy from auxiliary equipment and the moving vehicle, a situation likely to result in a stall condition or equipment damage. On electrical interlock models, removing the electrical supply will force shutoff.

ACVs are rear ported to simplify dashboard or panel mounting. All mountings are supplied with integral push-in fittings (for 6mm or 1/4" tube). Simply push the tube directly into the valve.

How To Order

Family Category

ACV = Air Control Valve

Knob Color

R = Red
B = Black
G = Green

Port Size

25 = 1/4"
6M = 6mm

ACV - R 25 - AR - B


Solenoid

A = 12 VDC
B = 24 VDC


Feature

AR = Air Released
AP = Air Applied
SR = Solenoid with Air Released

Sample Hook-Up To Mobile PTO System

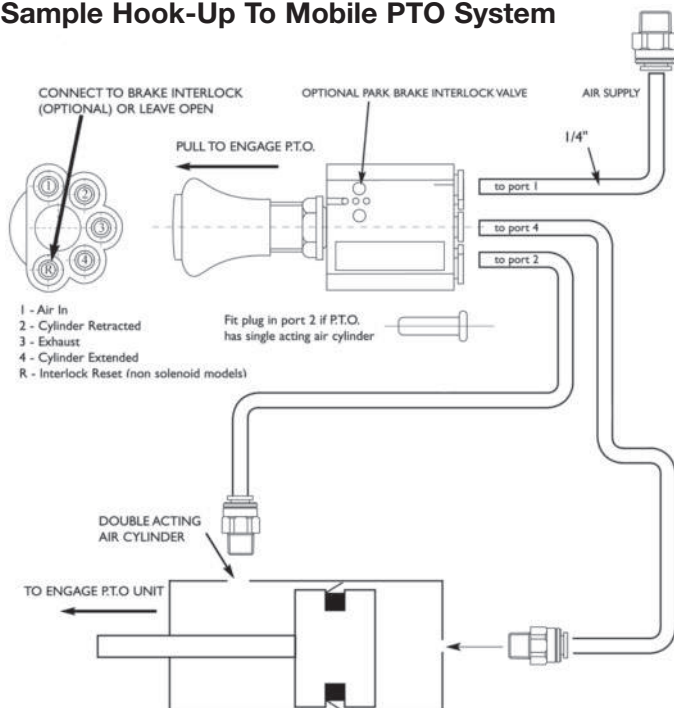

Dimensions 1/4" Models

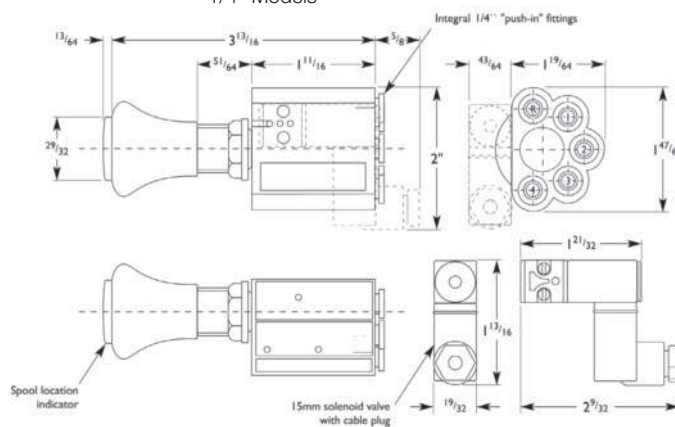


General Specifications

Media:	Air to 145 PSI (10 Bar)
Min. Pressure to Reset Port:	35 PSI
Flow (5/32" models):	0.053 C _v
Flow (1/4" models):	0.12 C _v
Neck Diameter for Panel Mounting:	11/16"
Body:	Plastic
Spool:	Brass
Fittings:	Brass and Plastic
Seals:	PTFE-filled Nitrile
Temperature:	-4° F to 122° F (-20° C to 50° C)
Cycle Life:	>15 Million



Smooth Laminar Flow

The unique construction of Dyla-Trol® assures a perfectly tapering flow. This unprecedented smoothness is made possible by the “iris” type orifice mechanism. Where needle-type flow controls generate turbulence as they close, Dyla-Trol® maintains an even 360° laminar flow regardless of the setting.

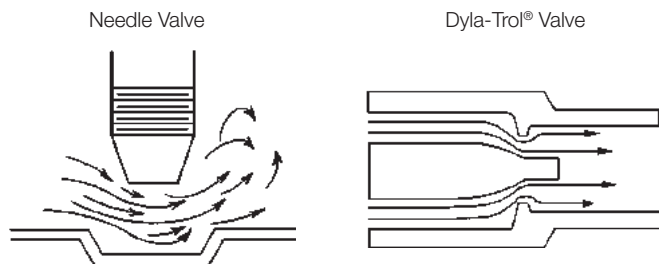

High Repeatability

The fast-acting check mechanism in each free flow model responds to very slight changes in pressure. This guarantees fast resetting and dependable repeatability with each cycle.

Models and Specifications

Flow Direction	MF1-02	MF1-04	MF1-06	MF1-08	MF1-12	MF1-25	MF1-37	MF1-50
Max. Pressure in PSI	250 Air 250 Oil	250 Air 250 Oil	250 Air 250 Oil	250 Air 250 Oil	250 Air 1000 Oil	250 Air 1000 Oil	250 Air 1000 Oil	250 Air 1000 Oil
Max. Flow @ 100 PSI	8 CFM $C_v = 0.1$	7 CFM $C_v = 0.1$	7 CFM $C_v = 0.1$	7 CFM $C_v = 0.1$	47 CFM $C_v = 0.8$	66 CFM $C_v = 1.2$	149 CFM $C_v = 2.6$	173 CFM $C_v = 3.1$
Body	Brass	Brass	Brass	Brass	Aluminum	Aluminum	Aluminum	Aluminum
Length	1-1/4"	2-1/2"	2-7/16"	2-1/2"	2"	2-1/2"	2-7/8"	3-1/4"


Precise-Metering Flow Control

Fine tune the speed of your cylinders with precise-metering Dyla-Trol® valves. No other flow control provides such accurate control of cylinder motion.

For best results, locate flow control valves right on the cylinder ports with the “free flow” direction pointing toward the cylinder. Air exhausting from the cylinder will then be metered. Controlling air entering the cylinder produces a less smooth motion.

NOTE: While Dyla-Trol® are most often used to adjust cylinder speed, they are ideal for use wherever air or oil flow is to be controlled.

Typical Cylinder Hook-Up

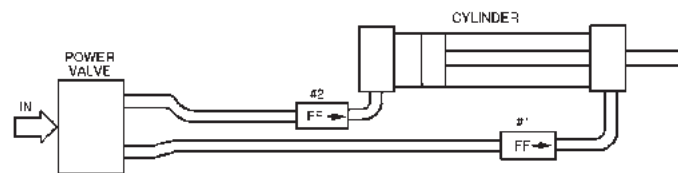

In this circuit, flow control #1 controls the outward movement of the cylinder rod and flow control #2 controls the return speed.

Compact Inline Design

The convenient inline design makes flow setting and plumbing easy. The hexagonal adjusting sleeve, which may be turned by hand, is only slightly greater in diameter than the tubing and has no protuberances to impair hook-up.

Each Valve Factory “Tuned” for Accuracy

To accomplish the perfect orifice concentricity that is necessary to produce the high performance of Dyla-Trols, each sleeve and body set is permanently mated during production.


Temperature Range

-40° F to 250° F (-40° C to 121° C)

Control

Models **MF1-12**, **MF1-25**, **MF1-37** and **MF1-50** are controlled flow in one direction, free flow in the other. **MF2-12**, **MF2-25**, **MF2-37** and **MF2-50** are controlled flow in both directions.

Symbols



MF1 Style



MF2 Style

Two-Hand Control Valves




Function of CSVs

Concurrent actuation of the recessed buttons generates a signal. Releasing one or both buttons immediately stops the signal which cannot be re-instituted until both buttons are again actuated concurrently.

Low Stress (LS) models are for high production applications where operator fatigue is a concern. Needing only 6 ounces of force to actuate, LS units ease the stress on worker's hands and wrists and greatly reduce the risk of repetitive motion disorders. Standard models require 18 ounces of force to actuate.


Consult website for dimensional drawings.

CSV-101, CSV-101LS & CSV-101W

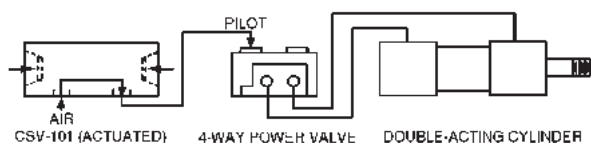


Actuates any 3 or 4-way air piloted, spring return power valve or small single-acting cylinders. ($C_v = 0.11$)

CSV-102, CSV-102LS & CSV-102W

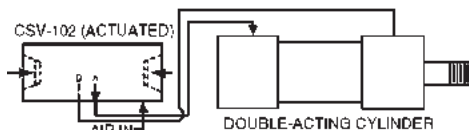

Complete power package containing a 4-way power valve ($C_v=1.00$) for direct actuation of single-acting or double acting air cylinders. Actuation sends a sustained air flow to one cylinder port. Releasing one or both buttons shifts the flow to the other cylinder port. Built-in mufflers reduce sound levels.

CSV-103

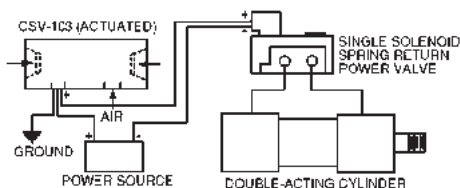

Converts an air signal into an electrical signal for actuating solenoid valves or other electrical devices. Concurrent actuation of the recessed buttons produces an electrical output. Releasing one or both buttons stops the output. The CSV-103 will not recycle until both triggers are released and again actuated concurrently. Internal switch rated at 15 amps, 480 VAC. Includes lead wire and receptacle.

For Safer Operation of Your Machinery


CSVs are two-hand anti-tiedown controls. When used, they provide safer operation of air presses, drill fixtures, clamping fixtures, cylinders, valves, or light assembly equipment. Models 101, 101LS, 102, 102LS and 103 have compact and completely self-contained controls, recessed actuation buttons built in the ends and a universal mount for convenient positioning. For remote two-hand, anti-tiedown operations, see model CSV-107.

CSV-101W & CSV-102W

CSVs are designed for use in a wash-down environment. The units provide the same pilot and power functionality of the CSV-101 and CSV-102, respectively. The logic circuitry is housed in a fiberglass industrial control panel enclosure, providing excellent chemical and corrosion resistance.

CSV-107 Logic Unit Responds To Remote Signals

CSV-107 is designed to actuate 3 or 4-way air piloted, spring return power valves or directly power smaller single-acting cylinders. A signal can only be initiated by concurrent actuation from two remote inputs. Releasing one or both buttons immediately stops the signal and the unit cannot recycle until both signals are again simultaneously actuated. ($C_v = 0.11$)

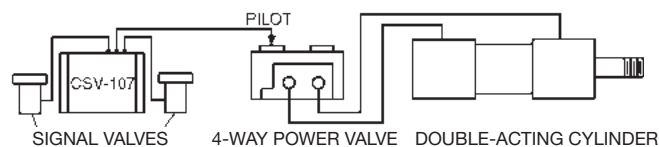

The CSV-107 may be purchased alone or with low stress signal valves (LS1, LS2). For information on Mead Low Stress Valves, which are offered with CSV Low Stress (LS) units, please refer to page 19. Push-to-connect fittings included on all pneumatic models.

Model No.	Function	Ports (NPTF)
CSV-101	Actuation of Power Valve	(2) 1/8"
CSV-101W	Actuation of Power Valve	(3) 1/8"
CSV-101LS	CSV-101, with Low Stress Actuation	(2) 1/8"
CSV-102	Direct Actuation of Air Cylinder or Air Press	(3) 1/4" Fittings
CSV-102W	Direct Actuation of Air Cylinder or Air Press	(6) 1/4" Fittings
CSV-102LS	CSV-102, with Low Stress Actuation	(3) 1/4" Fittings
CSV-103	Electrical Actuation of Solenoid Valve	(1) 1/8"
CSV-107	Remote Logic Unit Only	(3) Fittings
CSV-107LS1	Logic Unit, (2) LTV-PBGF Low Stress Valves	Included for
CSV-107LS2	Logic Unit, (2) LTV-PBGF Low Stress Valves	5/32" OD Tube


NOTE: Operating pressure range is 70-100 PSI.

Warning: CSVs are intended to operate pneumatic valves and cylinders. They are not meant to be used on full or partial revolution fly wheel presses, power brakes, or other similar devices.

Warning: Actuators for CSV-107 must be positioned so that they may not be accidentally tripped or operated in an unsafe manner. Do not actuate CSV-107 with foot operated valves.



AP-42P
1/4 Ton Arbor Press
Versatile, light-duty press.
Single-acting, spring return.

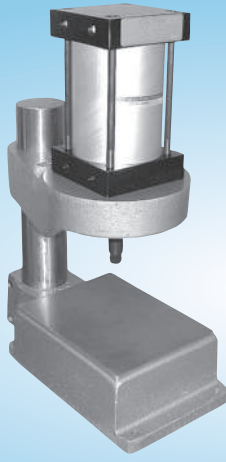

CP-400P
3/4 Ton Column Press
Column provides infinitely
variable daylight settings and
permits radial swing.



AP-400P
3/4 Ton Arbor Press
Heavy-duty cast iron frame
is extremely rigid.



AP-600P
1-3/4 Ton Arbor Press
Welded steel plate frame. Cylinder
mount and table are milled to
provide precise rod alignment.

Air Presses Automate Tasks

Economical air powered presses reduce production costs by automating crimping, heat sealing, bending, forming, pressing, swaging, riveting and burnishing operations. Easy hook-up. Just attach to your shop air supply. No wiring, pumps, or motors needed.

Single-Acting Air Presses

Besides the AP-42P shown on this page, Mead offers two other single-acting alternatives. AP-122 combines a 4" bore single-acting cylinder (H-122) with the AP-400M press stand. AP-283 combines a 6" bore cylinder (#6030403) with the AP-600M press stand. A PL-600 cylinder-to-stand adapter plate is required for mounting this cylinder on the stand. Full dimensional drawings are given on page 60.

		1/4 Ton Arbor Press	3/4 Ton Column Press	3/4 Ton Arbor Press	1-3/4 Ton Arbor Press
	Press Stand Only	AP-42M	CP-400M	AP-400M	AP-600M
	Cylinder Mounted on Stand **	AP-42P	CP-400P	AP-400P	AP-600P
	Complete Press with Two Hand Controls (Not Piped)	-	CP-400C	AP-400C	AP-600C
	Double Rod Option (DR)	NA	•	•	•
	Non-Rotating Option (NR)	NA	•	•	•
Specifications					
	Cylinder Bore (in.)	2-1/4	4	4	6
	Thrust at 100 PSI (lbs.)	353	1257	1257	2827
	Standard Stroke Length (in.)	2 (Spr. Ret.)	4*	2 1/2*	4*
	Surface Table Width and Depth (in.)	3 x 3	6-7/8 x 8-3/4	5 x 5	8 x 8

NOTE: Standard column for Column Press is 14" long. Longer column (18" max.) is available upon request.
* Additional stroke available to 4" on AP-400 and to 6" on AP-600. Consult factory.
** Consult website for press hookups.

Press Options

Rod Speed Reduction

To control the downward speed of double-acting presses, place a Mead Dyla-Trol valve (see page 56) in the bottom cylinder port so that incoming air flows freely and exhausting air is metered. Model MF1-25 is suitable for the control of all presses under most conditions.

Two Hand Control Unit

Models with a "C" suffix are supplied with a two hand anti-tiedown unit. Recessed trigger buttons, located in each end of the compact unit, require the press operator to use both hands concurrently to operate the press. Models CP-400C and AP-400C include the CSV-102, which has a built-in power valve. Model AP-600C includes the CSV-101 and a 1/2" power valve (C5-3). All air logic. No electrical wiring. See page 57 for the two hand controls. See pages 16-17 for the power valve.

Double Rod Option (DR)

Double-acting press cylinders may be ordered with the piston rod extending from both ends. This minimizes rod deflection and make it possible to adjust stroke length. When a CP-400 is ordered with double rod, spacers are supplied to facilitate adjustment.


Press Speed Boost

Quick exhaust valves increase rod speed by allowing exhaust air to be dumped right at the cylinder instead of passing back through the directional valve. If speed is to be increased in both directions on double-acting presses, use one QEV in each port. Use model QEV-3 with 1/4 ton presses and model QEV-2B on 3/4 and 1-3/4 ton models. See page 63 for more information regarding QEVs.

See page 60 for Air Press dimensions.

Heavy Multi-Stage Press

HP-600P

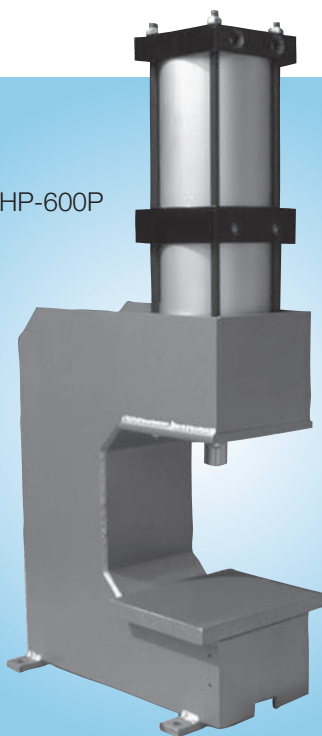

Mead's latest press utilizes multiple stages to achieve a dramatically increased output force. A standard shop air input (110 PSI) can achieve a push output force of up to 6057 lbs. The standard model has two stages, but upon request Mead can provide more stages which means higher output force at an even lower input force.

Economical air powered presses reduce production costs by automating crimping, heat sealing, bending, forming, pressing, swaging, riveting and burnishing operations. Easy hook-up: just attach to your shop air supply. No wiring, pumps, or motors needed.

Operating Specifications

Temperature Range:	-40° F to 250° F (-40° C to 121° C) (to 400° F [204° C] on request)
Lubrication:	For maximum cylinder life, non-detergent petroleum-based oil is recommended. Non-lube seals available.
Filtration:	Standard 40 micron filter for maximum life.
Maximum Pressure:	110 PSI
Maximum Output Force:	6057 lbs.
Thrust Multiplier:	55*

* To determine thrust at other inlet pressure, multiply factor by desired pressure.

Ordering Information


Model No.	Description
HP-600M	Press stand only
HP-600P	Cylinder mounted on stand
HP-600C	Complete press with 2 hand controls (not piped)

Specify:

Throat dimension "T" Min= 1/2" Max=9"

Stroke dimension "S" Min= 1/4" Max=9"

Sample Part

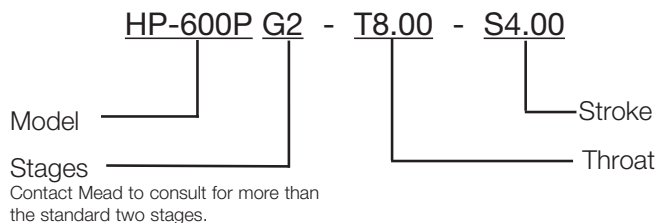

NOTE: Stroke cannot exceed throat.

Available Cylinder Options:


CR = Cushion Rear
IPR = Inter-Pilot Rear
MP = Magnetic Piston

Consult Factory for Other Options.

Consult Factory for Press Hook-ups.

Materials	
Rod Bearing:	Teflon-impregnated, hardcoated aluminum
Heads:	Machined from solid aluminum bar; black anodized
Tubes:	Aluminum hard anodized to 60 Rc
Piston:	Solid high alloy aluminum
Piston Rod:	High tensile ground and polished hard chrome plated steel
Piston and Rod Seals:	Wear compensating Buna-N vee rings. Self-lubricating seals also available (see Option NL).
Tube Seals:	Buna-N O-rings
Rod Wiper:	Dupont Teflon®
Tie Rods:	High tensile steel torqued to allow for flexure.
Stand:	Welded steel frame
Weight:	250 lbs.

Dimensions

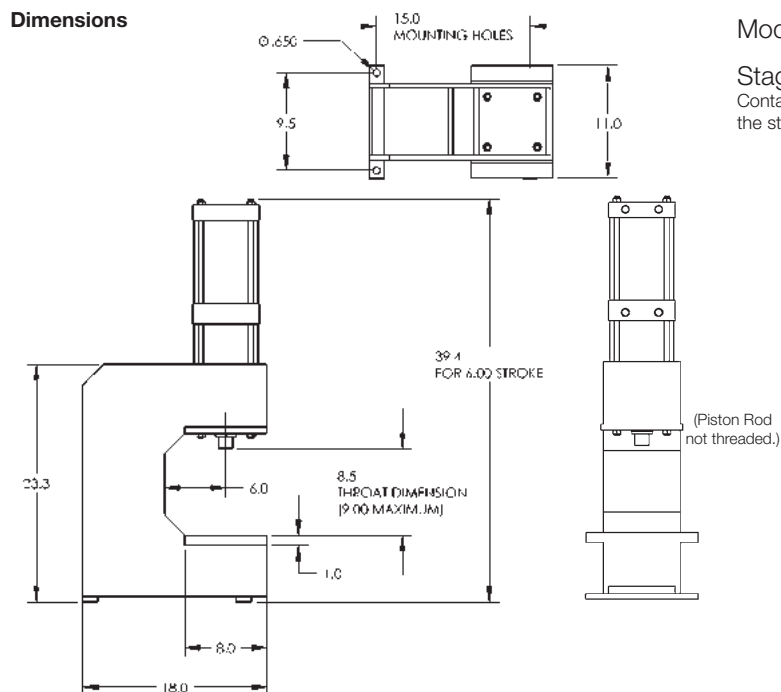


NOTE: For each inch of stroke overall height increases by 2".

Air Press Dimensions

AP-42


Shipping Weight: Stand Only = 9 lbs.
Stand/Cyl. = 10 lbs.

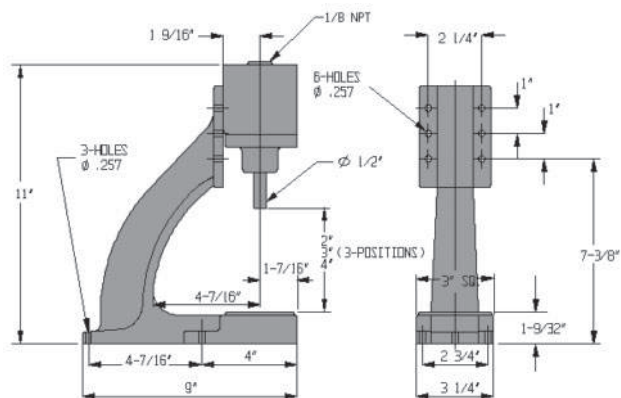

This press combines the AP-42M press stand with a Mead H-42 single-acting cylinder (2 1/4" bore, 2" stroke). Cylinder details are on page 48.

AP-122


Shipping Weight: Stand Only = 45 lbs.
Stand/Cyl. = 52 lbs.

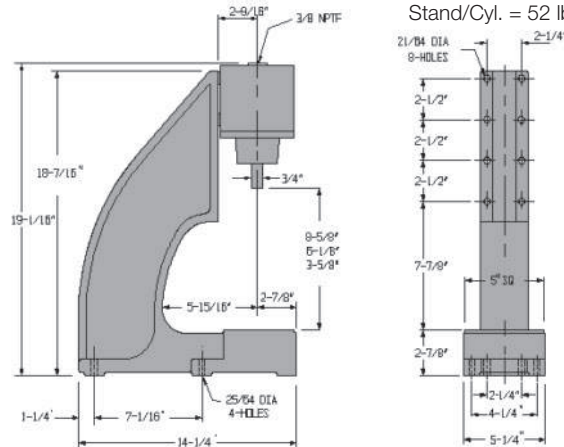

This press combines the AP-400M press stand with a Mead H-122 single-acting cylinder (4" bore, 2 5/8" stroke). Cylinder details are on page 48.

AP-400


Shipping Weight: Stand Only = 45 lbs.
Stand/Cyl. = 52 lbs.

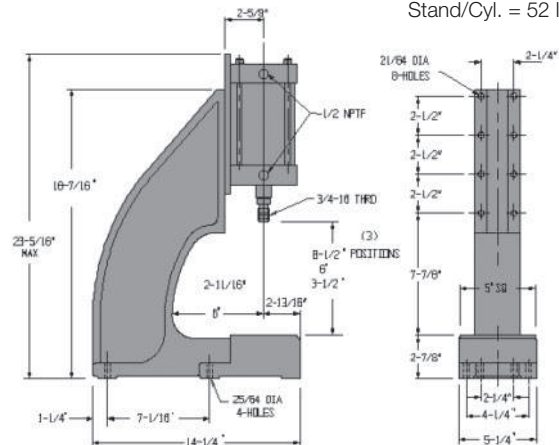

For non-standard double-acting service with strokes up to 4", use pages 30-31 to create a 4" bore cylinder for use with this stand. The PL-400 cylinder-to-stand adapter plate will be required.

CP-400


Shipping Weight: Stand Only = 90 lbs.
Stand/Cyl. = 105 lbs.

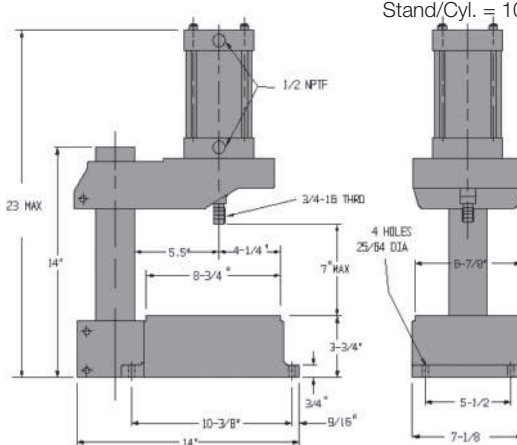

For other stroke lengths, heavy-duty or other options, use pages 30-31 to create any 4" bore cylinder for use with this press stand.

AP-283


Shipping Weight: Stand Only = 85 lbs.
Stand/Cyl. = 125 lbs.

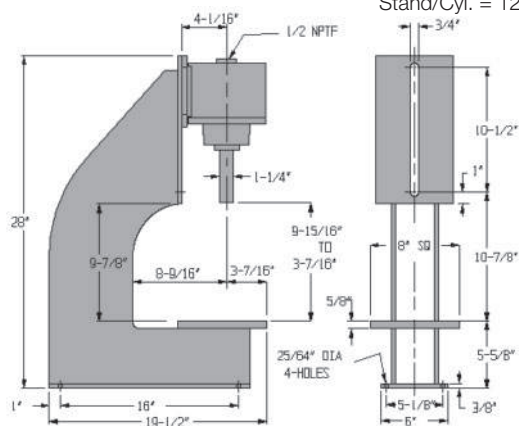

This press combines the AP-600M stand with Mead's #6040303 (H-283 with 3" longer ram, p. 48) single-acting cylinder (6" bore, 3" stroke). A PL-600 cylinder-to-stand adapter plate is required to mount this cylinder.


AP-600

Shipping Weight: Stand Only = 85 lbs.
Stand/Cyl. = 120 lbs.

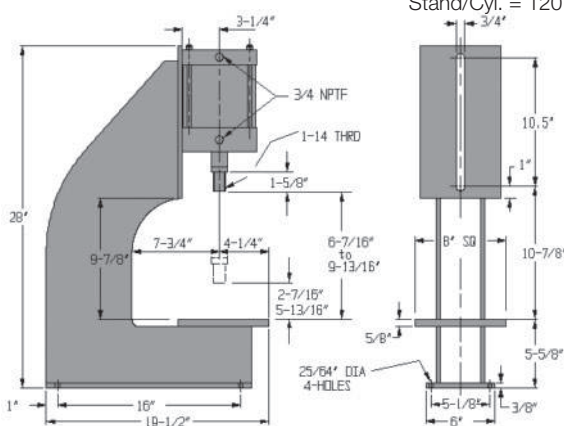


For non-standard double-acting service with strokes up to 6", use pages 30-31 to design a 6" bore cylinder for use with this stand.

Air Impact Hammer

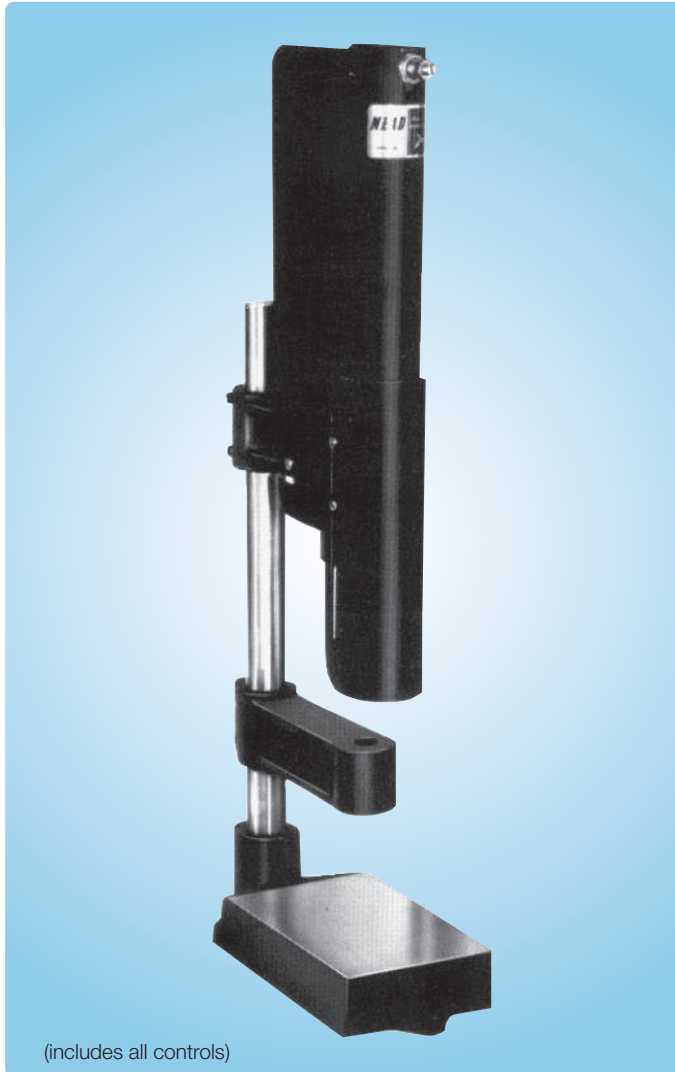


AH-65 delivers a consistent, uniform blow. It is designed to accelerate, then strike a tool which may be guided by the supplied tool arm. A spring returns the hammer to the start position after the work is completed. The head must be free with no fixturing or tooling attached directly to it.



The air hammer's impact force may be adjusted from a few ounces to 4,500 lbs. by raising or lowering the air hammer, adjusting the air trip needle valve, or adjusting the air pressure. The air trip mechanism releases the hammer head when the air in the chamber reaches a pre-set level. The hammer head accelerates to the end of its stroke, with a longer stroke (6" maximum) creating greater velocity and greater impact.


All Controls Included

AH-65 is supplied with a CSV-102 two-hand control unit. The CSV-102 requires the operator to use two hands concurrently and also provides the power valve to run the hammer. See page 57.

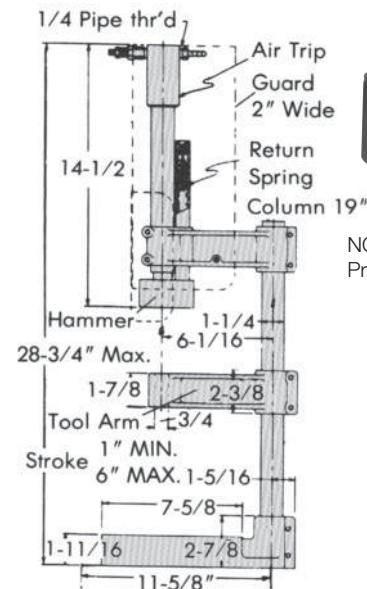

NOTE: Width is 4-11/16"
Pressure Range: 25-175 PSI


Collet Fixtures

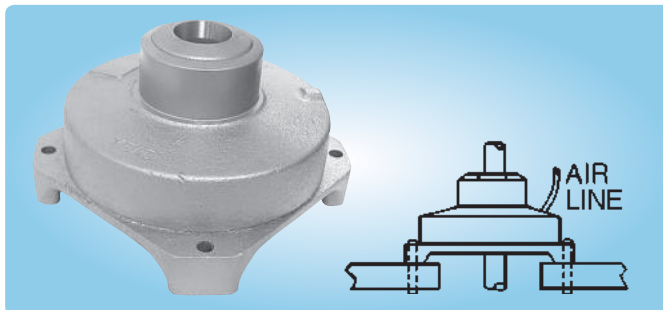

Use collet fixtures to evenly and firmly grip round bars during drilling, machining, positioning, or assembling tasks, without marring the surface of the bars.

Workpieces may pass through the fixture. Model PCF accepts standard 3C collets. Model LS-1 accepts standard 5C collets. A collet wrench is supplied to simplify collet installation and removal. Mead does not offer collets.

Double-acting collet fixtures must be actuated by a four-way valve. Model PCF will prevent a round, smooth bar from turning at up to 10 ft-lbs of applied torque; model LS-1 at up to 40 ft-lbs at 100 PSI.

Dimensions & Specifications

Model No.	Applied Holding Pressure @ 100 PSI; Max. 120 PSI	Collet Type	Round Stock Capacity	A (sq.)	B (sq.)	C	D (4)
PCF	3,400 lbs.	3C	1/2"	4-7/8"	4"	3-7/16"	.257"
LS-1	7,100 lbs.	5C	1"	7"	5-7/16"	4-9/16"	.390"

Right Angle Flow Controls (RAF and RAFK)

Mead's right-angle flow control valves provide fast, accurate control in a convenient, compact package. Designed specifically for controlling flow to pneumatic actuators, they come standard with push-in fittings, pre-applied Teflon based thread sealant, an adjustment depending on the type, and convenient swivel feature for ease of tubing alignment. Both the RAF and RAFK mount directly to your cylinder's ports. The RAF adjustment is a recessed screw driver slot. The RAF-K has a knob adjustment that can be tightened once set. For precision in-line flow controls, see Mead's Dyla-Trol® flow controls on page 56.

Specifications - RAF

Materials: Black Anodized Aluminum Body
Zinc Plated Brass Fittings
Stainless Steel Needle
Buna-N Seals

Pressure: 15 -145 PSI

Temperature: -14° F to 160° F (-26° C to 71° C)



Cracking Pressure: 5 PSI

Specifications - RAFK

Materials: Brass-Nickel Plated Body
NBR 70 Seals
C72 Dacromet Shaft Clip

Pressure: 15 -145 PSI

Temperature: 0° F to 160° F (-18° C to 71° C)

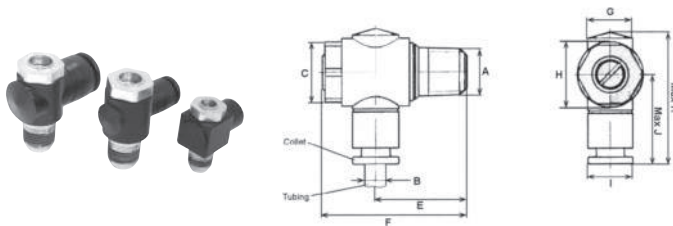

Ordering and Specification:

Model Number	A	B	C	E	F	G	H	I	J	K
RAF-5/32x2	1/8 NPFT	5/32"	.511	.780	1.26	.433	.591	.433	.843	1.24
RAF-4x2	1/8 NPFT	1/4"	.511	.780	1.26	.512	.591	.512	.944	1.33
RAF-4x4	1/4 NPFT	1/4"	.669	1.02	1.61	.512	.748	.512	1.06	1.50
RAF-6x4	1/4 NPFT	3/8"	.669	1.02	1.61	.709	.748	.709	1.06	1.57
RAF-8x8	1/2 NPFT	1/2"	.866	1.14	1.85	.709	.939	.709	1.14	1.73

Tube Part No.	O.D.	A Pipe Thd.	B	L1	L2 Min	L2 Max	CH
RAFK-2x2	1/8	1/8	.217	.827	1.614	1.830	.551
RAFK-5/32x2	5/32	1/8	.217	.827	1.614	1.830	.551
RAFK-4x2	1/4	1/8	.217	.866	1.614	1.830	.551
RAFK-4x4	1/4	1/4	.276	.984	1.850	2.086	.669

Female DIN Solenoid Connectors

Mead's 11mm Industrial B-type DIN solenoids feature a totally encapsulated coil with 3 male prongs, allowing fast and easy connections. A female DIN connector (ordered separately) quickly attaches to the solenoid's prongs and is secured by a single screw.

Mead offers 3 types of DIN connectors to facilitate connections to the solenoid. Model PVD1 is a connector with a 1/2" conduit entry and no lead wires. Model PVD2 also has a 1/2" conduit entry but includes 20' of cabled lead wire. Model PVD3 is a strain relief connector that includes 72' of cabled lead 18ga wire.




Model PVD1

Model PVD2

Model PVD3

DIN Connector Hook-Up Diagram (Not Polarity Sensitive)

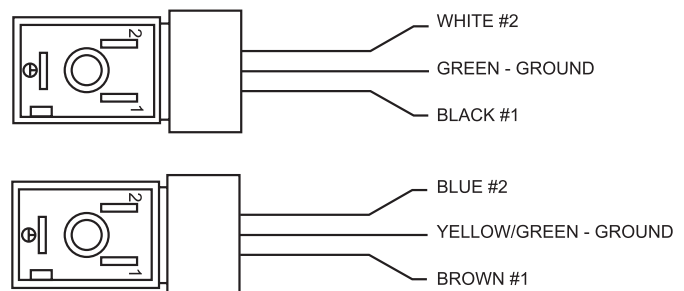

Manifold

Use the #20 die cast aluminum manifold to simplify piping and cut down on plumbing time. A 3/8" NPTF inlet port provides a common air source for up to eight 1/8" NPTF outlets.

Dimensions

Model Number	Length	Height	Width
#20	4"	1"	1-1/2"

Circuit Aids




Quick Exhaust Valves

Quick exhaust valves (QEV) increase cylinder rod speed by dumping exhaust air directly at the cylinder instead of back through the control valve. Use one QEV in each cylinder port to increase rod speed in both directions.

Using a quick exhaust valve to increase cycling speed allows a smaller, less expensive control valve to be used.

Circuit with Quick Exhaust Valves



Flow Patterns

#1B and #2B



#4, #5 and #6




Specifications and Dimensions

Model No.	Port	C _v	Length	Width	Height
#3 QEV	1/8"	.10*	.13‡	1/2"	1-13/16"
#1B QEV	1/4"	2.71*	2.83‡	1-3/4"	2-17/32"
#2B QEV	3/8"	3.13*	3.43‡	1-3/4"	2-17/32"
#4 QEV	1/2"	3.25*	3.52‡	2.89"	2.21"
#5 QEV	3/4"	3.78*	4.08‡	3.43"	2.55"
#6 QEV	1"	4.12*	4.40‡	4.26"	3.15"

* Inlet port through cylinder port

‡ Cylinder port through exhaust port

Pressure: 30 - 125 PSI #3 QEV, #1B QEV and #2B QEV
15 - 150 PSI #4 QEV, #5 QEV and #6 QEV

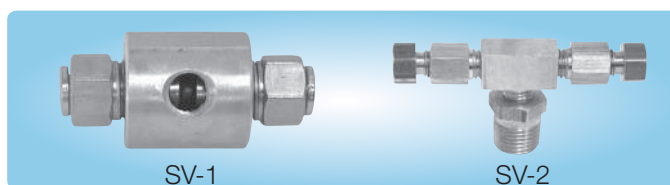


Shuttle Valves


Use shuttle valves to actuate a cylinder or valve from either of two air sources. Available for 1/8" and 1/4" tubing.

Flow Patterns

Cylinder Actuated by Source #1



Cylinder Actuated by Source #2



Specifications & Dimensions

Model No.	Port	C _v	Tubing	Body	Length	Width	Height
SV-2	1/8-27*	.04	1/8" OD	Brass	2"	7/16" Hex	15/16"
SV-1	1/8"	.32	1/4" OD	Alum.	2 3/4"	1"	1"

* 1/8-27 NPT male


Check Valves

Mead check valves are designed to allow full flow in one direction, and check or stop flow in the other direction.

Specifications	
Materials:	Nickel Plated Brass Body and Piston NBR 70 Seals Steel Spring
Pressure:	30-120 PSI
Temperature:	0° F to 160° F (-18° C to 71° C)
Cracking Pressure:	3 PSI


Check Valve Dimensions

Part No.	A NPTF	L	Es
CV-2	1/8	1.437	.512
CV-4	1/4	1.850	.669



Air Silencers & Breathers

MM, MMS, and MML air silencers reduce exhaust noise by approximately 20%. MMB breather vents prevent contaminants from entering the air component. All models are constructed of sintered bronze (MML are also housed in plastic). MML is designed to have 15% less pressure drop than MM or MMS models. MMP air silencers feature a unique stem for quick connections to tube collets.



MMS Silencers not only serve as sound reducers, but are also low cost speed controls. An adjustable needle valve in the top of each MMS allows for the setting of exhaust rates.

Specifications and Dimensions

Model No.	Pipe Size	Length	Width	Height	Per Box
MM-019	#10-32*	45/64"	5/16" Hex	45/64"	20
MMB-125	1/8" NPT	7/16"	7/16" Hex	7/16"	20
MM-125	1/8" NPT	1-1/8"	7/16" Hex	7/16"	20
MMS-125	1/8" NPT	29/32"	1/2" Hex	1/2"	20
MML-125	1/8" NPT	2-1/8"	13/16"	13/16"	20
MMB-250	1/4" NPT	5/8"	9/16" Hex	9/16"	10
MM-250	1/4" NPT	1-3/8"	9/16" Hex	9/16"	10
MMS-250	1/4" NPT	1-11/64"	9/16" Hex	9/16"	10
MML-250	1/4" NPT	2-1/4"	13/16"	13/16"	5
MMP-250	1/4" OD Stem	2-47/64"	13/16"	13/16"	1
MMP-006	6mm OD Stem	2-47/64"	23/32"	23/32"	1
MMB-375	3/8" NPT	3/4"	11/16" Hex	11/16"	5
MM-375	3/8" NPT	1-1/2"	11/16" Hex	11/16"	5
MMS-375	3/8" NPT	1-17/64"	11/16" Hex	11/16"	5
MML-375	3/8" NPT	3-7/16"	1-1/4"	1 1/4"	5
MMP-375	3/8" OD Stem	3-7/64"	23/32"	23/32"	1
MMP-010	10mm OD Stem	3-7/64"	23/32"	23/32"	1
MMB-500	1/2" NPT	7/8"	7/8" Hex	7/8"	5
MM-500	1/2" NPT	1-7/8"	7/8" Hex	7/8"	5
MMS-500	1/2" NPT	1-17/64"	7/8" Hex	7/8"	5
MML-500	1/2" NPT	3-9/16"	1-1/4"	1-1/4"	5

* Furnished with gasket

Special Applications

When you have a difficult or special application, Mead welcomes the opportunity to design the right product for your application. The following are some of the applications where we have designed a product to solve a problem.



CAR WASH EQUIPMENT



HOSPITAL EQUIPMENT



PRINTING PRESSES




LIQUID DISPENSING APPLICATIONS



SEWING MACHINES



SHOE ASSEMBLY EQUIPMENT



FOOD PROCESS EQUIPMENT



FUEL TREATMENT EQUIPMENT



DENTAL EQUIPMENT



AUTO ASSEMBLY



NUCLEAR FUEL REFINING



ROBOTIC APPLICATIONS




SAFETY EQUIPMENT



AGRICULTURAL EQUIPMENT

Contact Mead today for help solving your special application needs.

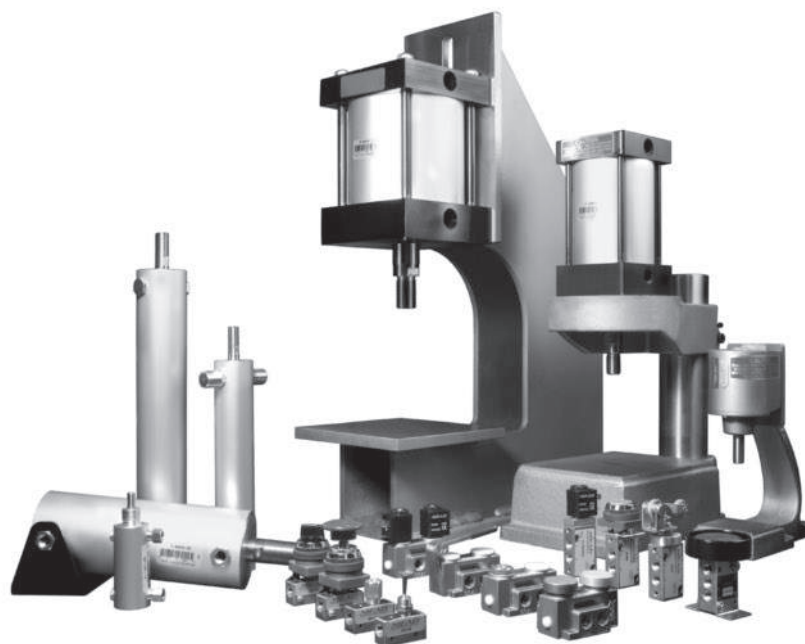

Product Index

- A**
- Adjustable Lever Valve 20
 - Adjustable Stroke Cylinder 48
 - Air Clamps 48
 - Air Collet Fixtures 61
 - Air Cylinders (see Cylinders)
 - Air Exhaust Silencers 63
 - Air Hammer 61
 - Air Piloted Valves 10-13
 - Air Presses (See Presses)
 - Air Timer 53
 - Air to Electric Converter 54
 - Air Valves (See Valves)
 - Air Tools 61
 - Anti-Tie Down Devices 57
- B**
- Ball Actuated Valves 18-21
 - Binary Valves 52
 - Bleed Type Valves 18
 - Breathers 63
 - Button Operated Valves 14-25
- C**
- Cam Operated Valves 20-25
 - Capsula Valves 16-17
 - Centaur Cylinders 44-45
 - Clevis Brackets 33-39
 - Clevis Mounted Cylinders 26-45
 - Collet Fixtures 61
 - Compact Cylinders 47
 - Controls, Presses 57
 - Controls, Valves 4-58
 - Cylinders
 - See "Cylinder Finder" 1
 - Adjustable Stroke 48
 - Clevis Mounted 26-44
 - Compact 47
 - Cushioned 26-44
 - Double Acting 26-44
 - Double Rod 26-44
 - Dyna-Mation 28-33
 - End of Stroke Sensors 54
 - Flange Mount (Front) 26-33
 - Flange Mount (Rear) 26-33
 - Flat Type 49
 - Flush Mounted 26-44
 - Foot Mounted 26-50
- Cylinders (Continued)**
- HD1 Series 34-41
 - HD Series 42-43
 - Hydraulic 26-42
 - Interchangeable (JIC) 34-43
 - Interchangeable (NFPA) 34-43
 - Inter-piloted 29-44
 - Low Profile 47
 - Miniature 49-56
 - Non-Lubricated 26-43
 - Nose Mounted 26-43
 - Pivot Brackets 26-43
 - Pivot Mounted 26-43
 - Reed Switches 29-47
 - Rod Clevis 31-42
 - Rod Eyes 31-42
 - Round Type 44-45
 - Single Acting 48
 - Space Saver 47
 - Spring Return 49-50
 - Square End 26
 - Stroke Sensors 54
 - Tie Rod Type 26-42
 - Trunnion Mounted 26-42
- D**
- DIN Connector 62
 - DIN Connector Solenoid 4-20
 - Directional Control Valves 4-25
 - Double Acting Cylinders
 - Centaur 44-45
 - Cushioned 26-42
 - Double Rod 26-42
 - DM1 26-33
 - DM2 26-44
 - Dyna-Mation 28-33
 - Interchangeable (NFPA) 34-43
 - Low Profile 47
 - Non-Lubricated 26-43
 - Round Type 26-44
 - Space Saver 47
 - Tie Rod Type 26-44
 - Double Air Piloted Valves .. 11-22
 - Double Bleed Valves 18
 - Double Rod Cylinders 26-33
 - Double Solenoid Valves 4-21
 - Dura-Matic Valve 18
- Dyla-Trol Flow Controls** 56
- Dyna-Coil Valves** 52
- Dyna-Mation Cylinders** 28-33
- E**
- Electric Switches 54
 - Emergency Stop Valves 21-23
 - End of Stroke Sensors 54
 - Exhaust Silencers 63
- F**
- Fingertip Operated Valves ... 21-25
 - Flange Mounted Cylinders
 - Front 26-41
 - Rear 26-41
 - Flat Cylinders 47-50
 - Flow Control Valves
 - Air Exhaust Silencer Type... 63
 - Built-In Valve 18
 - Dyla-Trol 56
 - Inline Type 56
 - Right Angle 62
 - Flush Mounted Cylinders .. 26-41
 - Foot Mounted Cylinders 26-41
 - Foot Operated Valves
 - Pedal Type 15-21
 - Treadle Type 25
 - Four-Way Valves 4-25
- G**
- General Purpose Valves 24-25
- H**
- HD1 Cylinders 34-41
 - Solid State Switches 29-47
 - Hammers, Air 61
 - Hand Operated Valves 15-56
 - Heavy Duty Cylinders 34-43
 - Hydraulic Cylinders 26-44
- I**
- Impulse Relay Valves 53
 - Isonic Valves 4-13
 - Isonic 2 & 3-Way Valves 4-9
 - Isonic 4-Way Valves 10-11
- J**
- JIC Interchangeable Cylinders . 28-43
- K**
- Knob Actuated Valves 20-55
- L**
- Lever Operated Valves 15-52
- Lockout Valve** 51
- Low Stress Valve** 19
- M**
- Manifold PowerStrip 12
 - Manifold Valves 4-21
 - Manifolds 62
 - Manual Overrides 4-15
 - Micro-Line Valves 22-23
 - Mufflers 63
- N**
- Normally Closed Valves 4-55
 - Normally Open Valves 4-55
 - Nova Valves 14-15
- O**
- One-Way Roller Leaf Valves ... 20-22
- P**
- Palm Operated Valves 19-23
 - Panel Mounted Valves 21-35
 - Pilot Valves 10-24
 - Pin Plunger Operated Valves .. 20-23
 - Plunger Operated Valves... 20-23
 - Poppet Type Valves 5-25
 - Press Controls 57
 - Presses, Air
 - Arbor Type 58
 - Bench 58
 - Column Type 58
 - Stand 58
 - PTO Valves 55
 - Pulse Valves 53
 - Pushbutton Operated Valves .. 15-20
- Q**
- Quick Exhaust Valves 63
- R**
- Reed Switches 29-47
 - Rod Actuated Valves 20-22
 - Rod Alignment Couplers 29
 - Rod Clevises 29-44
 - Rod Eyes 26-31
 - Roller Operated Valves 20-22
 - Round Cylinders 44

S

Safety Devices.....	21-23
Selector Valve.....	52
Shuttle Valves.....	63
Single Solenoid Valves	
Direct Acting	4-52
Pilotd.....	4-52
Slide Type Valves	51
Solenoid Valves	
DIN Connector Type	4-23
Double	4-23
Plug -In Type	4-23
Single (Direct).....	4-23
Single (Pilotd)	4-23
Speed Control Valves	
(See Flow Control Valves)	
Spool Type Valves.....	4-25
Spring Return Cylinders	54
Stacked Valves.....	4-13, 18-19
Sub-Base Mounted Valves	16-18
Switches	
Air Operated	8-17, 18-21
Bleed Limit.....	18
Electric.....	54
Limit	20-23
Reed	29-47
Solid State	29-47

T

Three Position Valves.....	21
Three Way Valves.....	4-23
Timers, Air	53
Toggle Lever Valves	20-23
Treadle Type Foot Valve.....	25
Trunnion Mounted Cylinders....	28-44
Two-Hand Anti Tie Down	57

Twist Valves.....	20-23
Two Position Valves	4-52
Two Way Valves	
Poppets	5-25
Solenoid.....	4-52

V

Valves	
See "Valve Finder"	2-3
ACV Valve	55
Adjustable Lever	20-22
Air Pilotd	10-24
Air to Electric Converter.....	54
Ball Actuated	20-23
Bleed Type.....	14
Button Operated	15-23
Cam Operated	20-23
Capsula.....	16-17
Dash Mounted	55
DIN Type	46
Directional Control.....	4-23
Double Air Pilot.....	10-21
Double Bleed	14
Double Solenoid	4-20
Dura-Matic	18
Dyal-Trol	56
Dyna-Coil	52
Electric Switches	54
Emergency Stop	21-23
Fingertip Operated.....	21
Flow Control	62
Flow Control Air Exhaust	
Silencers	63
Four Way	4-21
Hand Operated	15-26

Valves (Continued)

Impulse Relays	53
Knob Actuated.....	20-23
Lever Operated.....	15-23
LTV Type.....	20-21
Manifold.....	4-21
Manual Overrides.....	4-15
MHL Valves.....	51
Micro-Line.....	22
Nova	14
One Way Roller Leaf	20-22
Palm Operated.....	20-21
Panel Mounted	20-56
Pilotd.....	8-22
Pin Plunger	20-23
Plug In Solenoid.....	4-22
Poppet Type	7-23
Press Control	57
Pressure Held	16
Pressure Released.....	16
Pressure Pilotd	10-16
PTO.....	55
Pulse Type	53
Push Button Operated... ..	20-25
Quick Exhaust.....	63
Rod Actuated.....	20-23
Roller Actuated	20-23
Safety.....	20-23
Selector Valve.....	20-23
Shuttle.....	63
Time Delay	53
Toggle Lever	20-23
Twist	20-23
Two Position	4-25
Two Way	4-25
Vacuum.....	4-25

Index	Accessories	Production Devices	Specialty Valves	Cylinders	Control Valves	Reference
-------	-------------	--------------------	------------------	-----------	----------------	-----------

Reference

Control Valves

Cylinders

Specialty Valves


Production Devices

Accessories

Index



Basic Pneumatic Circuit Structure

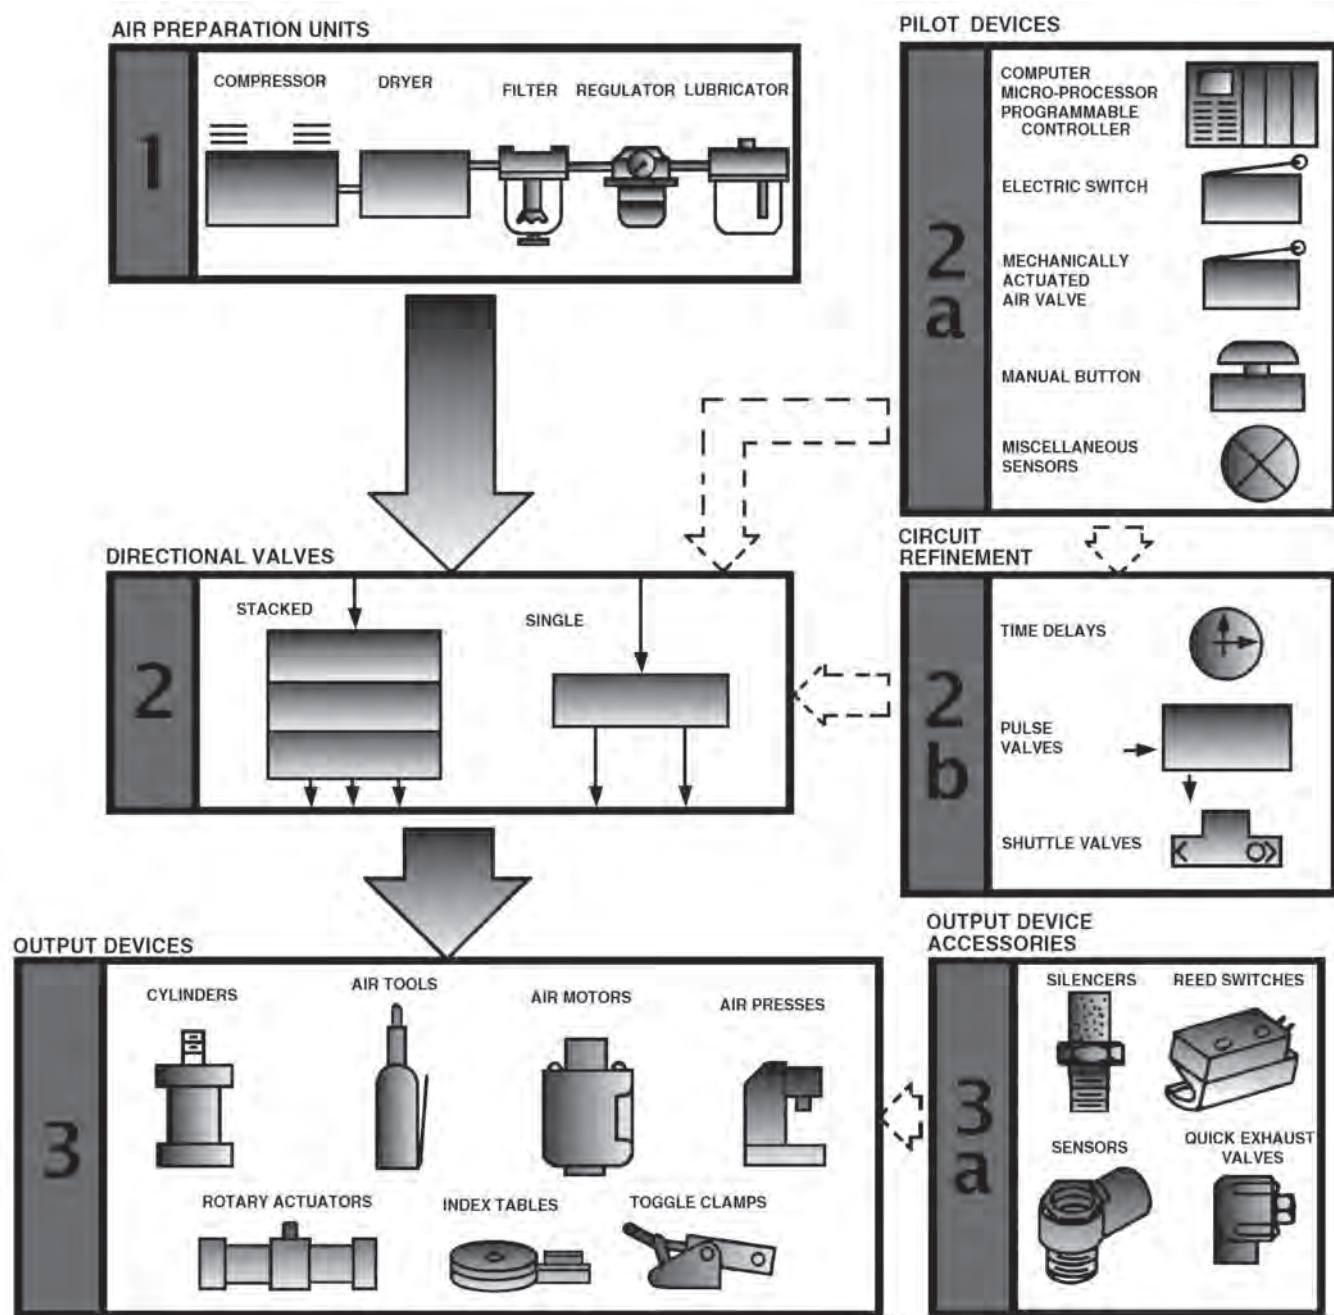**1. Air Preparation Units**

Air is compressed by the compressor, moisture is removed by the dryer, cleaned by the filter, adjusted to the correct pressure by the regulator and an oil mist is added by the lubricator. This process results in properly prepared air.

2. Directional Valves

Compressed air is fed to directional valves. Directional valves may be single valves or a stack of two or more valves with a common inlet.

2a. Pilot Devices

Pilot devices are used to shift the directional valves in Step 2.

2b. Circuit Refinement

The output from Step 2a may be refined by using timers, impulse relays, shuttle valves, or other circuit aids.

3. Output Devices

Shown is a sampling of air devices that may be controlled by Steps 1 through 2b.

3a. Output Device Accessories

Output device accessories may be used to control the speed or sense a position in the output device.

Your stocking distributor is:



Mead Fluid Dynamics

4114 North Knox Avenue Chicago, IL 60641

Phone: 773-685-6800 Toll Free: 877-MEAD-USA Fax: 773-685-7002

Email: sales@mead-usa.com www.mead-usa.com

Bimba Manufacturing Headquarters

P.O. Box 68 Monee, Illinois 60449-0068

Phone: 708-534-8544 Toll Free: 800-44-BIMBA Fax: 708-235-2014

Email: cs@bimba.com www.bimba.com

BIMBA BRANDS | ACRO | MEAD | MFD | PNEUMADYNE | TRD

PNEUMATIC • ELECTRIC • HYDRAULIC ACTUATORS FITTINGS — MANIFOLDS — VALVES — AIR PREPARATION — SAFETY & PRODUCTION



Worldwide distribution means there is a professional stocking
Bimba distributor nearby ready to service your needs.



National
FLUID POWER
Association®
MEMBER