

KP SERIES

Unitary Piston Compressor/Vacuum Pumps



Benefits

- Long Service Free Life
- Low Vibration & Sound Level
- Corrosion Resistance
- Cool Operating Temperature
- Restart Against Load

Features

- Thin-walled, Hard Coated Anodized Cylinder
- Oil-less, Non-lube PTFE Piston Seal
- Permanently Lubricated Ball Bearings
- Balanced Eccentric/Connecting Rod Assembly
- Vibration Isolators
- Epoxy E-Coated Wetted Aluminum Components
- Stainless Steel Valves, Retainers and Screws
- Die Cast Aluminum Components
- High Torque DC Motor



TruNorth Components, Inc.
"A Principle Driven Company"


TruNorth Components, Inc.

2100 Sunset Drive
Plymouth, WI 53073
Phone: (855)449-7867

www.trunorthcomponents.com






KP Series Performance Data

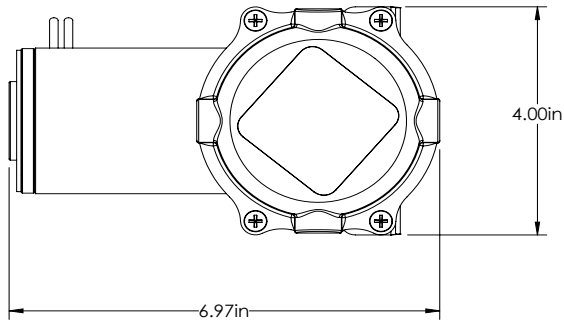

Model Number	KP12	KP20
Head Configuration	Pressure/Vacuum	Pressure/Vacuum
Free Air Flow	.65 SCFM	1.60 SCFM
Max Intermittent Pressure	120 PSIG	40PSIG
Max Restart Pressure	120 PSIG	40 PSIG
Max Vacuum	27" Hg	27.5" Hg
Max Restart Vacuum	27" Hg	27.5" Hg
Max Ambient Air Temp	125° F	125° F
Min Ambient Start Temp	-20° F	-20° F
Motor Voltage	12V DC	12V DC
Motor Type	Permanent Magnet	Permanent Magnet
Current at Rated Load	14.8 Amps	18.4 Amps
Power at Rated Load	178 Watts	221 Watts
Starting Current (Locked Rotor)	55 Amps	65 Amps
Min Full Load Speed	3000 RPM	2750 RPM
Thermal Protector	Optional	Optional
Weight	5.4 lbs	5.5 lbs
Duty Cycle	TBD	TBD

Note: Duty Cycle, time on/time off to be determined based on each customer's application requirements.

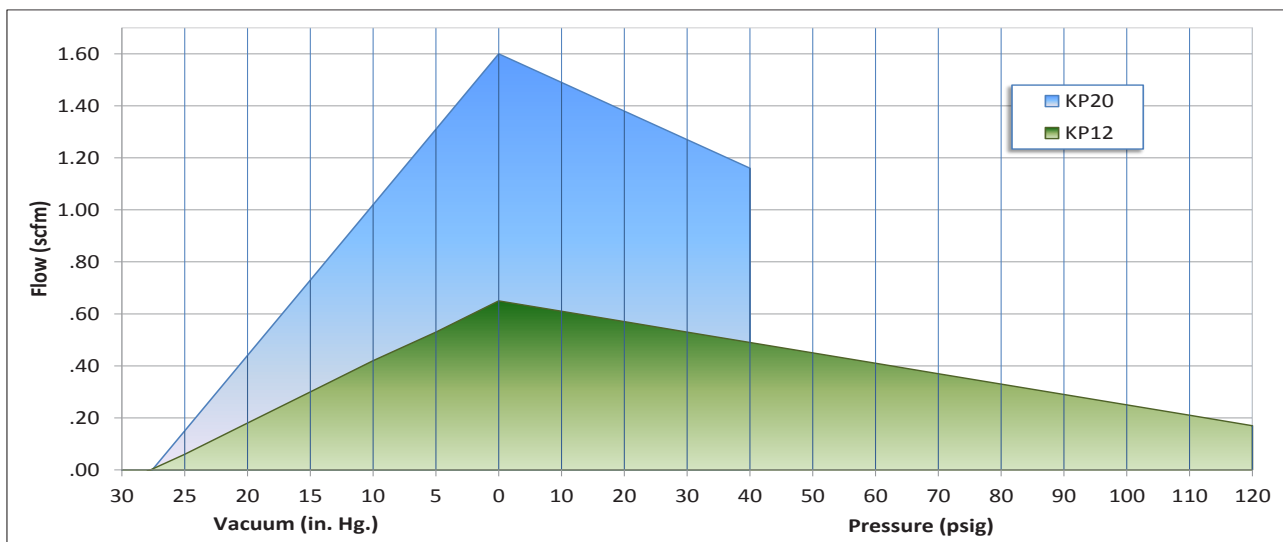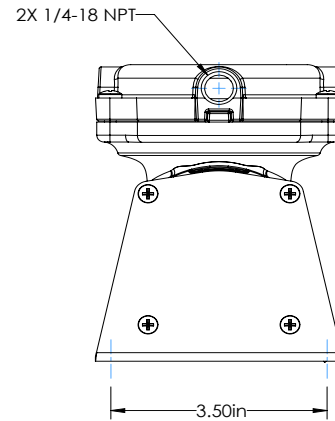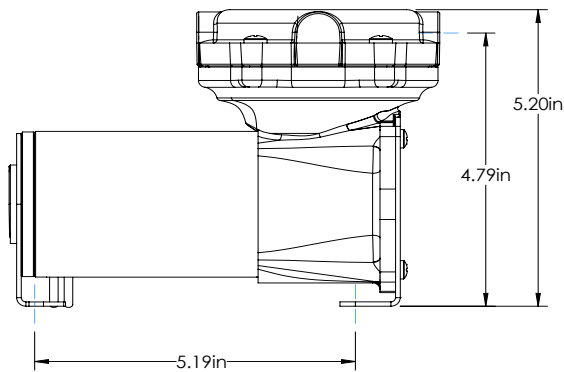

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of TruNorth products. It is the responsibility of the user to determine if this product is suitable for the intended use. The user assumes all risk and liability whatsoever in connection therewith. TruNorth does not warrant, guarantee or assume any obligation in connection with this information.