

DOUBLE-SHEET

INDUCTIVE SENSORS

KEY ADVANTAGES

- ✓ Double-sheet detection (steel and aluminum) with sensitivity of 0.8 - 1.2 mm per sheet
- ✓ Full Inox: extremely robust one-piece stainless-steel housing
- ✓ Corrosion resistant
- ✓ IP 68 and IP 69K
- ✓ Pressure resistant up to 80 bar

RANGE OVERVIEW

Housing size

Full Inox

DOUBLE-SHEET

M30

p. 161

FAMILY


HOUSING SIZE

OPERATING DISTANCE MM

INDUCTIVE

WIRING DIAGRAM

PNP NO

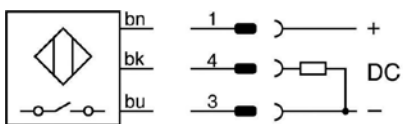

DATA

Housing material

Connection

Degree of protection

Mounting

Max. switching frequency

Supply voltage range

Ambient temperature range

Output current

PNP NO

Description

