


25-2525 Profile

25-2525 is a 25mm x 25mm metric 25 series square T-slot profile with four open T-slots, one on each 25mm face. The profile is smooth, which makes it resistant to dirt and debris buildup while also being easy to clean. The 25-2525 profile is compatible with all 25 series fasteners. This profile lends itself to clean room applications, guards, enclosures, or workstations.

PROFILES

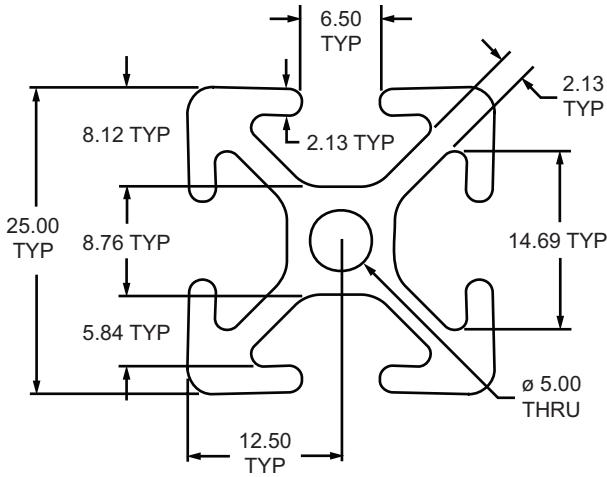

Part No.	Series	Stock Length	Material	Alloy**	Finish	Drop Lock	Moment of Inertia	Surface Area	Yield Strength	Modulus of Elasticity	Weight
25-2525 *	25	4 or 6 Meter	Aluminum	6105-T5	Clear Anodize	2°	IX = 1.7726 cm ⁴ IY = 1.7726 cm ⁴	2.746 cm ²	241.1 N / mm ²	70,326.5 N / mm ²	0.7426 kg / m
25-2525-Black *		4 Meter			Black Anodize						
25-2525-Black-FB		per millimeter			Black Anodize						

* The above profiles are sold per millimeter or stock length.

** Or comparable

Standard Machining Services

Service No.	Series	Service Description	Reference Page
25-7005	25	Cut to Length	859
25-7051	25	Access Hole	863
25-7042	25	Anchor Counterbore	865
25-7063	25	Tap Profile End	862